


# Mortice Magnet

## 10000

- Brushed stainless steel
- Voltage tolerance:  $\pm 15\%$
- Current draw: 500mA@12Vdc, 250mA@24Vdc (at temperature 20°C)
- Magnetic bond sensor monitor output (10000R) (SPDT rated 0.25A@12Vdc), remotely monitors the door lock or unlock status. (N.C. Output-Door opened; N.O. Output-door closed)
- Operating temperature: 10-15°C (14-131°F)
- Humidity: 0-95% non-condensing
- Lock's surface temperature (when power is on) current temperature  $\pm 20\%$
- Holding force: Up-to 600lbs (272kg)
- Weight: 2.0kg (approx)

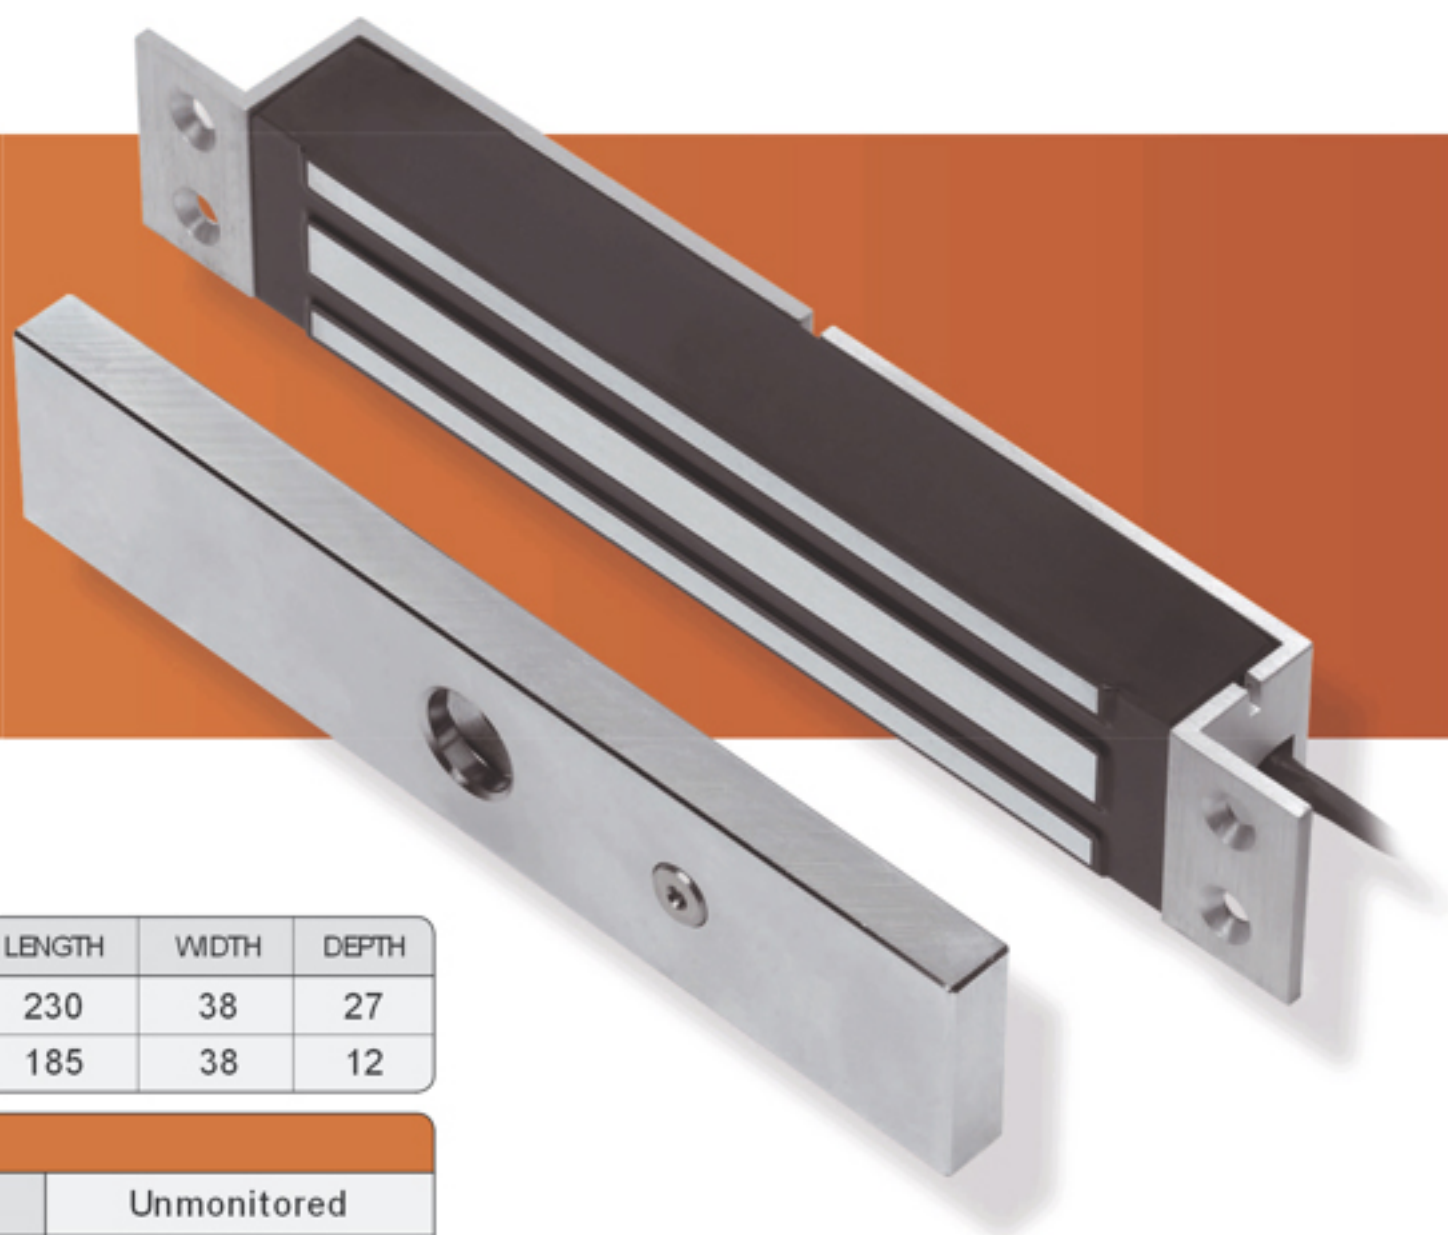

DIMENSIONS	LENGTH	WIDTH	DEPTH
Magnet	230	38	27
Armature Plate	185	38	12

VARIATIONS	
10000	Unmonitored
10000R	Monitored

All dimensions in mm