


AUDIO SPEAKER UNIT

Audio speaker unit for Simplebus system with terminal board and double amplifier, watertight loudspeaker and electret microphon. Both, microphone and loudspeaker volumes, can be adjusted from the front. Complete with microprocessor and DIP SWITCH with 8 positions for programming the calls to the users. 12 V AC power supply (use Art. 1395UL). Electronic door-opening function on board (3A). To be inserted in modules Art. 3320/0, 3320/1 and 3320/2. Dimensions: 47x227x147

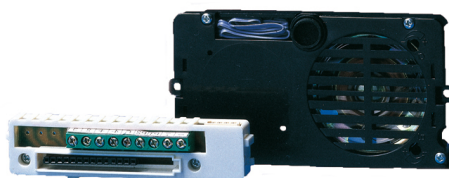

Compatibility

Simplebus Top system:	Yes
Simplebus Color system:	Yes
Simplebus 2 system:	Yes
Comelbus system:	Yes

Audio/video specifications

Audio system:	Yes
Audio/video system:	Yes

Functions - Settings

Key button function:	Yes
Loudspeaker volume control:	Yes
Microphone volume control:	Yes

Technical properties

Temperature range:	-25 / 55
--------------------	----------

Electrical specifications

Maximum current absorption (mA):	200
----------------------------------	-----

General info

EAN product code:	'80239031 18483
Intrastat code:	85176920
Product height (mm):	55
Product width (mm):	102
Product depth (mm):	35

DATA SHEET

Packaging

Single pack height (mm):	53
Single pack width (mm):	110
Single pack weight (g):	200
Single pack depth (mm):	94
Single pack volume (dm ³):	0,548