


NOTE:
THIS DRAWING INDICATES AND ASSUMES THE USE OF
BPT COMPOSITE CABLES OR A SUITABLE EQUIVALENT.

**ENSURE ALL ADDITIONAL CONNECTIONS ARE
A MINIMUM OF 0.5MM CSA PER CORE.**

NOTE: CABLE EQUIVALENTS

VCM/130 = RG59 COAX + 4 CORES @ 1.0MMSQ + 8 CORES @ 0.5MMSQ

VCM/60 = RG59 COAX + 2 CORES @ 1.0MMSQ + 3 CORES @ 0.5MMSQ

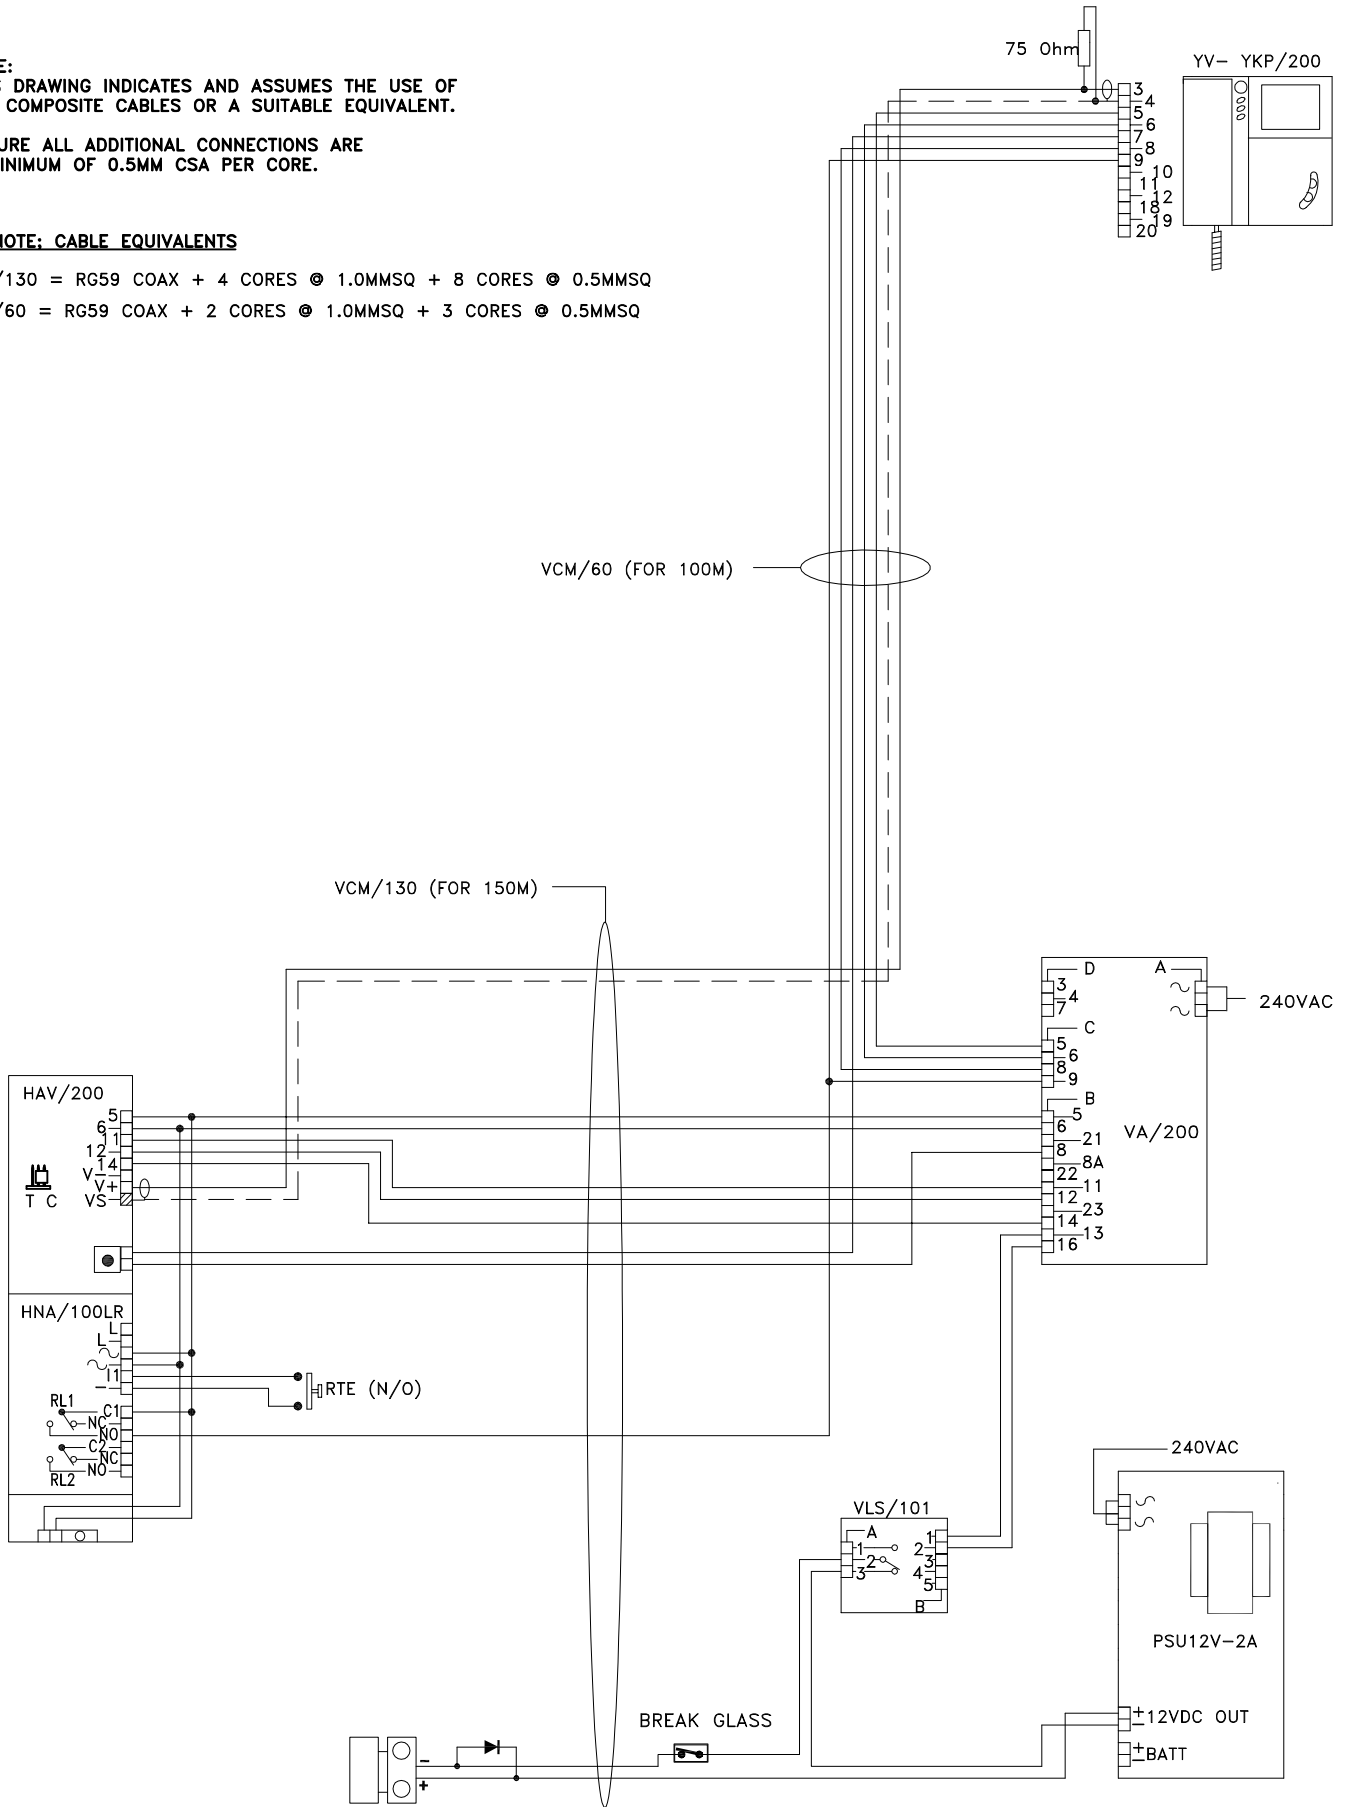

IT IS VERY IMPORTANT THAT A SUPPRESSION DEVICE BE FITTED
DIRECTLY ACROSS THE DC RELEASE SUPPLY LINES. IF THE
RELEASE IS NOT INTERNALLY SUPPRESSED USE A 1N4003

BPT (UK) LTD.
HERTS. ENGLAND

PREPARED FOR
INSTALLER INFORMATION

DATE: 22/10/04 DRAWN: RC

REVISED:

DRAWING TITLE: SINGLE HOUSE INSTALLATION USING 1 TARGHA VIDEO
ENTRY PANEL WITH KEYPAD, MAGNET & LYNEA MONITOR

DRAWING No: B-1T1Y1UK