



## Features

- Simple and intuitive audio receiver.
- Ultra-thin design (33mm).
- Made of high-quality ABS plastic.

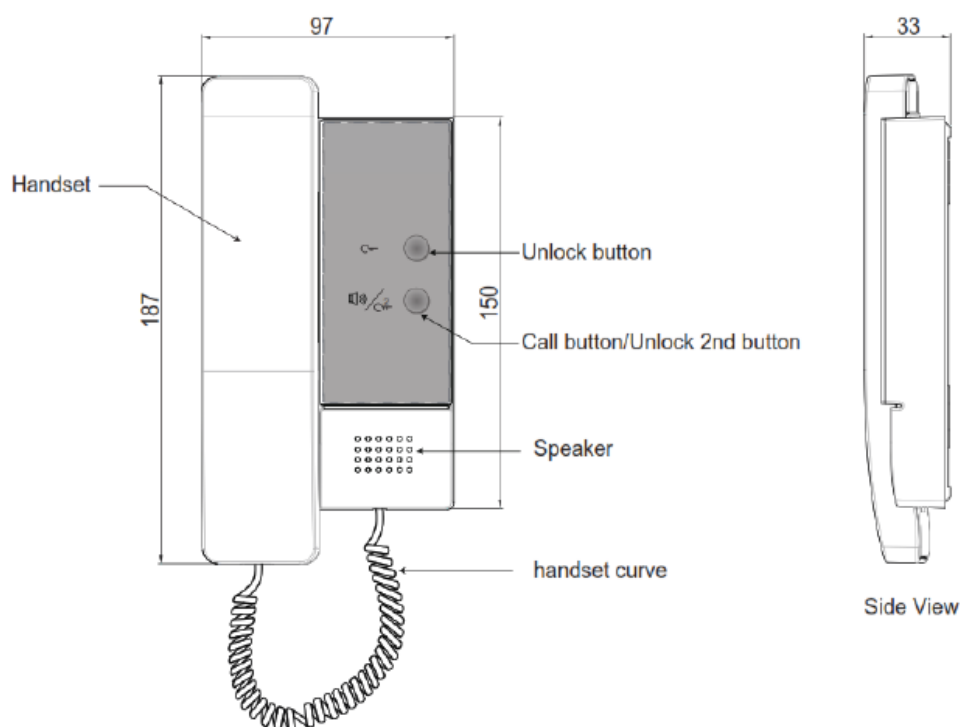



Bit-6 line terminal setting:

Bit state	Setting	Bit state	Setting
	Monitor not at the end of the line.		Monitor at the end of the line.

## Parts & Functions

- SW+ / SW-: Extra doorbell call button connection port.
- POW / GND: 12~16V extra power connection port.
- DIP1 Switches 1-6: Used to program the monitor address.
- DIP2 Switches 1-3: Used to set the handset as secondary or extended.
- K3: Used to set the volume setting.
- K4: Used to set the ringtone
- L1 / L2: BUS line terminal.

## Specification

- Input Voltage: 24V DC
- Power Consumption: Standby 2.1mA – Working 75.9mA
- Wiring: 2-wires non polarised
- Dimension: 187\*97\*33mm (H\*W\*D)
- Volume: 3 levels
- Ringtones: 12 different ringtones