


NOTE:
THIS DRAWING INDICATES AND ASSUMES THE USE OF
A MINIMUM OF 0.5MM CSA PER CORE.

4 CORES @ 0.5MMSQ (FOR 100M)

YC/200UK

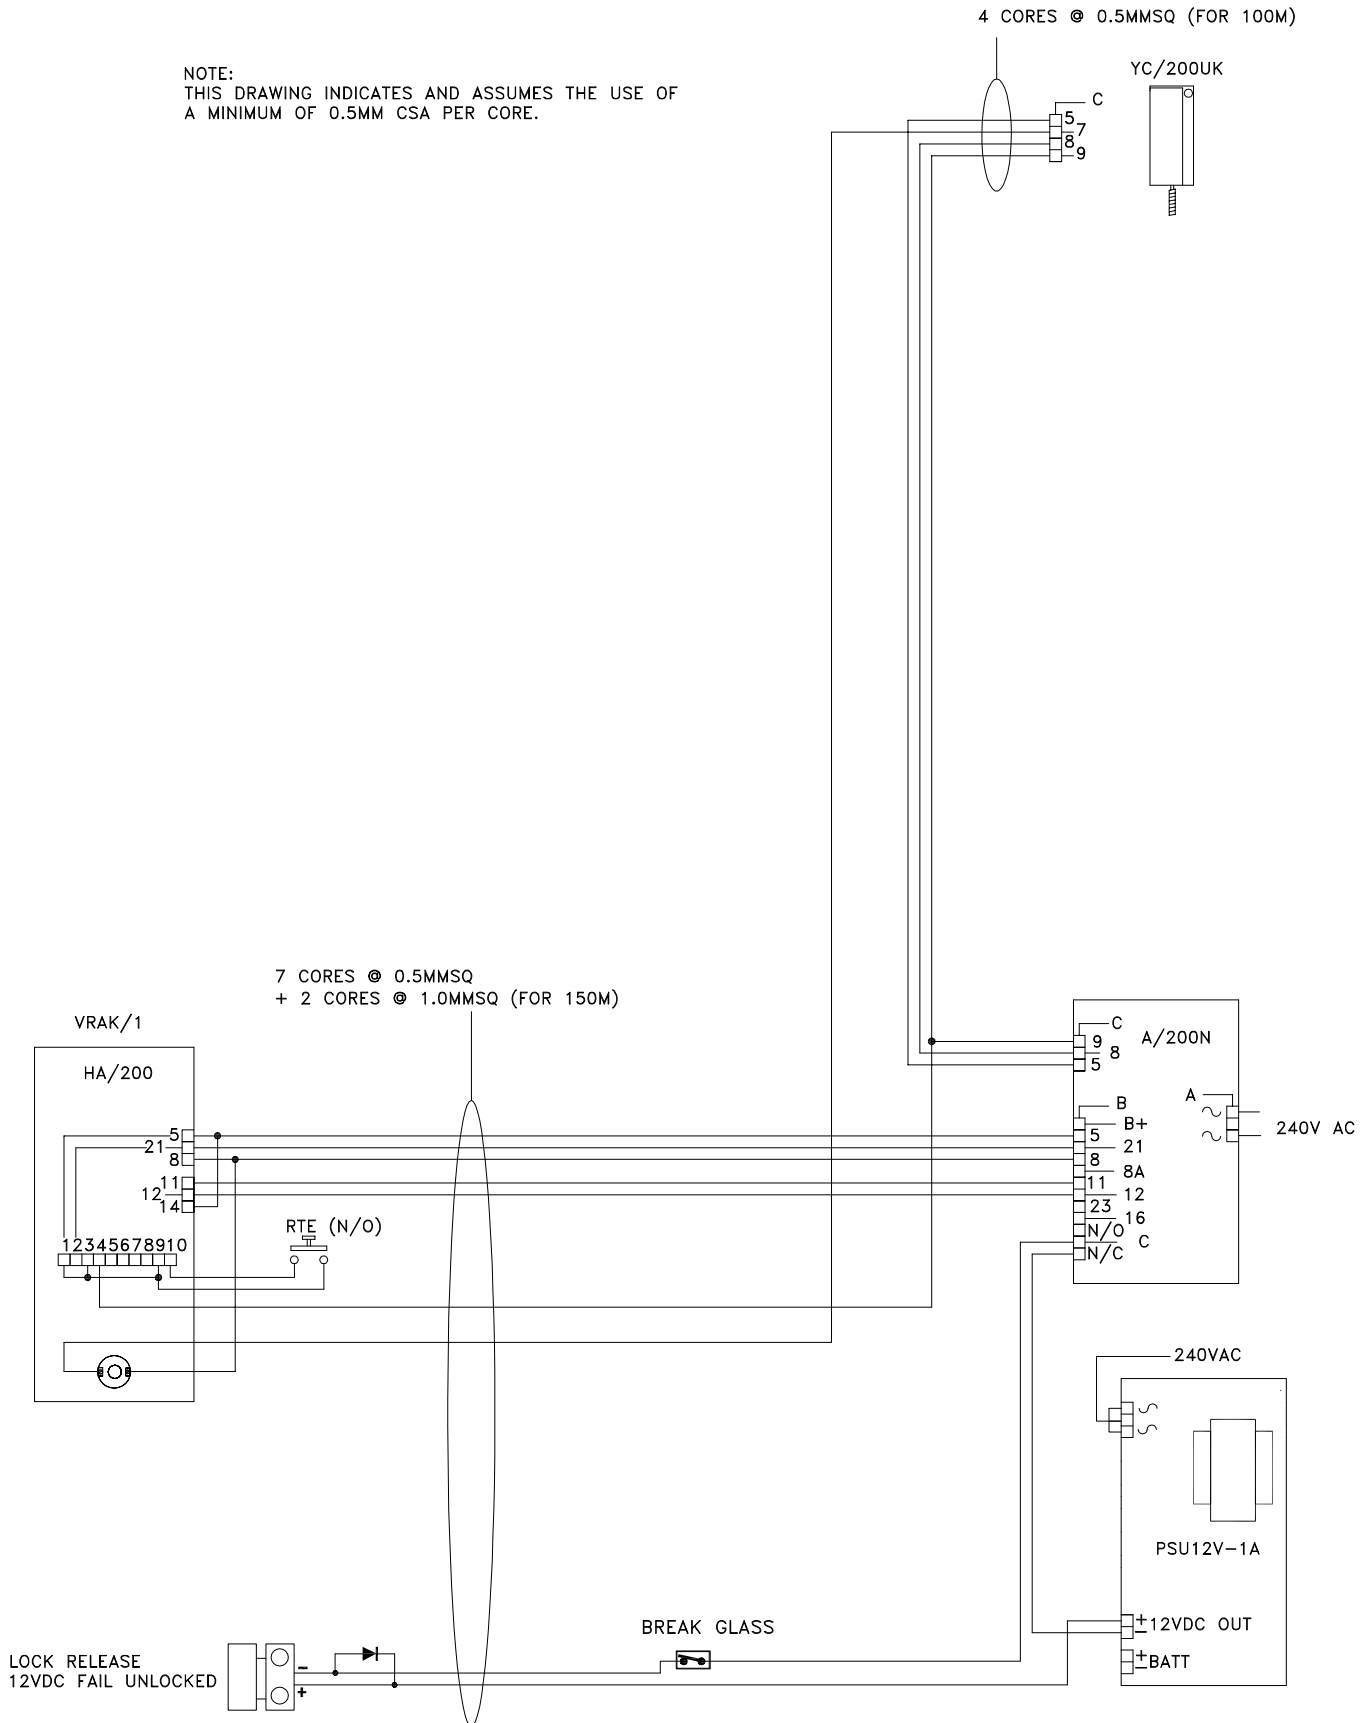

IT IS VERY IMPORTANT THAT A SUPPRESSION DEVICE BE FITTED
DIRECTLY ACROSS THE DC RELEASE SUPPLY LINES. IF THE
RELEASE IS NOT INTERNALLY SUPPRESSED USE A 1N4003

BPT (UK) LTD. HERTS. ENGLAND	PREPARED FOR INSTALLER INFORMATION	DATE: 13/08/03	DRAWN:RC
		REVISED:	
DRAWING TITLE:	1 X 1 BUTTON VR AUDIO ENTRY PANEL WITH KEYPAD, MAGLOCK & 1 LYNEA HANDSET	DRAWING No: E-1V1Y1UK	