


NOTE:
THIS DRAWING INDICATES AND ASSUMES THE USE OF
A MINIMUM OF 0.5MM CSA PER CORE.

CALL LINES TO FURTHER
HANDSETS

TO FURTHER HANDSETS

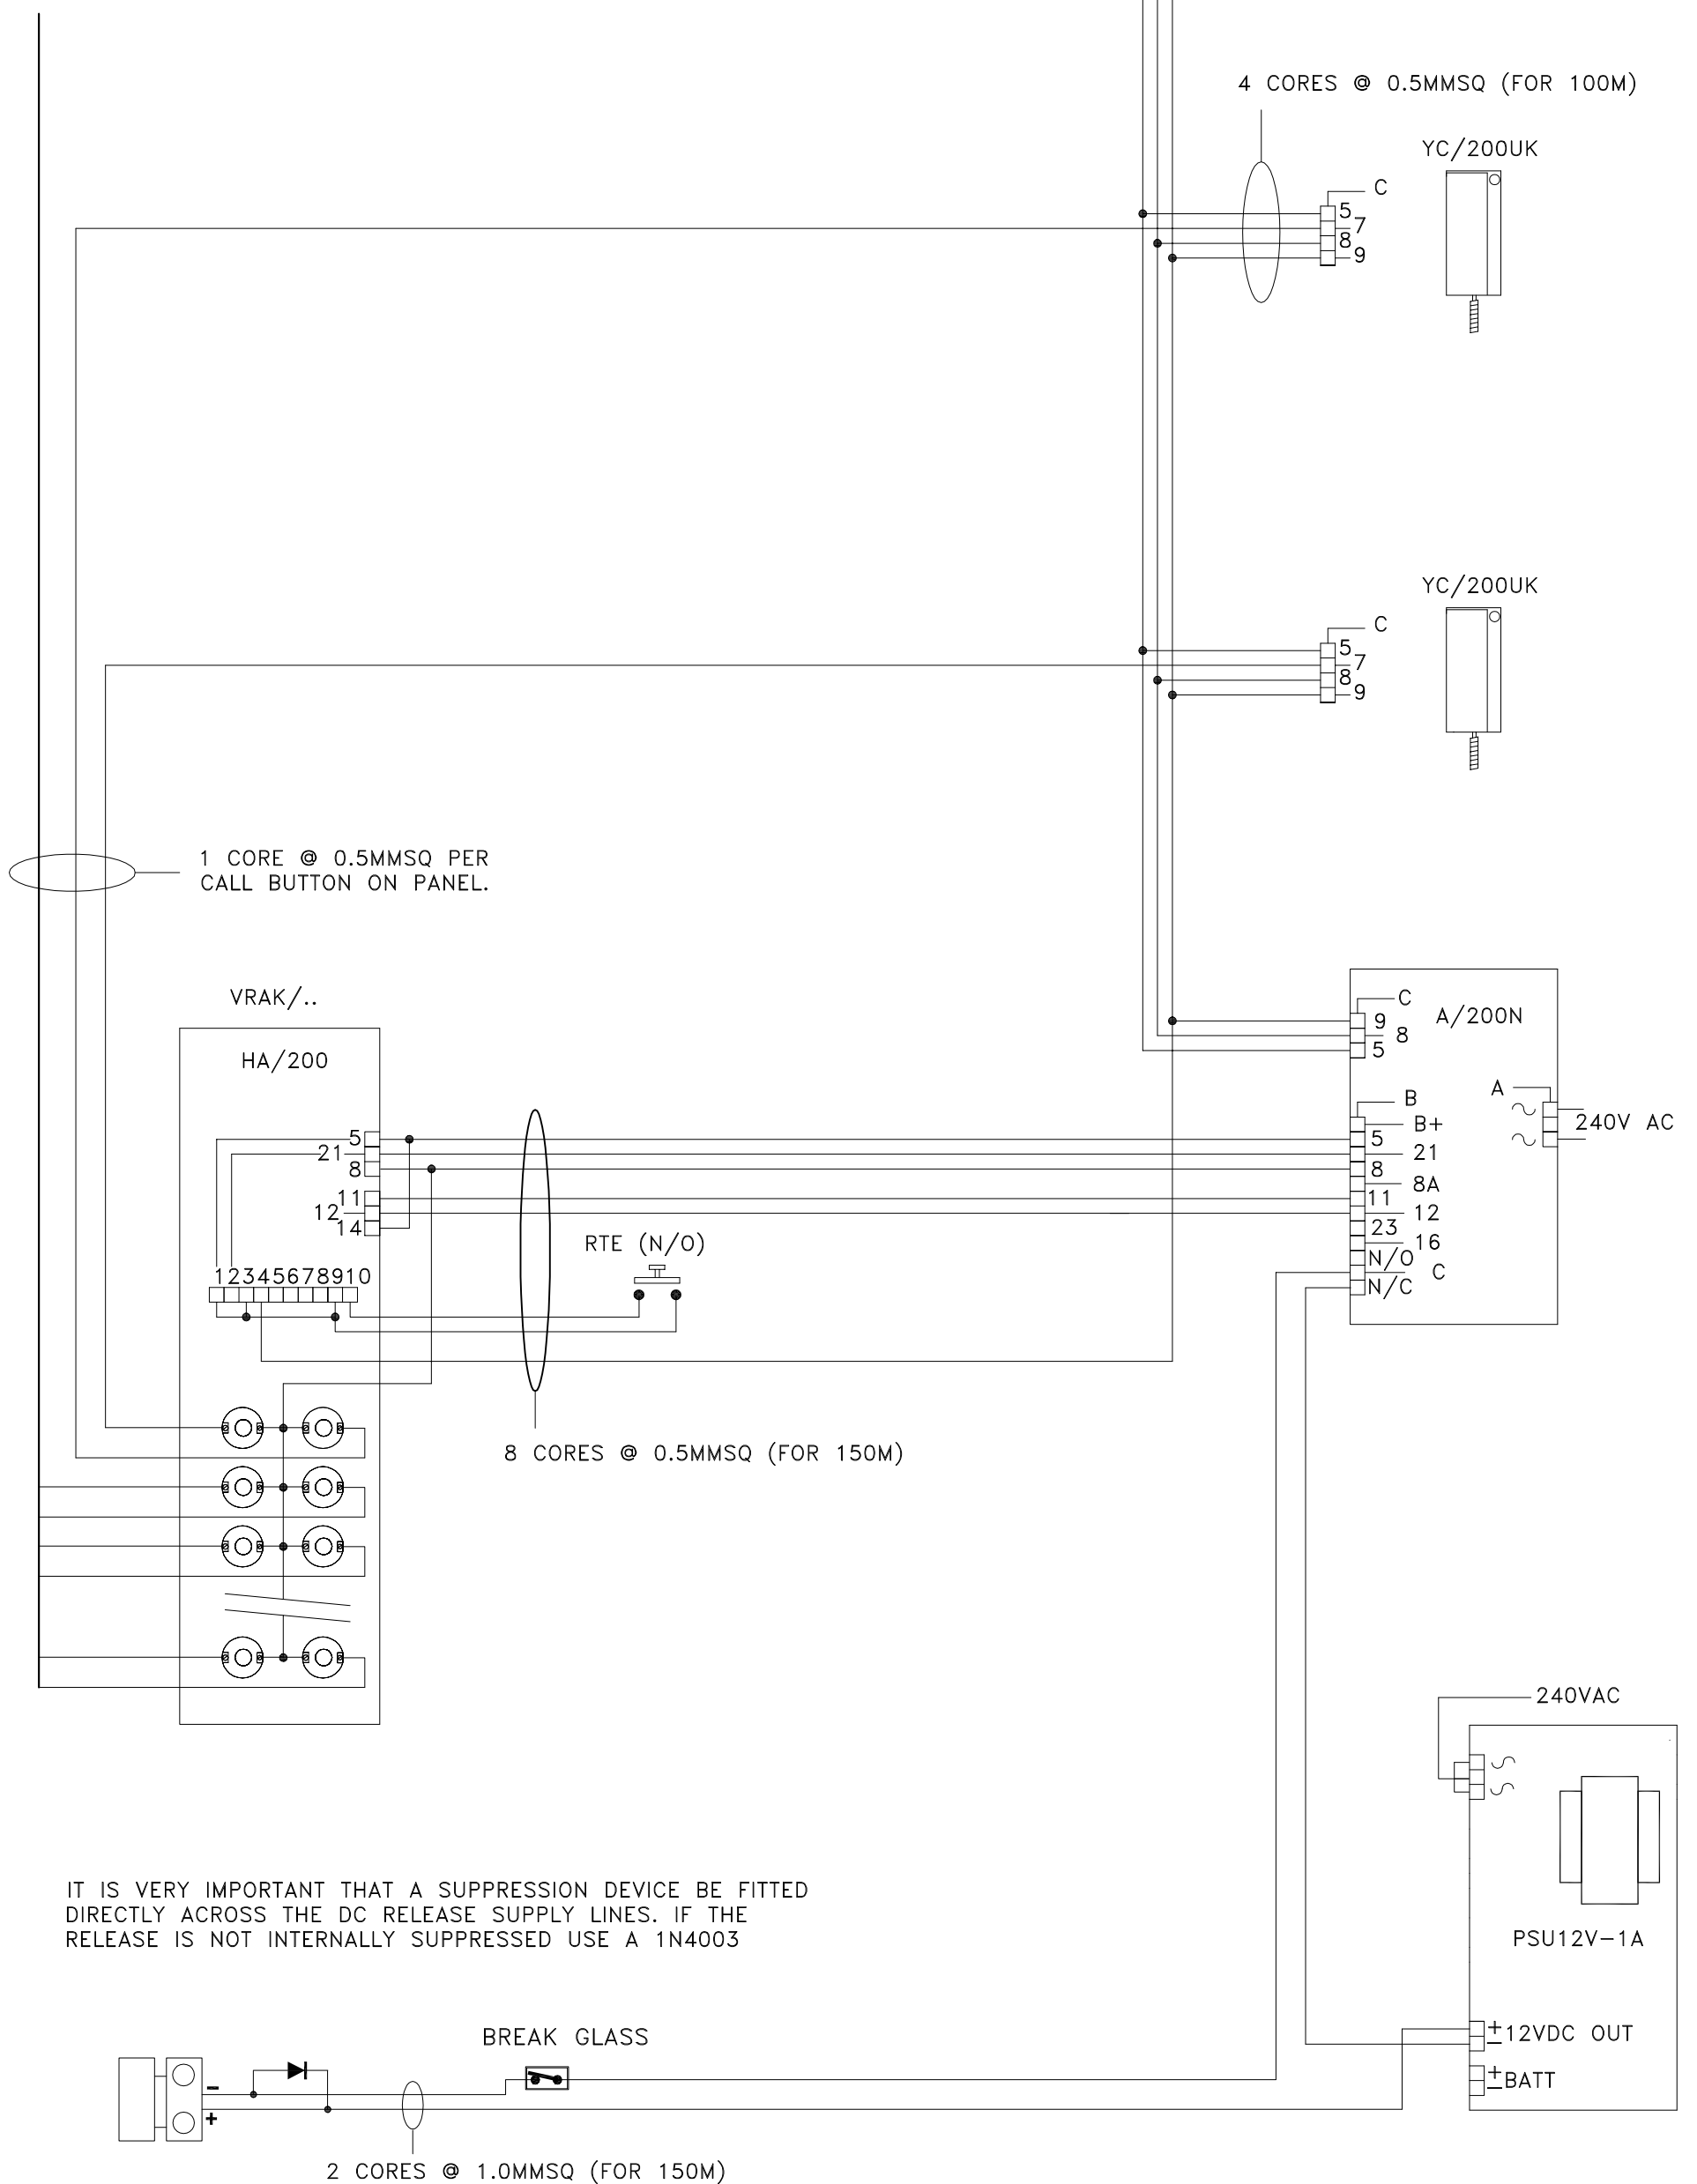

IT IS VERY IMPORTANT THAT A SUPPRESSION DEVICE BE FITTED
DIRECTLY ACROSS THE DC RELEASE SUPPLY LINES. IF THE
RELEASE IS NOT INTERNALLY SUPPRESSED USE A 1N4003

BPT (UK) LTD.
HERTS. ENGLAND

PREPARED FOR
INSTALLER INFORMATION

DATE: 23/06/04

DRAWN:RC

REVISED:

DRAWING TITLE:

MULTI-FLAT INSTALLATION USING 1 VR
AUDIO ENTRY PANEL WITH MAGLOCK & KEYPAD

DRAWING No: E-NV1YNUK