NOTE:
THIS DRAWING INDICATES AND ASSUMES THE USE OF BPT COMPOSITE CABLES OR A SUITABLE EQUIVALENT.

ENSURE ALL ADDITIONAL CONNECTIONS ARE A MINIMUM OF 0.5MM CSA PER CORE.

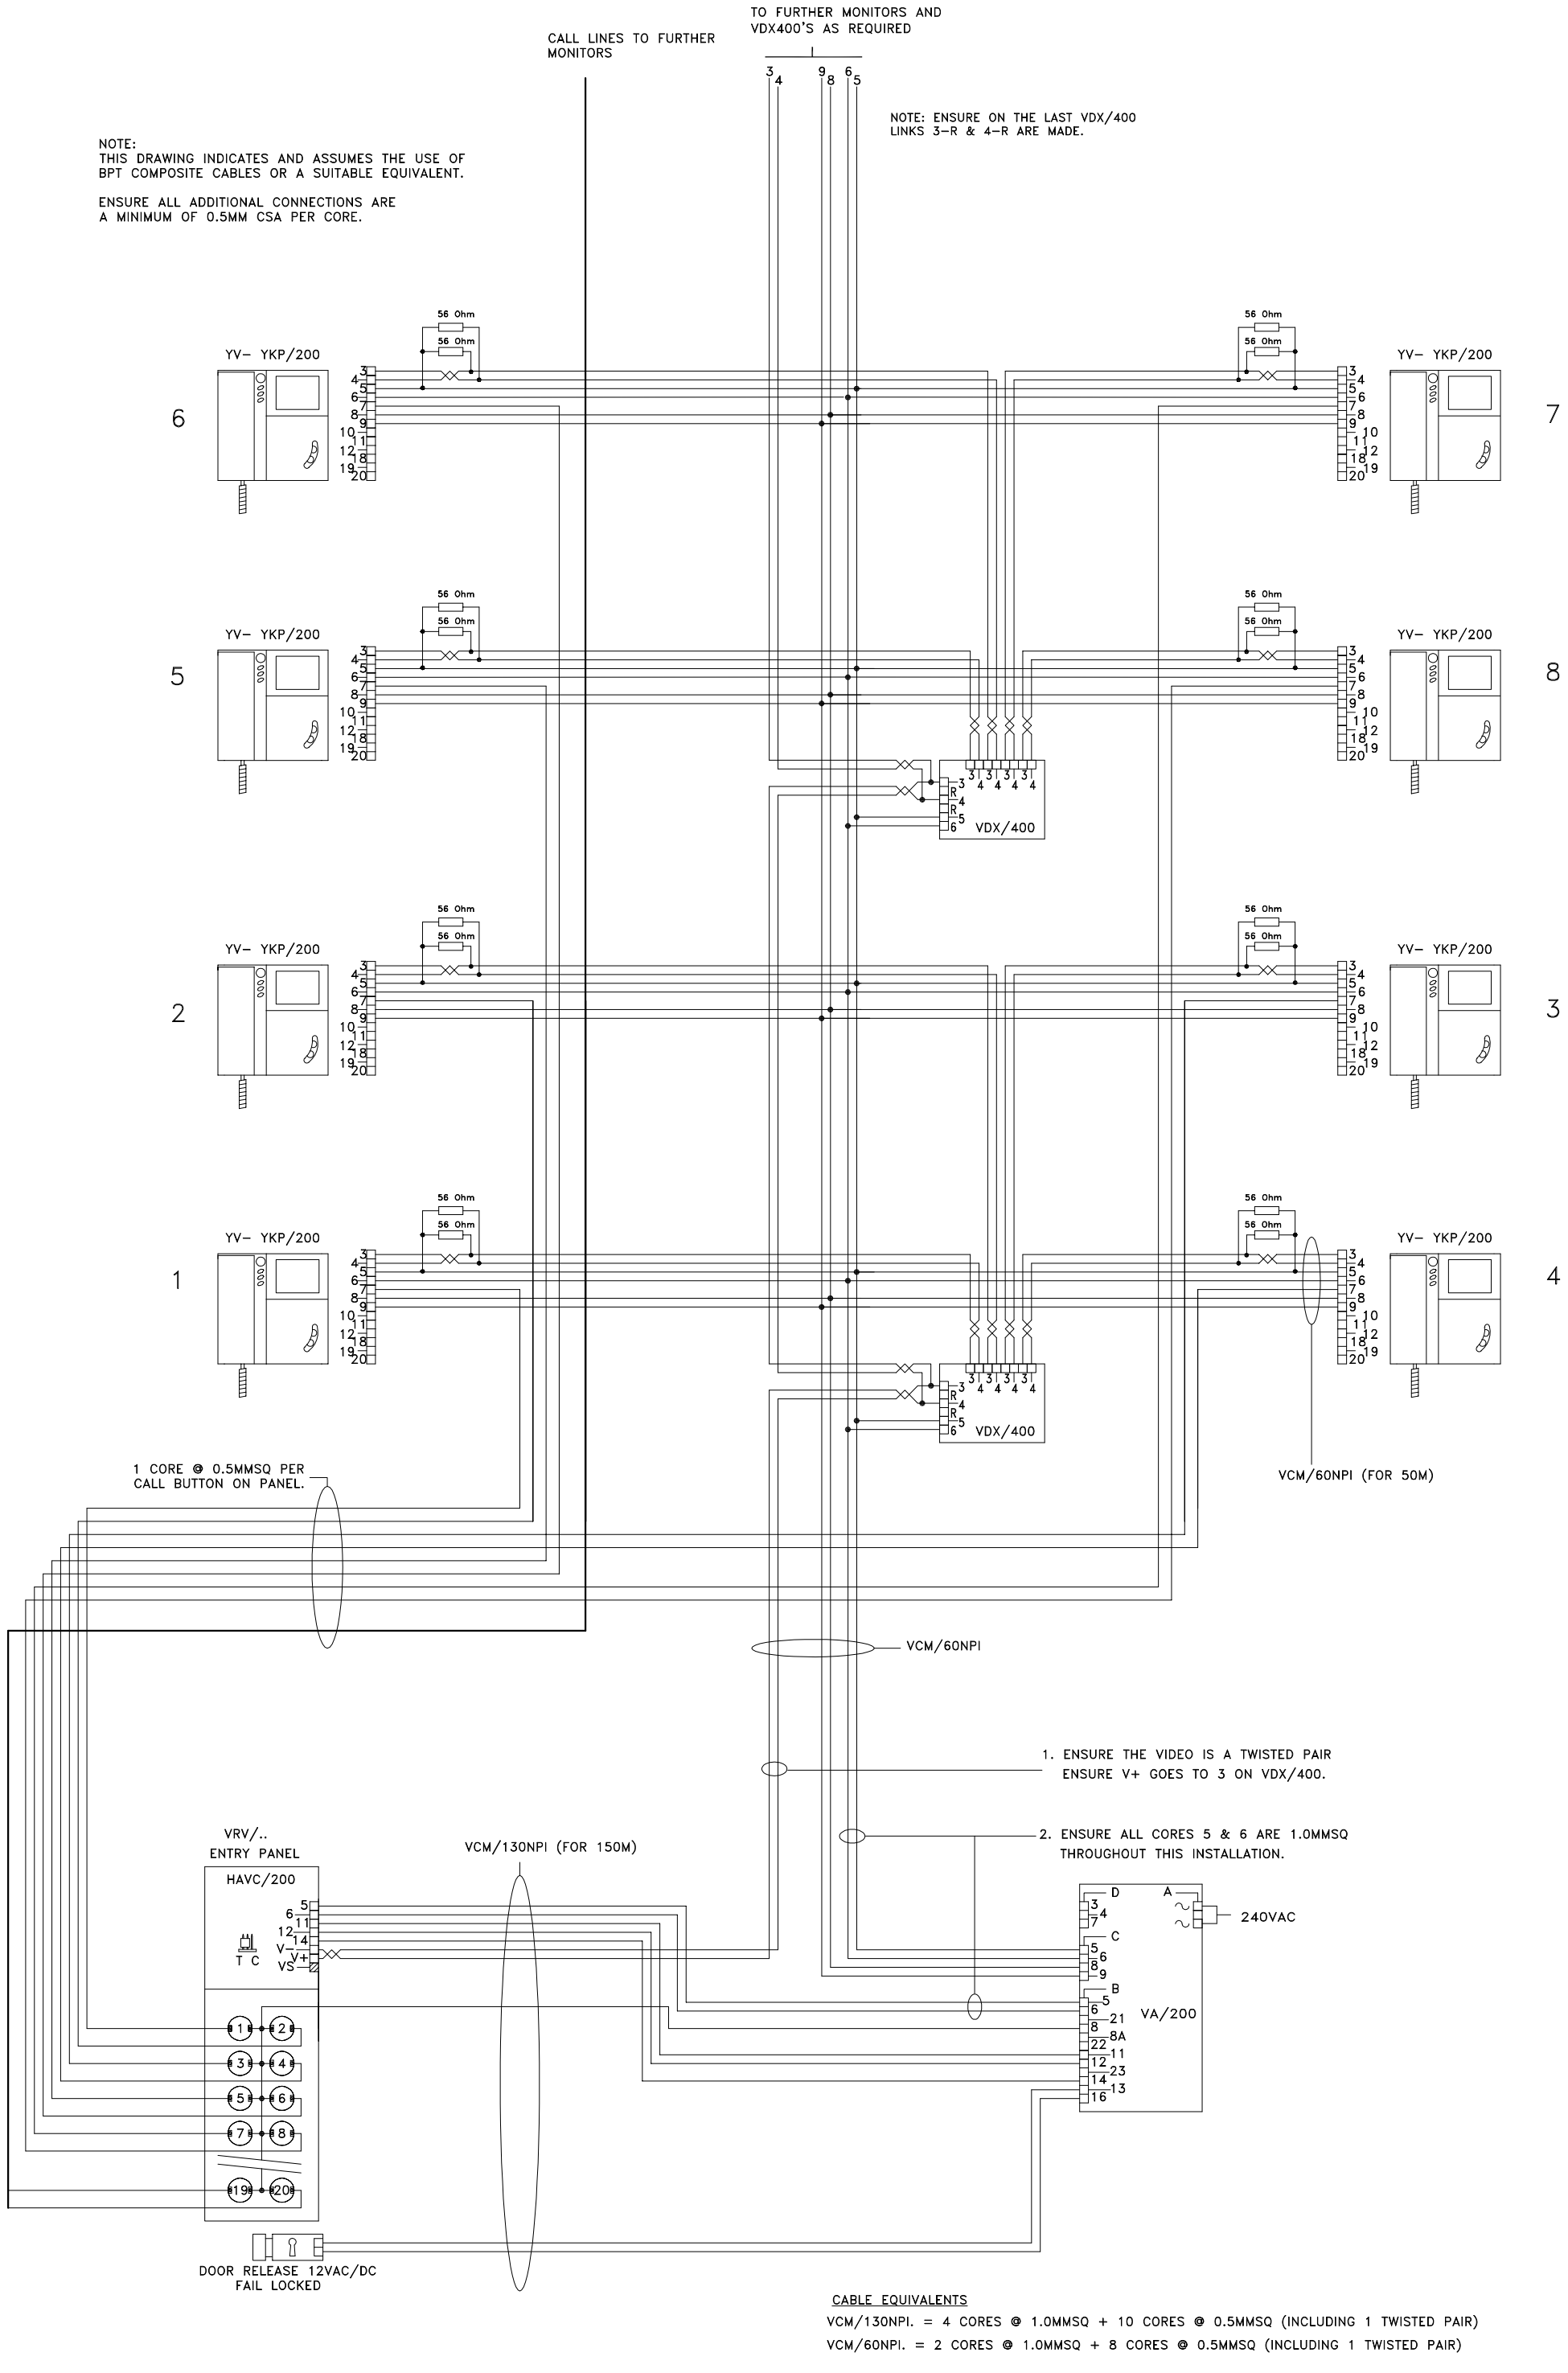

CABLE EQUIVALENTS

VCM/130NPI. = 4 CORES @ 1.0MMSQ + 10 CORES @ 0.5MMSQ (INCLUDING 1 TWISTED PAIR)

VCM/60NPI. = 2 CORES @ 1.0MMSQ + 8 CORES @ 0.5MMSQ (INCLUDING 1 TWISTED PAIR)

BPT (UK) LTD. HERTS. ENGLAND	PREPARED FOR INSTALLER INFORMATION	DATE: 02/02/06	DRAWN: RC
		REVISED:	
DRAWING TITLE:	1 X MULTI–BUTTON VR OR BRASS VIDEO ENTRY PANEL CALLING LYNEA MONITORS USING A TWISTED PAIR FOR VIDEO DISTRIBUTION	DRAWING No: B–NV1YNL(TP)	