


NOTE: CABLE EQUIVALENTS

VCM/130 = RG59 COAX + 4 CORES @ 1.0MMSQ + 8 CORES @ 0.5MMSQ

VCM/60 = RG59 COAX + 2 CORES @ 1.0MMSQ + 3 CORES @ 0.5MMSQ

TO FURTHER MONITORS AND VAV400P'S AS REQUIRED

75 Ohm ENSURE LAST VAV/400P IN/OUT BLOCK HAS A 75 Ohm RESISTOR FITTED ACROSS TERMINALS 3 & 4.

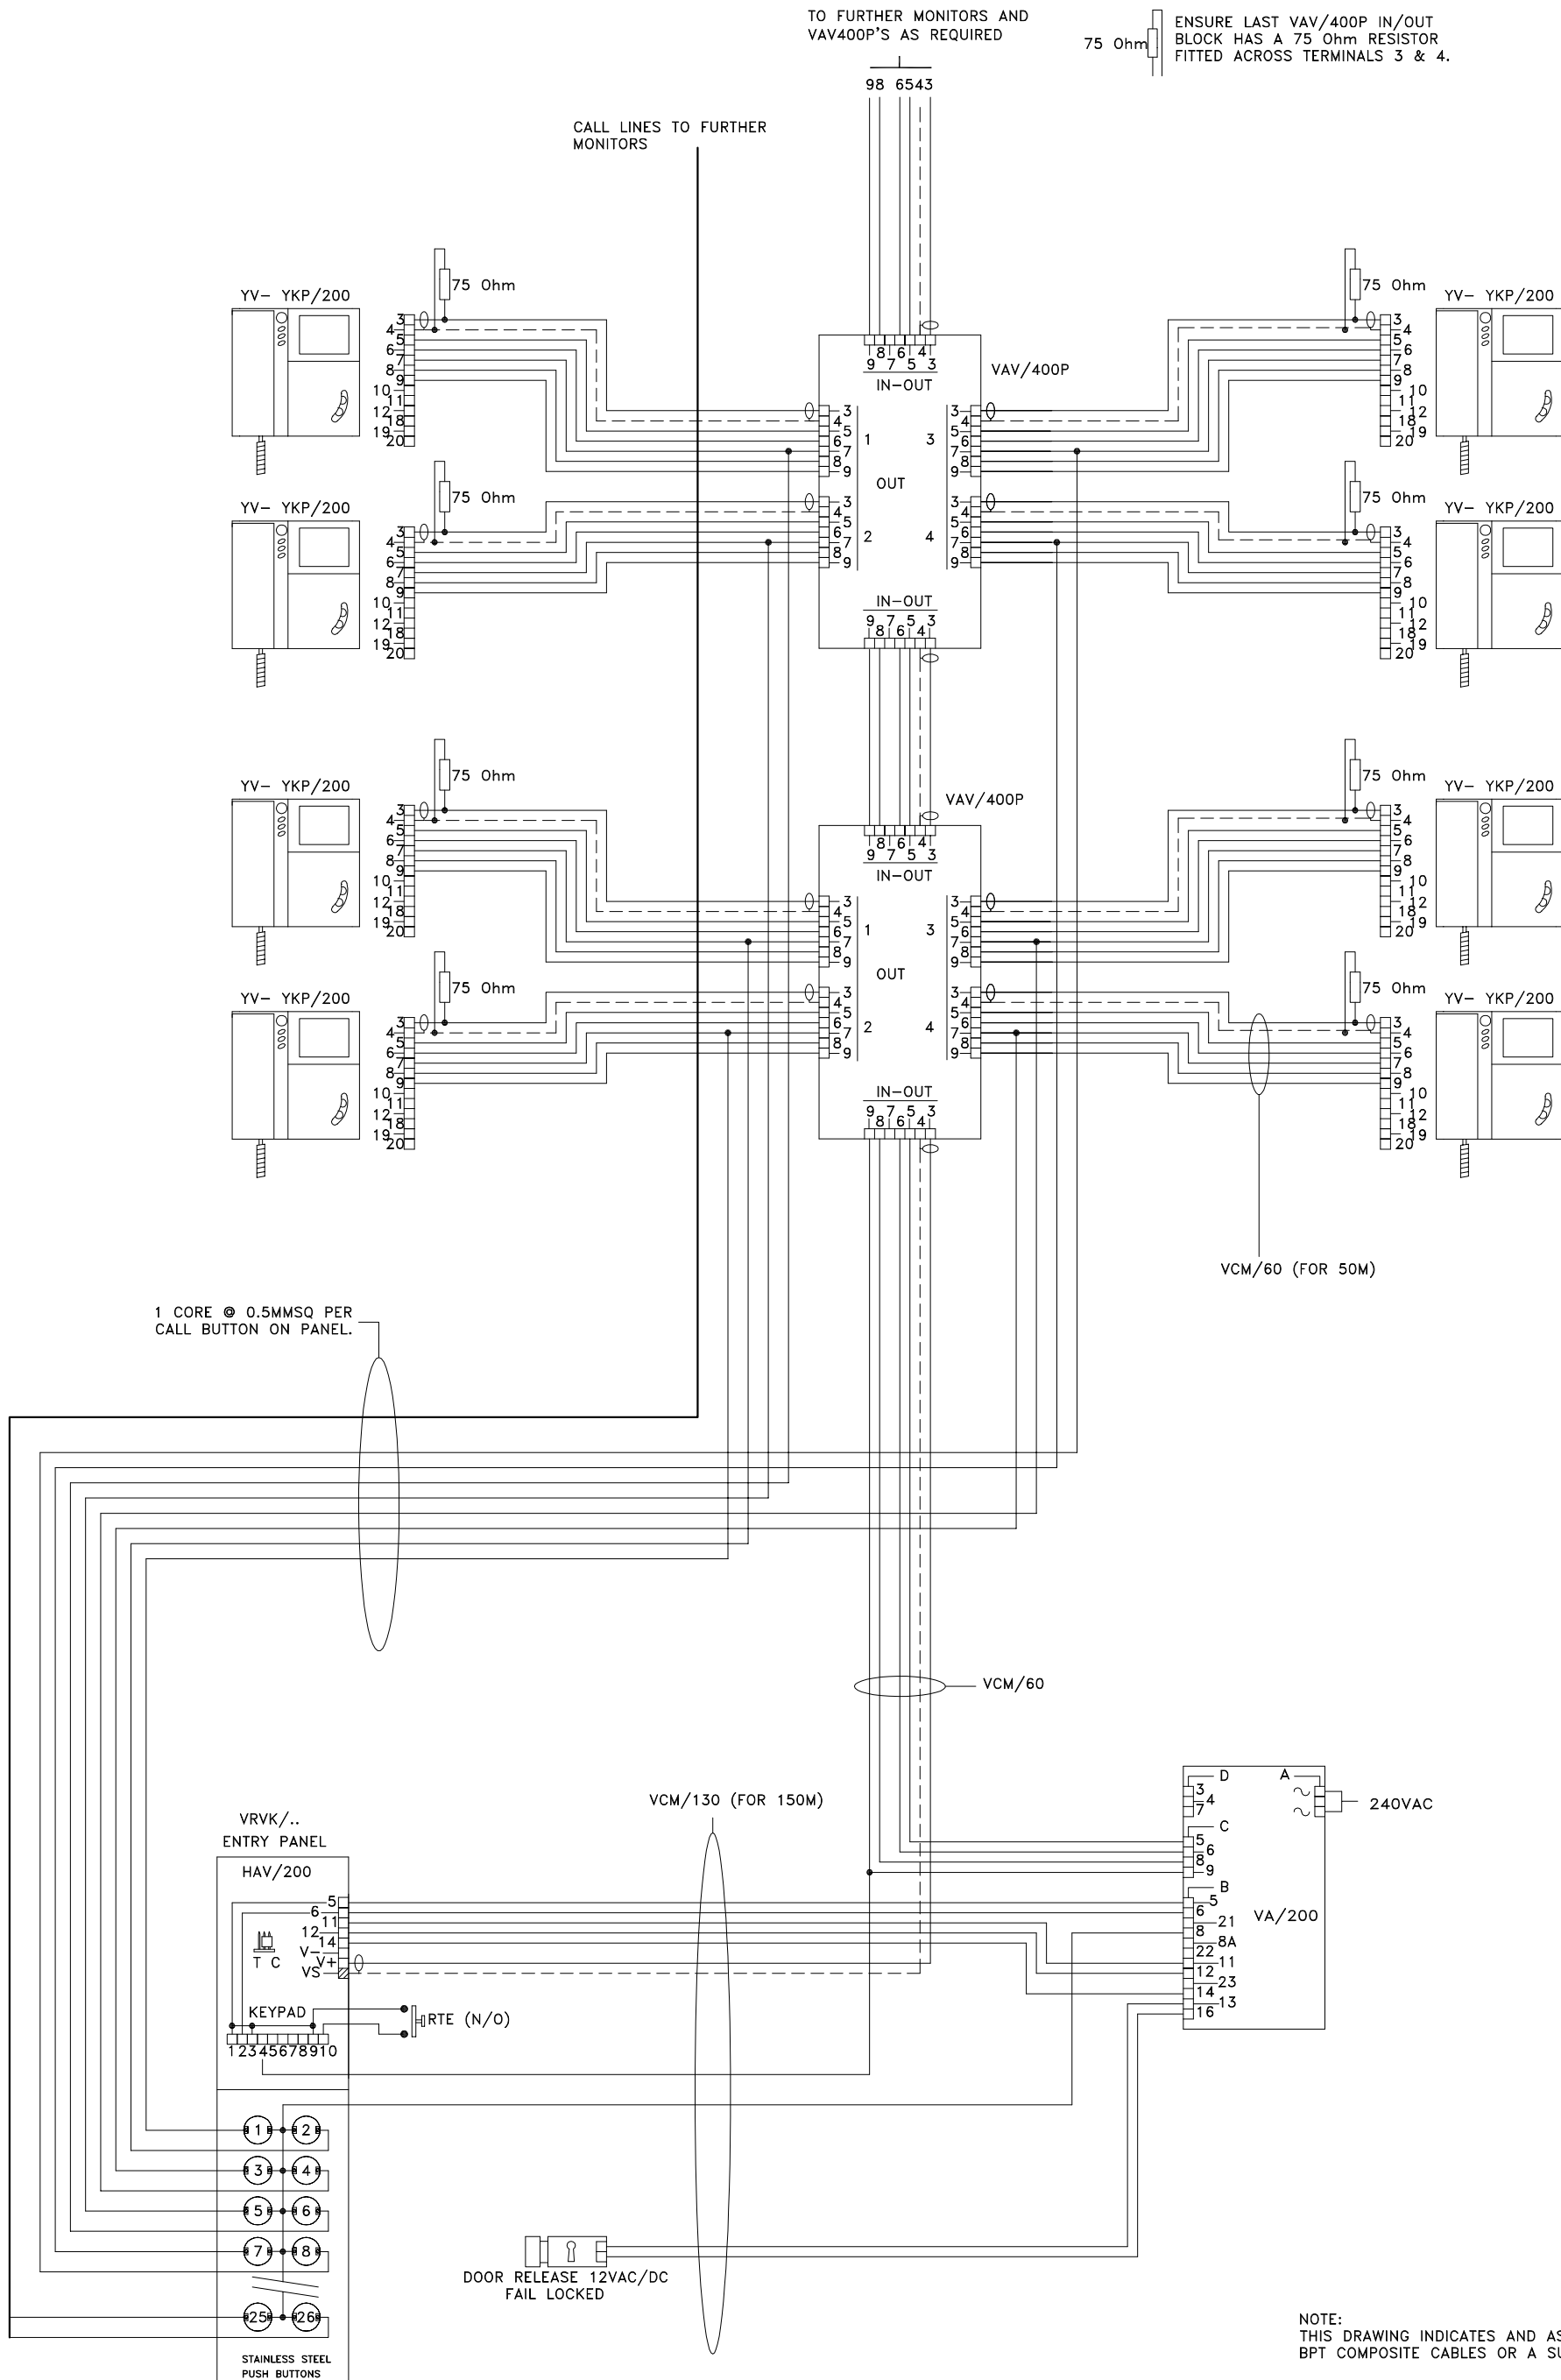

NOTE: THIS DRAWING INDICATES AND ASSUMES THE USE OF BPT COMPOSITE CABLES OR A SUITABLE EQUIVALENT. ENSURE ALL ADDITIONAL CONNECTIONS ARE A MINIMUM OF 0.5MM CSA PER CORE.

BPT (UK) LTD. HERTS. ENGLAND

PREPARED FOR INSTALLER INFORMATION

DATE: 30/03/04 DRAWN: RC

REVISED:

DRAWING TITLE:

MULTI-FLAT INSTALLATION USING 1 VR VIDEO PANEL WITH KEYPAD AND LYNEA MONITORS.

DRAWING No: B-NV1YNLK