


Cable requirements :

Make connections as per diagram in order to avoid interference.

Wire Ref	Function	Distance (m)	50	100	200	300
1	Loudspeaker		0.3	0.5	0.8	1.6
2	Microphone		0.3	0.5	0.8	1.6
6	Common -ve		0.5	0.8	1.0	1.6
9	Lock release		0.3	0.5	0.8	1.6
11	Call buzzer		0.3	0.5	0.8	1.6

Cross sectional area of conductors mm²

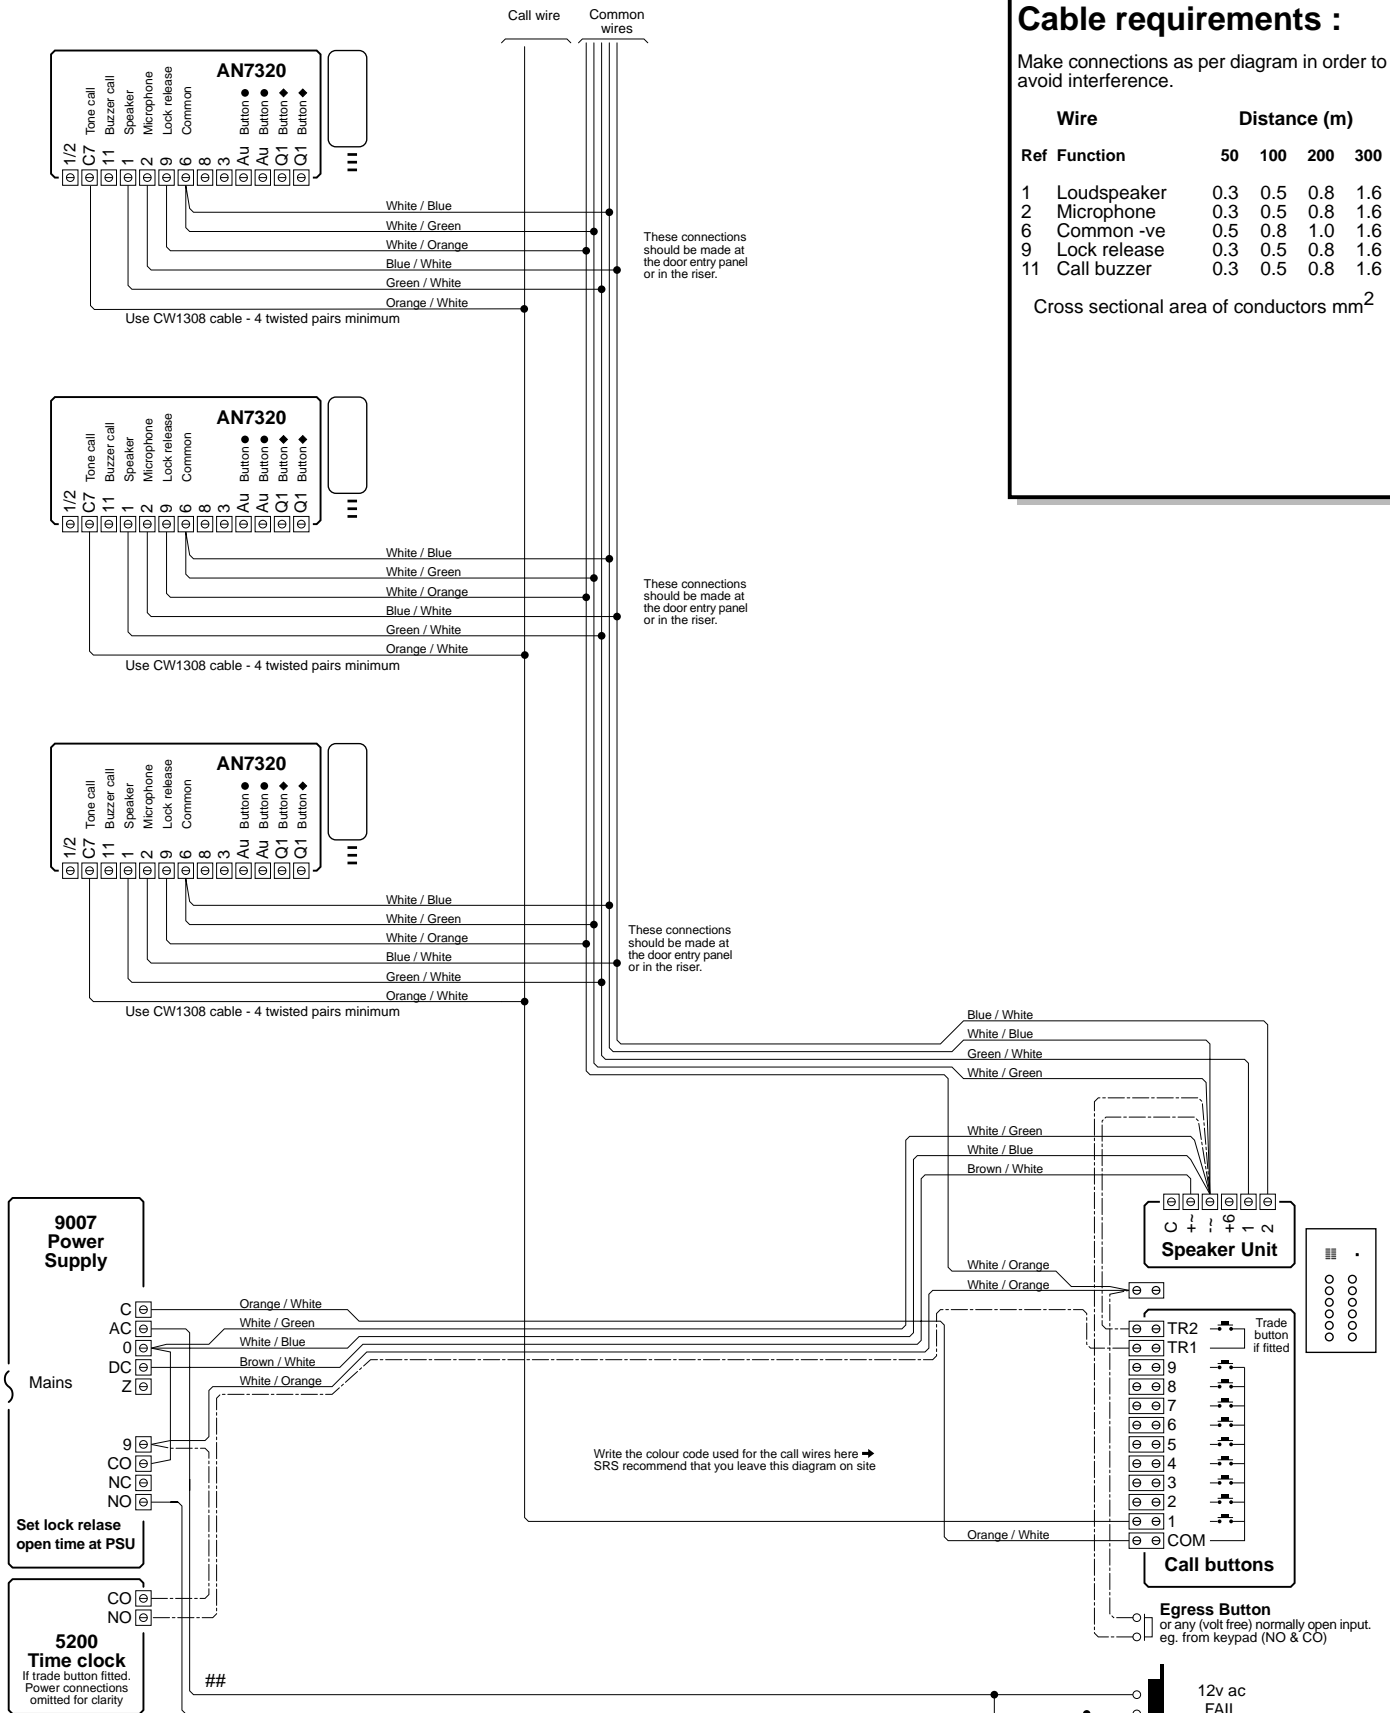

Locking Device Options

For ALL 12v dc locks connect wire ## between "lock" & DC.

For FAIL LOCKED use NO
For FAIL UNLOCKED use NC

12v dc FAIL UNLOCKED	12v dc FAIL LOCKED
9007 DC — o —	9007 DC — o —
9007 NC — o —	9007 NO — o —

ALWAYS FIT THE LOCK SUPPRESSOR (supplied with 9007)

12v ac
FAIL
LOCKED



