




1210

SIMPLEBUS2 POWER SUPPLY UNIT

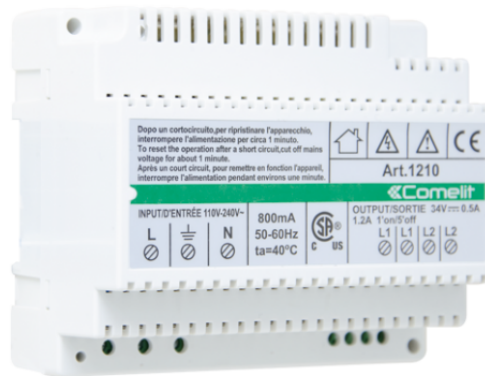

2-wire power supply unit required to power the external unit (terminals L1 - L1) and the support column (terminals L2 - L2). Equipped with 1 terminal for line termination art 1216. Input voltage 110-240Vac. Compatible with audio/video unit art. 4681 and 1621VC and audio unit art. 1621. Dimensions: 106x89x62mm (6 DIN modules).



1210

SIMPLEBUS2 POWER SUPPLY UNIT

MAIN FEATURES

Supply voltage	110÷240 VAC
Max. current delivered (A)	1.2
Applicable to DIN rail	Yes
Number of DIN modules (n°)	6

GENERAL DATA

Height (mm)	108
Width (mm)	90
Depth (mm)	62
Operating temperature (°C)	-10 ÷ 40

COMPATIBILITY

Building Kit audio/video system	Yes
Simplebus 2 audio system	Yes

AUDIO/VIDEO FEATURES

Audio/video system	Yes
--------------------	-----

ELECTRICAL SPECIFICATIONS

Maximum current absorption (mA)	800
Maximum power delivered (W)	40