


TO FURTHER MONITORS AND VAV400P'S AS REQUIRED

75 Ohm

ENSURE LAST VAV/400P IN/OUT BLOCK HAS A 75 Ohm RESISTOR FITTED ACROSS TERMINALS 3 & 4.

CALL LINES TO FURTHER MONITORS

98 6543

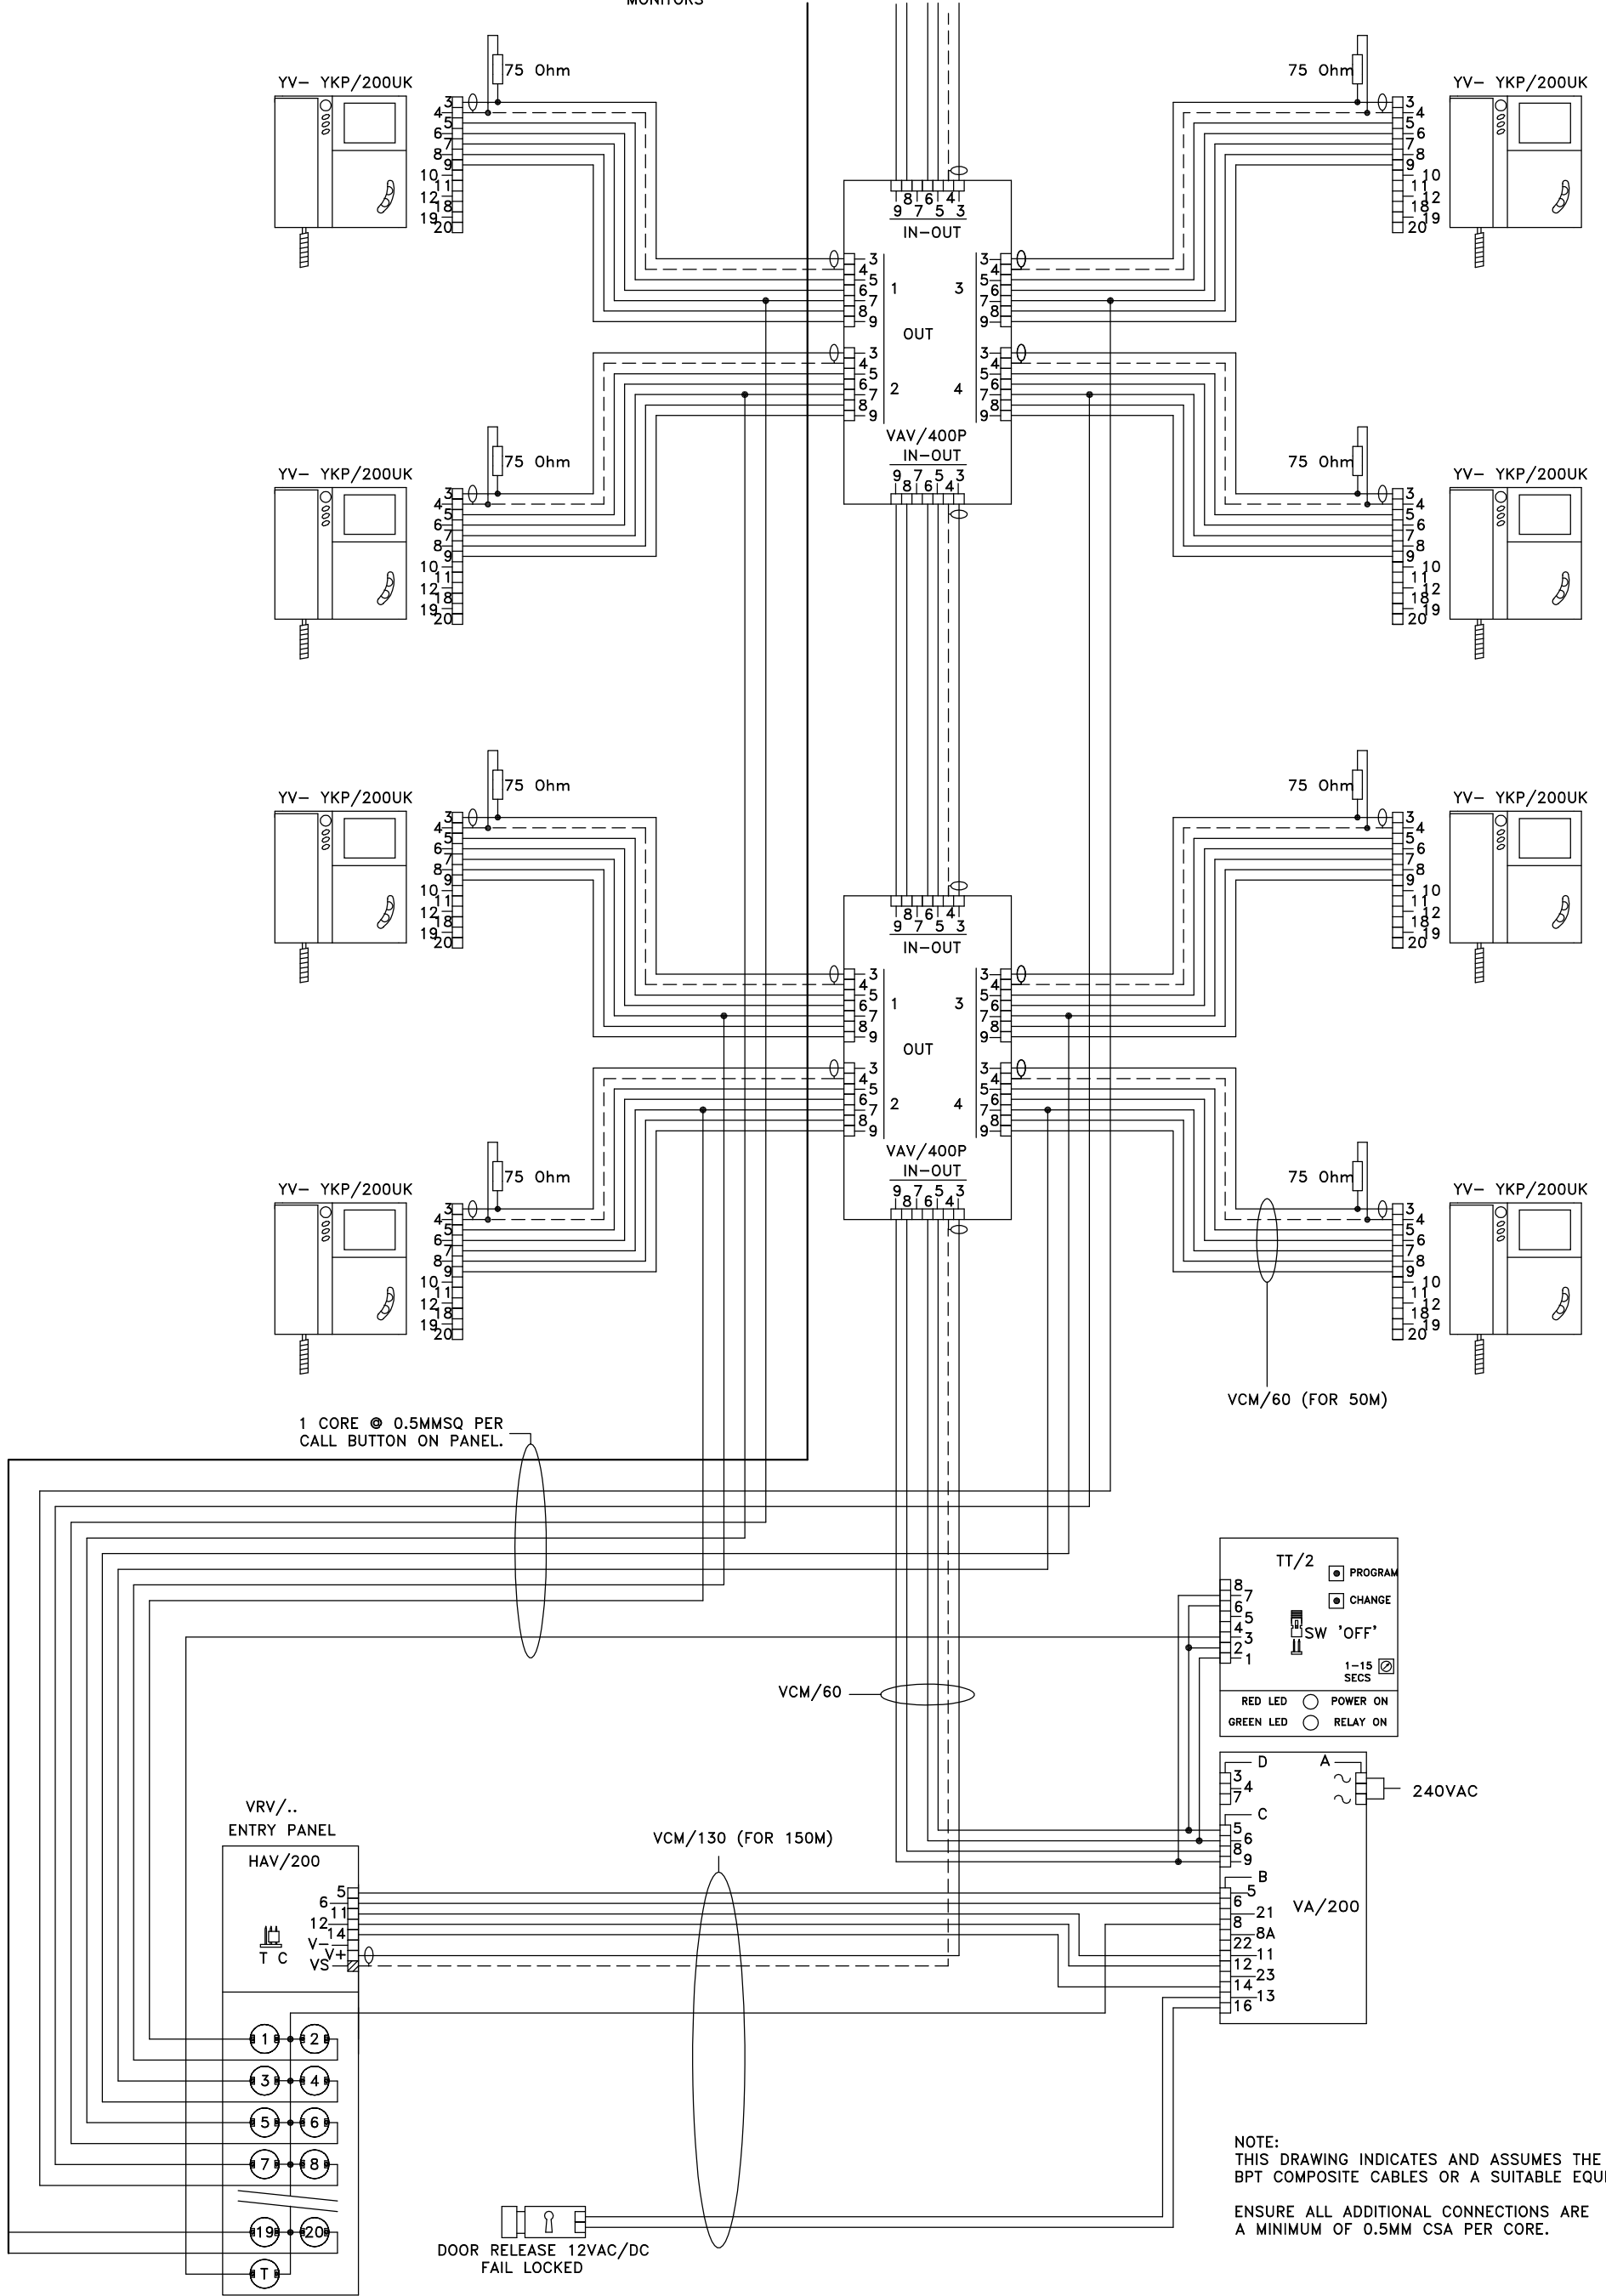

1 CORE @ 0.5MMSQ PER CALL BUTTON ON PANEL.

VCM/60 (FOR 50M)

VCM/60

VCM/130 (FOR 150M)

NOTE: THIS DRAWING INDICATES AND ASSUMES THE USE OF BPT COMPOSITE CABLES OR A SUITABLE EQUIVALENT.

ENSURE ALL ADDITIONAL CONNECTIONS ARE A MINIMUM OF 0.5MM CSA PER CORE.

NOTE: CABLE EQUIVALENTS

VCM/130 = RG59 COAX + 4 CORES @ 1.0MMSQ + 8 CORES @ 0.5MMSQ

VCM/60 = RG59 COAX + 2 CORES @ 1.0MMSQ + 3 CORES @ 0.5MMSQ

BPT (UK) LTD.
HERTS. ENGLAND

PREPARED FOR
INSTALLER INFORMATION

DATE: 30/06/04

DRAWN: RC

REVISED:

DRAWING TITLE:

MULTI-FLAT INSTALLATION USING 1 VR VIDEO
ENTRY PANEL WITH TRADES & LYNEA MONITORS

DRAWING No: B-NV1YNLTT(A)