



PRODUCT FEATURES

- Transfers power wirelessly across door gaps of up to 3/16"
- Flexible mounting: can be installed on hinge side, latch side or top of frame
- Dual Voltage output 12VDC or 24VDC field selectable
- Continuous or intermittent duty
- For fail secure devices
- Use with electrified locks, latches or other door hardware requiring up to 6 watts (0.5A @12VDC) of power
- Adhesive backed templates for accurate installation
- MagnaCare Lifetime Replacement No Fault Warranty

SPECIFICATIONS

- UL10C Listed
- ANSI/SDI-BHMA A250.13 (+/- 150 psi) Windstorm Listed
- Patents: #8,294,302
- Patents Pending


Endurance:
2,000,000 cycles

Operating Temperature:
-40 to +120F [-40 to +49C]

Electrical:
Input
24VDC only 500mA max

Output
500mA @ 12VDC
250mA @ 24VDC

Dimensions:
Send Unit (Frame Side)
2-3/4"H x 1-1/4"W x 1-3/8"D
Receive Unit (Door Side)
2-3/4"H x 1-1/4"W x 1-5/8"D

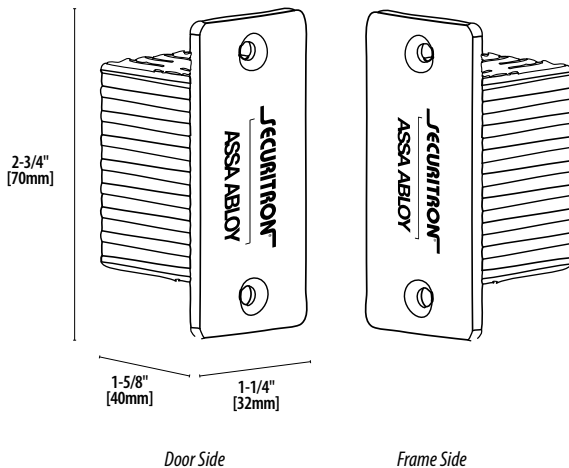

POWERJUMP™ ICPT

Inductive Coupling Power Transfer

No Moving Parts, No More Broken Wires, No Need to Core Drill the Door

The Securiton PowerJump ICPT ports power contactlessly and invisibly across the door gap to run electrified hardware on the door. With flexible installation placement on the latch side, hinge side or top of the door, it transfers power without pins or wires, eliminating points of vulnerability and wear . . . and no need to core drill the door!

» MODELS

PART # | Description

ICPT | PowerJump Inductive Coupling Power Transfer



Watch how this new power transfer works



SECURITRON™
ASSA ABLOY