




<b>Product Image</b>		
<b>Part Number</b>	909020053 – PAC 520 Input Controller - DIN Mount	909020051 – Boxed PAC 520 Input Controller
<b>Dimensions</b>	W 180 x H 125 x D 40mm	W 150 x H 220 x D 40mm
<b>Operating Temperature</b>	-10°C to +55°C	
<b>Operating Humidity</b>	0% to 85% Relative Humidity	
<b>Controller Inputs</b>	20 configurable inputs: <ul style="list-style-type: none"> <li>• Normally Open, Normally Closed and 2, 3 or 4 state</li> <li>• 5Amp Relays @ 30 V DC</li> </ul>	
<b>Controller Outputs</b>	2 configurable outputs: <ul style="list-style-type: none"> <li>• Latched, Momentary, Toggled and Pulsed</li> <li>• 5Amp Relays @ 30 V DC</li> </ul>	
<b>Additional Connections</b>	1 x tamper alarm input 1 x override input 1 x RS-485 input	
<b>Auxiliary power outputs</b>	2 x Polyfused 200mAmp Auxiliary voltage output	
<b>Configuration</b>	via PC with PAC Access Central software	
<b>Connection to PAC 512</b>	RS-485	
<b>Maximum Distance to PAC512</b>	1000m	
<b>Power input</b>	10.5 – 28 V DC 115mA @ 10.5 V DC 45mA @ 28 V DC	
<b>Warranty</b>	5 years against electronic failure	
<b>Standards Compliance</b>	CE, RoHS & WEEE compliant	

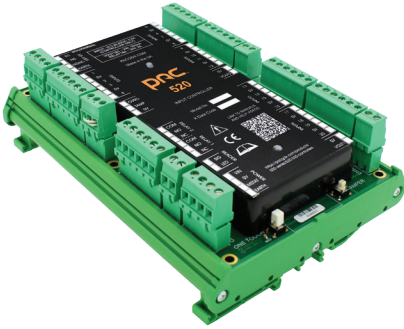

**Date of print/release: (September 2020)**

This document is provided by STANLEY Security or its affiliates ("STANLEY") for general information purposes only. STANLEY warrant the accuracy of the data as at the date of print/release, but it may be subject to change after such date. STANLEY will not be responsible for any loss or damage that may arise from reliance thereof. Copyright © STANLEY Security 2020. PAC, GDx and 3xLOGIC are the trade marks of STANLEY Security, Stanley Black & Decker, Inc., or their affiliates.

**Ordering Information:**

PAC Access Control, 1 Park Gate Close,  
 Bredbury, Stockport, Cheshire, SK6 2SZ  
 customerservices@pacgdx.com | +44 (0) 161 406 3400  
 www.pacgdx.com