




1602/V

SYSTEM B/W VIDEO ENTRY AUDIO UNIT SIMPLEBUS- POWERCOM

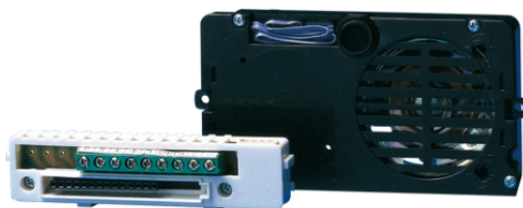

Module which allows modulation and transmission of the video signal on the riser. On input it has the composite video signal of a B/W camera. Power supply: 12V AC. Dimensions: 102x55x35 mm



1602/V

SYSTEM B/W VIDEO ENTRY AUDIO UNIT SIMPLEBUS-POWERCOM

| Height (mm) | 55 |
|---------------------------------------|----------|
| COMPATIBLE SYSTEMS | |
| Comelbus system | Yes |
| ENVIRONMENTAL AND COMPLIANCE FEATURES | |
| Operating temperature (°C) | -25 ÷ 55 |
| GENERAL FEATURES | |
| Maximum current absorption (mA) | 300 |
| Simplebus 2 audio system | Yes |



1602/V

SYSTEM B/W VIDEO ENTRY AUDIO UNIT SIMPLEBUS- POWERCOM



4660 POWERCOM SIMPLEBUS B/W CAMERA

Simplebus system audio-video unit with terminal board complete with camera pin-hole CCD 1/4' black and white adjustable from the front, and LED camera illumination. Complete with audio speaker unit with double amplifier, watertight loudspeaker and electret microphone. Both, microphone and loudspeaker volumes, can be adjusted from the front. To be inserted in modules arts. 3321/0, 3321/1 and 3321/2. Dimensions: 102x55x35 mm