

SPRINT handset (that can be fitted with accessories)

Description

2 WIRE handset that can be fitted with accessories, wall mounted or table top installation. It has auxiliary function pushbuttons.

It can be accessorised with additional pushbuttons and signalling LED (traditional wiring), as well as call exclusion card, 346800. Using the configuration procedure, the user can decide which function to associate to the auxiliary function pushbutton.

When the 344212 handset is installed on video or mixed audio/video systems as the last device of the riser, or apartment line, an INPUT/OUTPUT termination 3499 must be connected to the handset itself.


Related items

337242	Handset table-top base
346800	Extra bell and/or call exclusion card
336803	AMP cable for connection on table-top base
337430	Additional pushbutton
3499	Line termination

Technical data

Power supply from SCS BUS:	18 – 27 Vdc
Stand by absorption:	5 mA
Max. operating absorption:	35 mA
Operating temperature:	5 - 40°C

Dimensional data

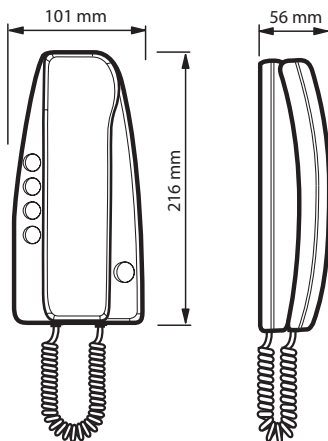


Configuration

The handset must be physically configured:

N - handset number

The N configurator assigns to each handset an identification number within the system. The handsets must be configured in progressive order.


In case of handsets with parallel connection (max 3) inside the apartment without 346850 apartment interface, these must be configured using the same N configurator.



P - Auxiliary function pushbutton

The auxiliary function pushbutton on the handset 344212 can be used to perform several functions, determined by the value of the configurator connected to P.


Configurator in P	Auxiliary pushbutton function
0	Light actuator control
1 - 7	Activation of the audio function on the entrance panel configured with P = 1 to 7
9	Call to the Switchboard, in systems with the 8/2-WIRE interface 346150

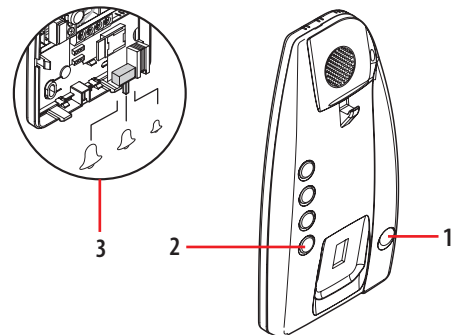

Legend


- 1 - Door lock key
- 2 - Key for auxiliary functions
- 3 - Bell volume adjustment

Wall mounted installation

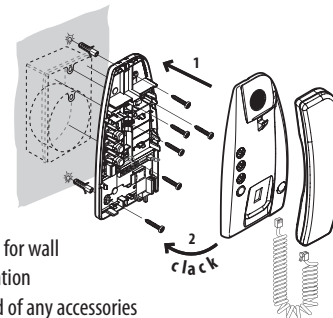

Handset suitable for wall mounted installation without the need of any accessories

Table installation

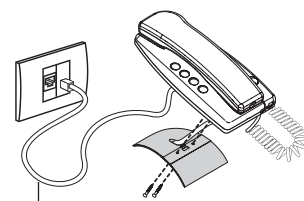

336803

5 - Brown

6 - Brown-white

Table installation of the handset with base 337242