


DATA SHEET

COD. **21047335**

MULTIFUNCTION GSM/SMS GATE OP. CONTROL UNIT PHONE COMMUNIC.

GSM communicator for transmitting alarm signals and receiving commands via SMS messages, operation both as an accessory on the SimpleHome home automation bus, where it allows the transmission of 40 programmable mobile SMS text messages and the receipt of 40 commands via SMS messages, both as a stand-alone combiner with 4 programmable inputs and 2 programmable outputs, of which one can also be used as a gate opener (CLIP function) and the other as a boiler control, as it offers the option of incorporating a temperature sensor, finally, it is capable of functioning as an alarm mini-control unit with 2 inputs + two 24 hours or 4 alarmable inputs, 12 Vdc power supply, Dimensions: 160x90x58 mm (4 DIN modules).

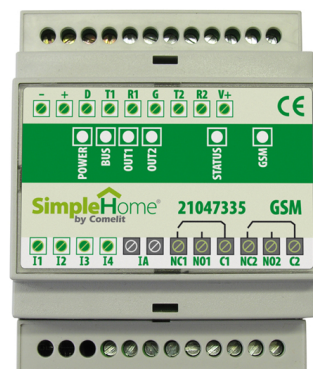

Mounting/Installation

Flush-mounted:	No
DIN rail mounted:	Yes
DIN modules (no.):	4

Hardware specifications

SIM slot:	Yes
Removable terminals:	No

Software/firmware specifications

Send SMS:	Yes
Storable telephone numbers (no.):	99

Connectivity

Digital inputs:	4
Relay output:	2 x 3A 24Vdc

Functions - Settings

Remote control via browser:	Yes
Remote control via SMS:	Yes

Technical properties

Built-in aerial:	Yes
Temperature range:	0 / 50

General info

Product height (mm):	160
----------------------	-----

DATA SHEET

Product width (mm):	90
Product depth (mm):	58