



Electronics Ltd

Application – BS5839 Intruder systems and Installations that require a battery back i.e. access control, Entry Systems and General Use

*Pelham Works
Pelham Street
Wolverhampton
WV3 0BJ*



Tel: (01902) 656667

Web: www.rgl.co

Email: info@rgl.co

**Part Number: 2401SM- CH (1 AMP)
2402SM- CH (2 AMP)
2403SM- CH (3 AMP)
(Larger plate) 2405SM- CH (5 AMP)**

- Full Current Load
- 27.6 volt dc regulated output
- Additional battery charging
- Deep discharge protection
- Current Limiting
- LED Indicators
 - Mains
 - Battery Output
- Short Circuit Protection
- Battery Current Limiting circuit (Electronic)
- Mains Transient Protection


2402, 3, 5SM-CH

- 110h x 270w x 50d (all mm)
- Weight = 800g (unboxed)



2402, 3, 5SM-CH

2401SM-CH

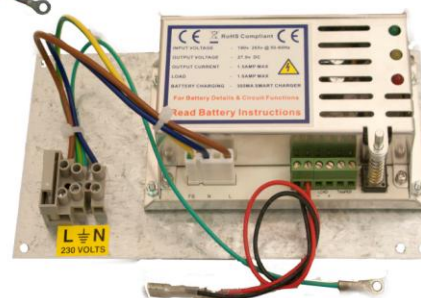

CE APPROVED
EMC TO EN55011
RFI TO EN55022

- Switchmode Technology
- Model mounted on Steel chassis plate
- On Board Tamper Protection
- Separate Mains terminal connection (not on pcb)
- Suitable for mounting into existing housings
- Ventilation must be allowed if fitting into an existing housing
- More efficient environmentally friendly

2401SM-CH

- 110h x 200w x 40d (all mm)
- Weight 500g (unboxed)