



TO FURTHER PHONES  
AND CD204 AS REQ.

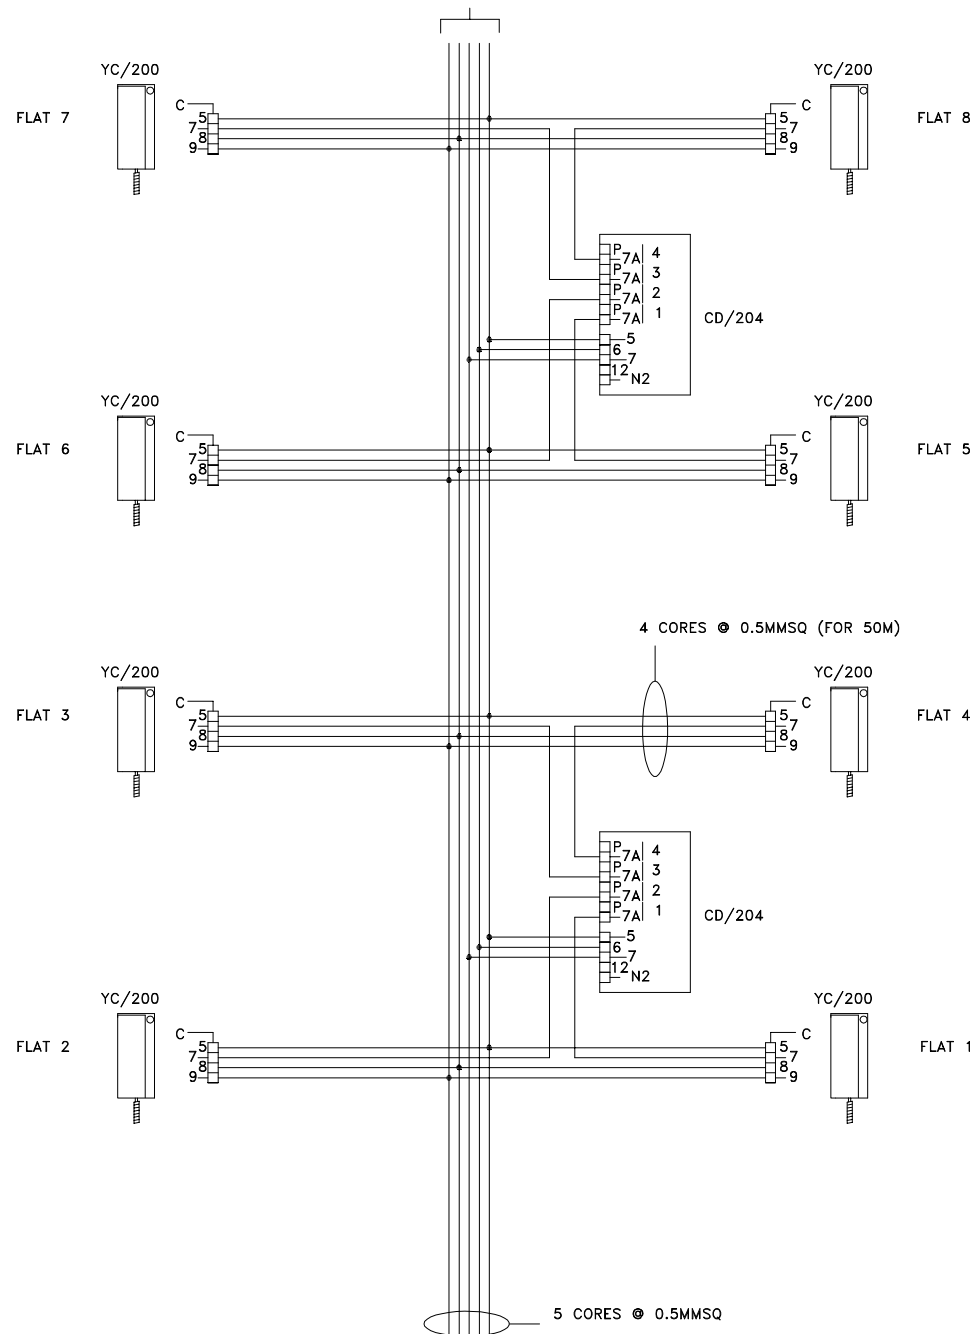

NOTE:  
THIS DRAWING INDICATES AND ASSUMES THE USE OF  
A MINIMUM OF 0.5MMSQ CSA PARALLEL CONDUCTORS.  
INCORRECT CABLE SPEC CAN CAUSE DIGITAL  
SIGNALING PROBLEMS.

8 CORES @ 0.5MMSQ  
+ 4 CORES @ 1.0MMSQ (FOR 150M)

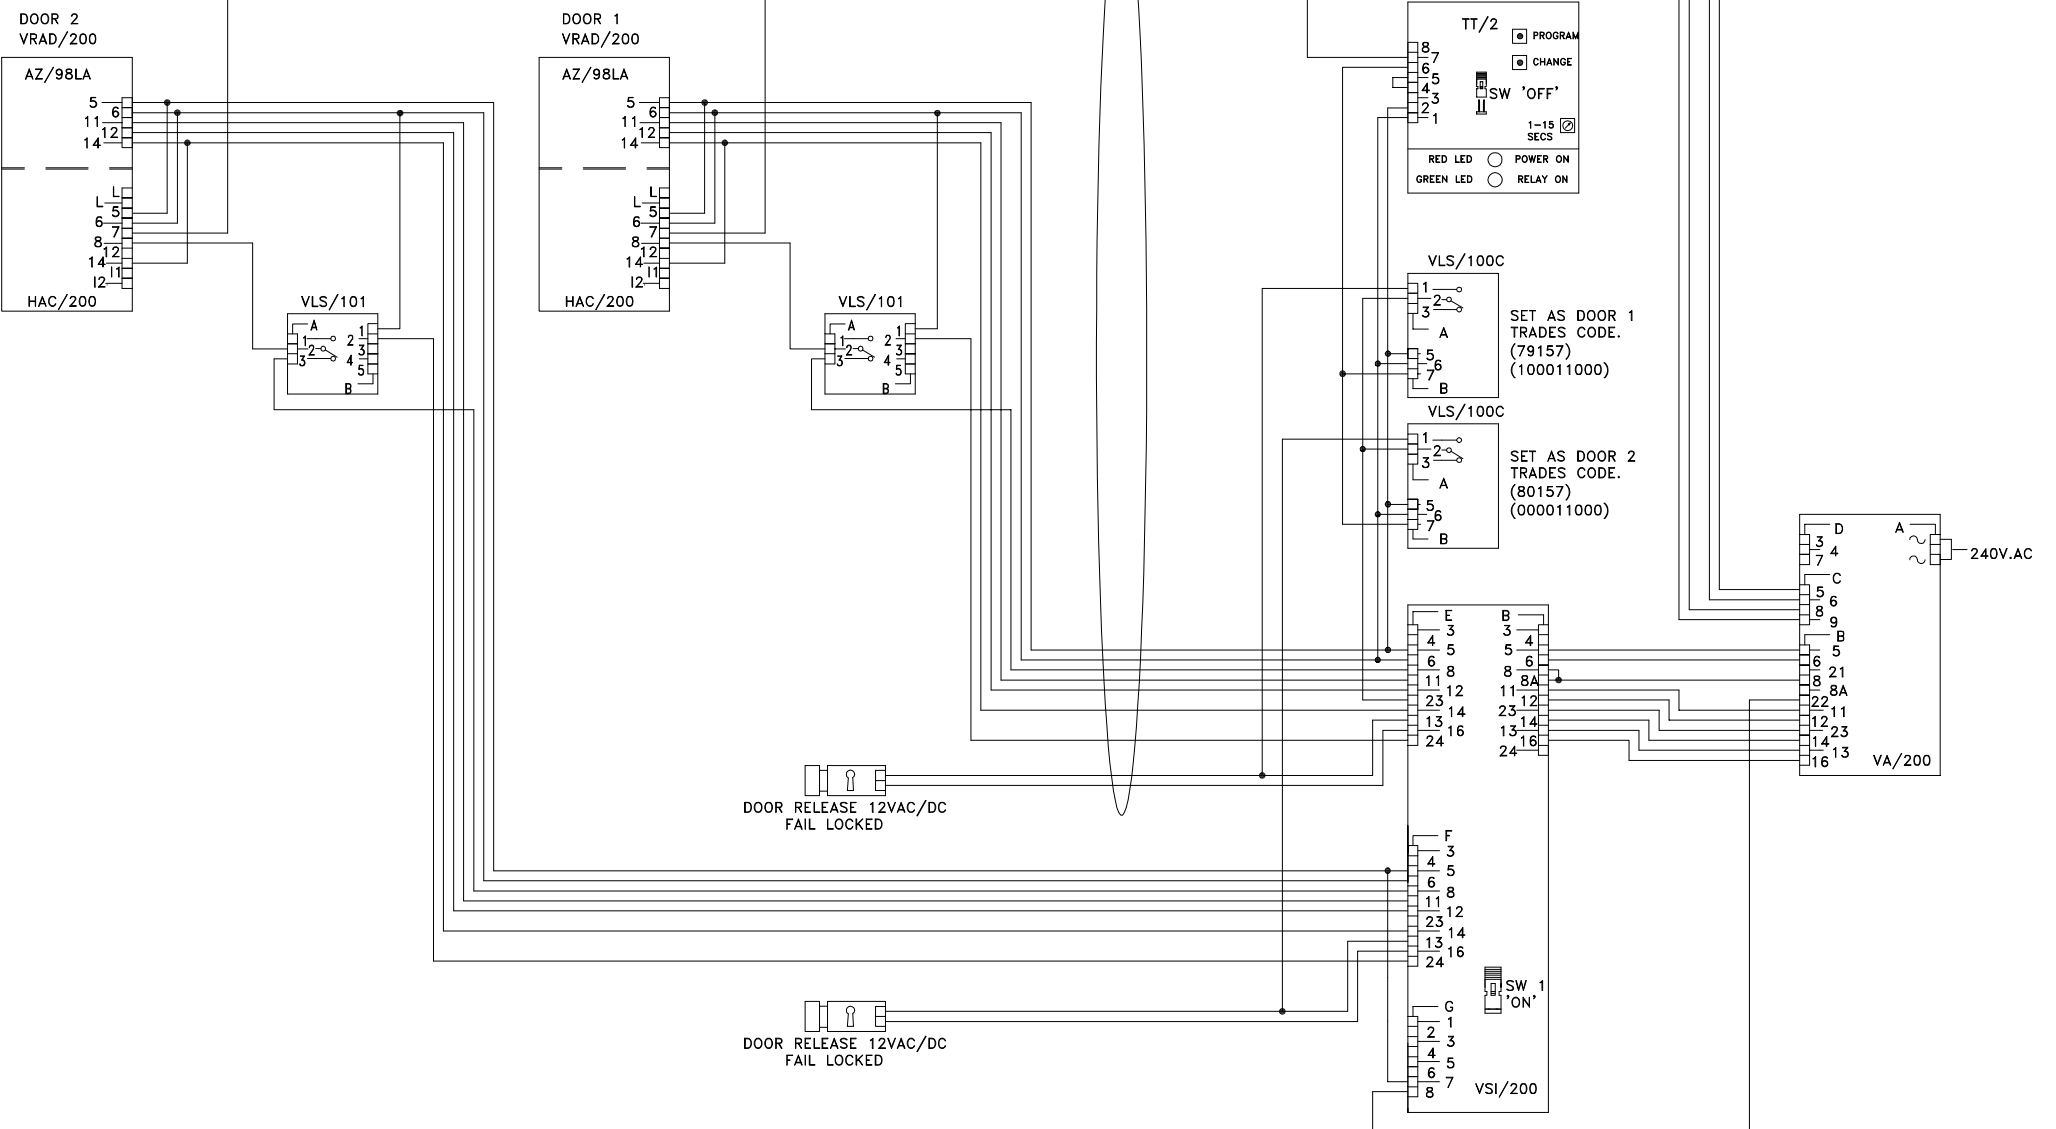

BPT (UK) LTD. HERTS. ENGLAND	PREPARED FOR INSTALLER INFORMATION	DATE: 17/10/07	DRAWN: RC
		REVISED:	
DRAWING TITLE: 2 x VR DIGITAL AUDIO ENTRY PANEL WITH TRADES & LYNEA AUDIO HANDSETS		DRAWING No: B-XV2YNLTT(A)(AUD)	