


NOTE:  
THIS DRAWING INDICATES AND ASSUMES THE USE OF  
BPT COMPOSITE CABLES OR A SUITABLE EQUIVALENT.  
ENSURE ALL ADDITIONAL CONNECTIONS ARE  
A MINIMUM OF 0.5MM CSA PER CORE.

NOTE: CABLE EQUIVALENTS

VCM/130 = RG59 COAX + 4 CORES @ 1.0MMSQ + 8 CORES @ 0.5MMSQ  
VCM/60 = RG59 COAX + 2 CORES @ 1.0MMSQ + 3 CORES @ 0.5MMSQ

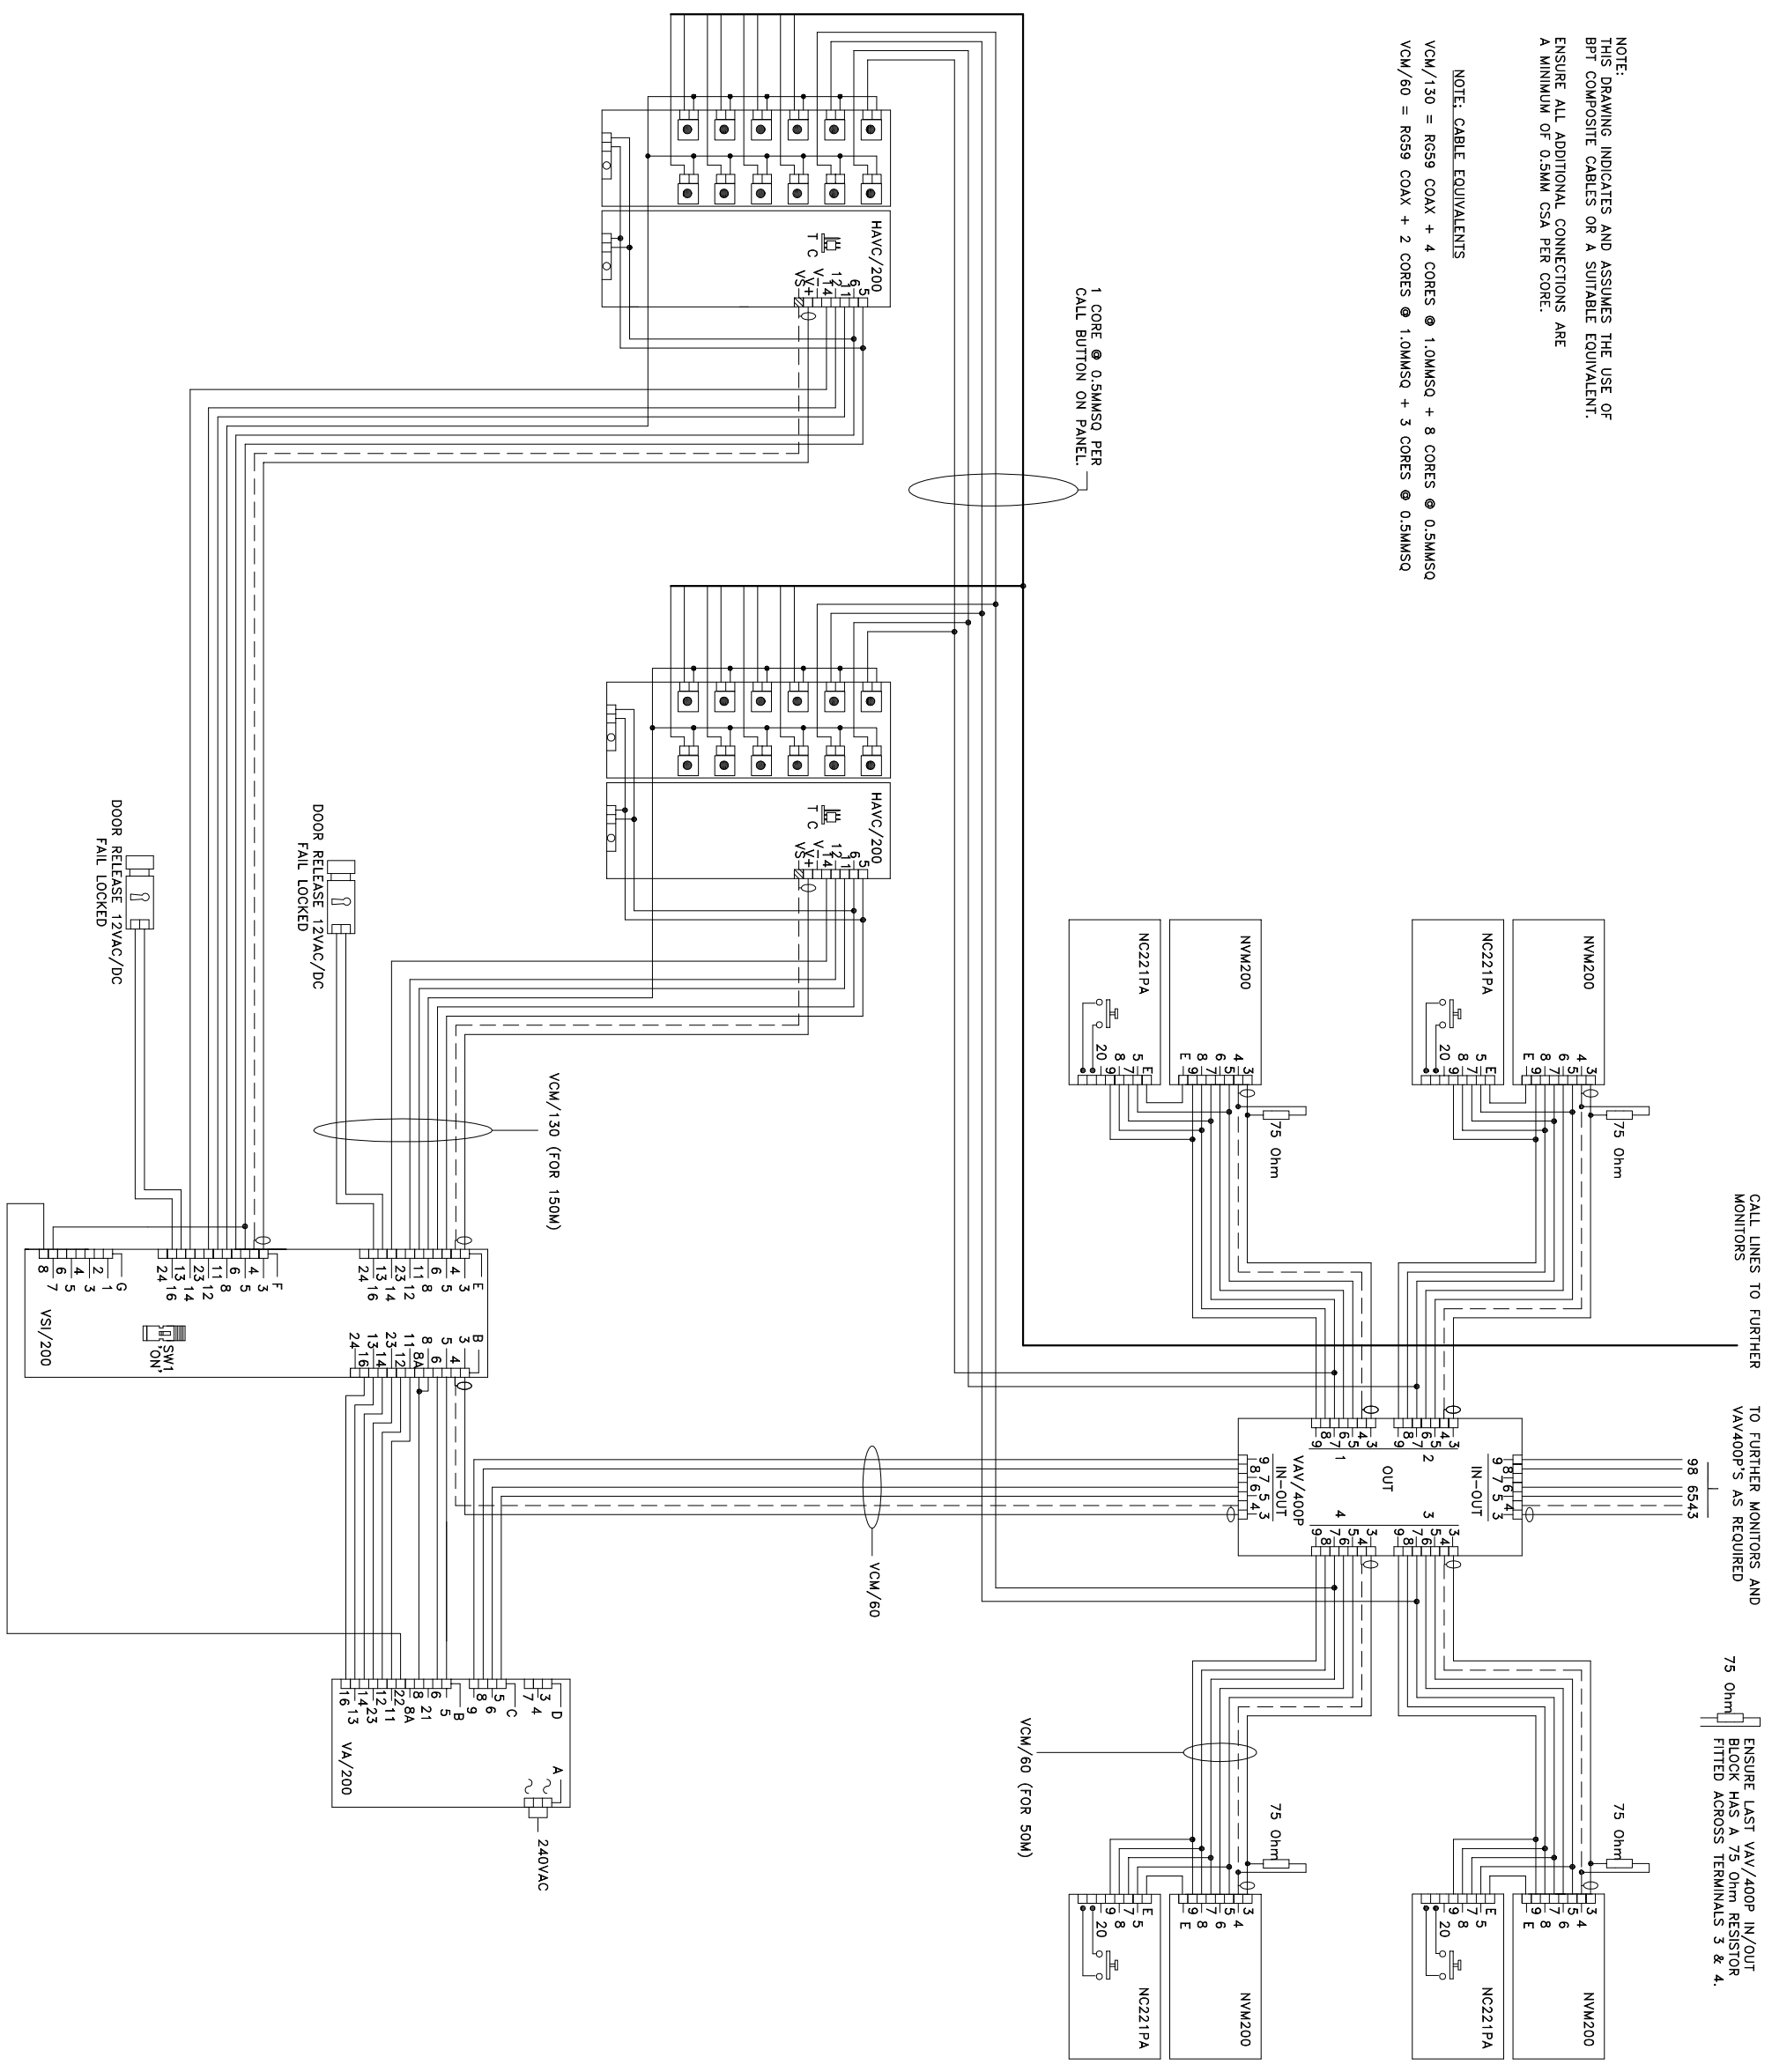

CALL LINES TO FURTHER  
MONITORS

TO FURTHER MONITORS AND  
VAV400P'S AS REQUIRED

75 Ohm  
ENSURE LAST VAV/400P IN/OUT  
BLOCK HAS A 75 Ohm RESISTOR  
FITTED ACROSS TERMINALS 3 & 4.

BPT (UK) LTD. HERTS, ENGLAND	PREPARED FOR	
	INSTALLER INFORMATION	
DRAWING TITLE: 2 X MULTI-BUTTON TARGHA VIDEO ENTRY PANELS & NOVA COLOUR MONITORS	DATE: 08/04/04	DRAWN:RC
	REVISED:	
	DRAWING No: B-NIT2NNL	