



CALL LINES TO FURTHER MONITORS

TO FURTHER MONITORS AND VAV400P'S AS REQUIRED



ENSURE LAST VAV/400P IN/OUT BLOCK HAS A 75 Ohm RESISTOR FITTED ACROSS TERMINALS 3 & 4.

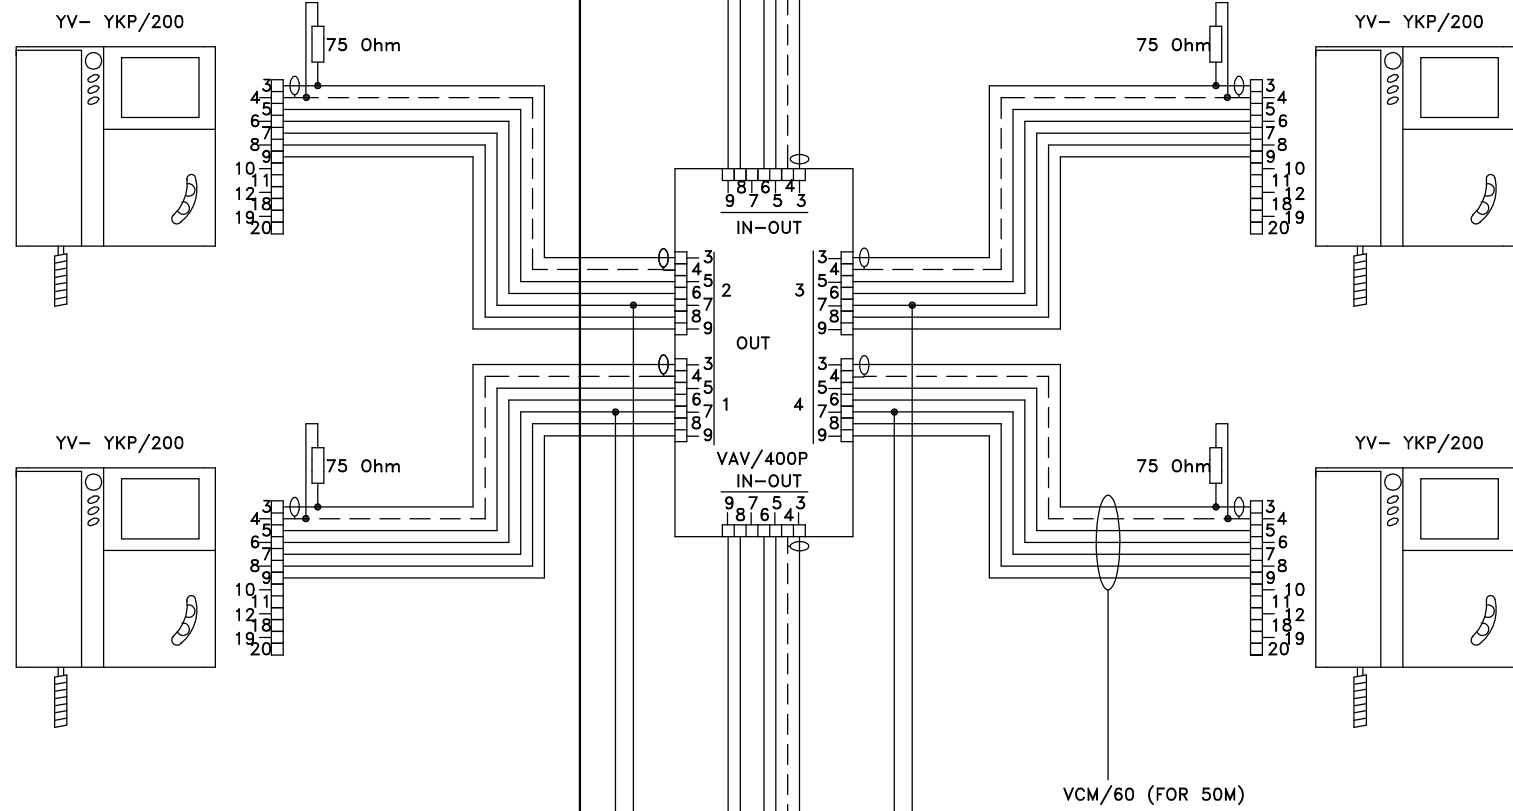


NOTE: THIS DRAWING INDICATES AND ASSUMES THE USE OF BPT COMPOSITE CABLES OR A SUITABLE EQUIVALENT.

ENSURE ALL ADDITIONAL CONNECTIONS ARE A MINIMUM OF 0.5MM CSA PER CORE.

NOTE: CABLE EQUIVALENTS

VCM/130 = RG59 COAX + 4 CORES @ 1.0MMSQ + 8 CORES @ 0.5MMSQ  
 VCM/60 = RG59 COAX + 2 CORES @ 1.0MMSQ + 3 CORES @ 0.5MMSQ

1 CORE @ 0.5MMSQ PER CALL BUTTON ON PANEL.

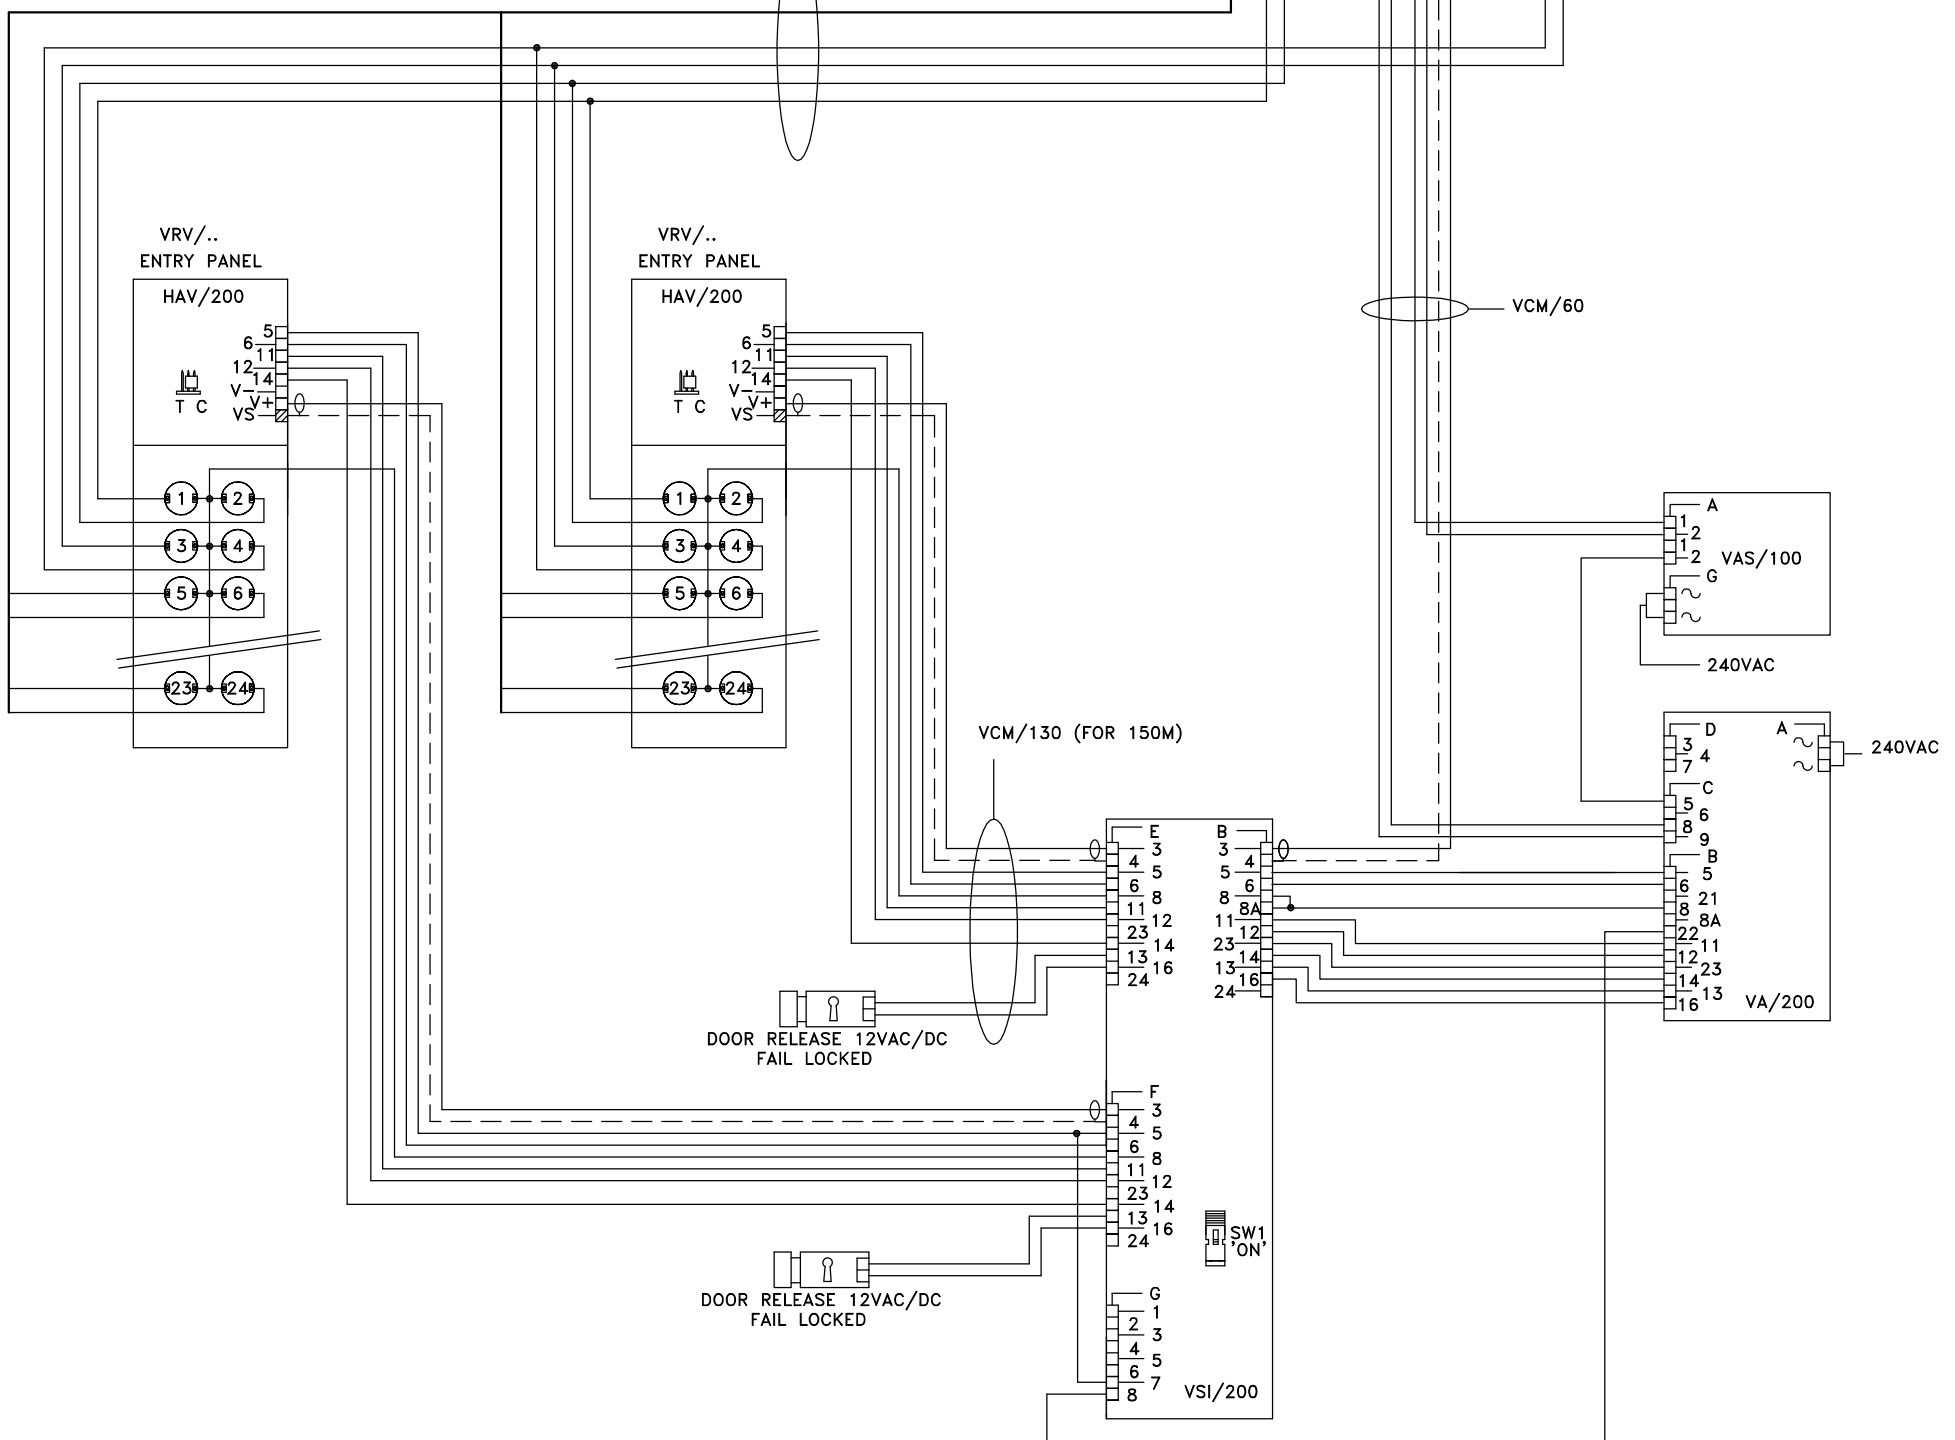

BPT (UK) LTD. HERTS. ENGLAND	PREPARED FOR INSTALLER INFORMATION	DATE: 20/01/04	DRAWN:RC
		REVISED:	
DRAWING TITLE:	MULTI-FLAT INSTALLATION USING 2 VR VIDEO ENTRY PANELS & LYNEA MONITORS	DRAWING No: B-NV2YNL	