



CALL LINES TO FURTHER MONITORS  
 TO FURTHER MONITORS AND VAV/400P'S AS REQUIRED  
 75 Ohm  
 ENSURE LAST VAV/400P IN/OUT BUCK HAS A 75 Ohm RESISTOR FITTED ACROSS TERMINALS 3 & 4.

NOTE:  
 THIS DRAWING INDICATES AND ASSUMES THE USE OF BPT COMPOSITE CABLES OR A SUITABLE EQUIVALENT. ENSURE ALL ADDITIONAL CONNECTIONS ARE A MINIMUM OF 0.5MM CSA PER CORE.

NOTE: CABLE EQUIVALENTS  
 VCM/130 = RG59 COAX + 4 CORES @ 1.0MMSQ + 8 CORES @ 0.5MMSQ  
 VCM/60 = RG59 COAX + 2 CORES @ 1.0MMSQ + 3 CORES @ 0.5MMSQ

1 CORE @ 0.5MMSQ PER CALL BUTTON ON PANEL.

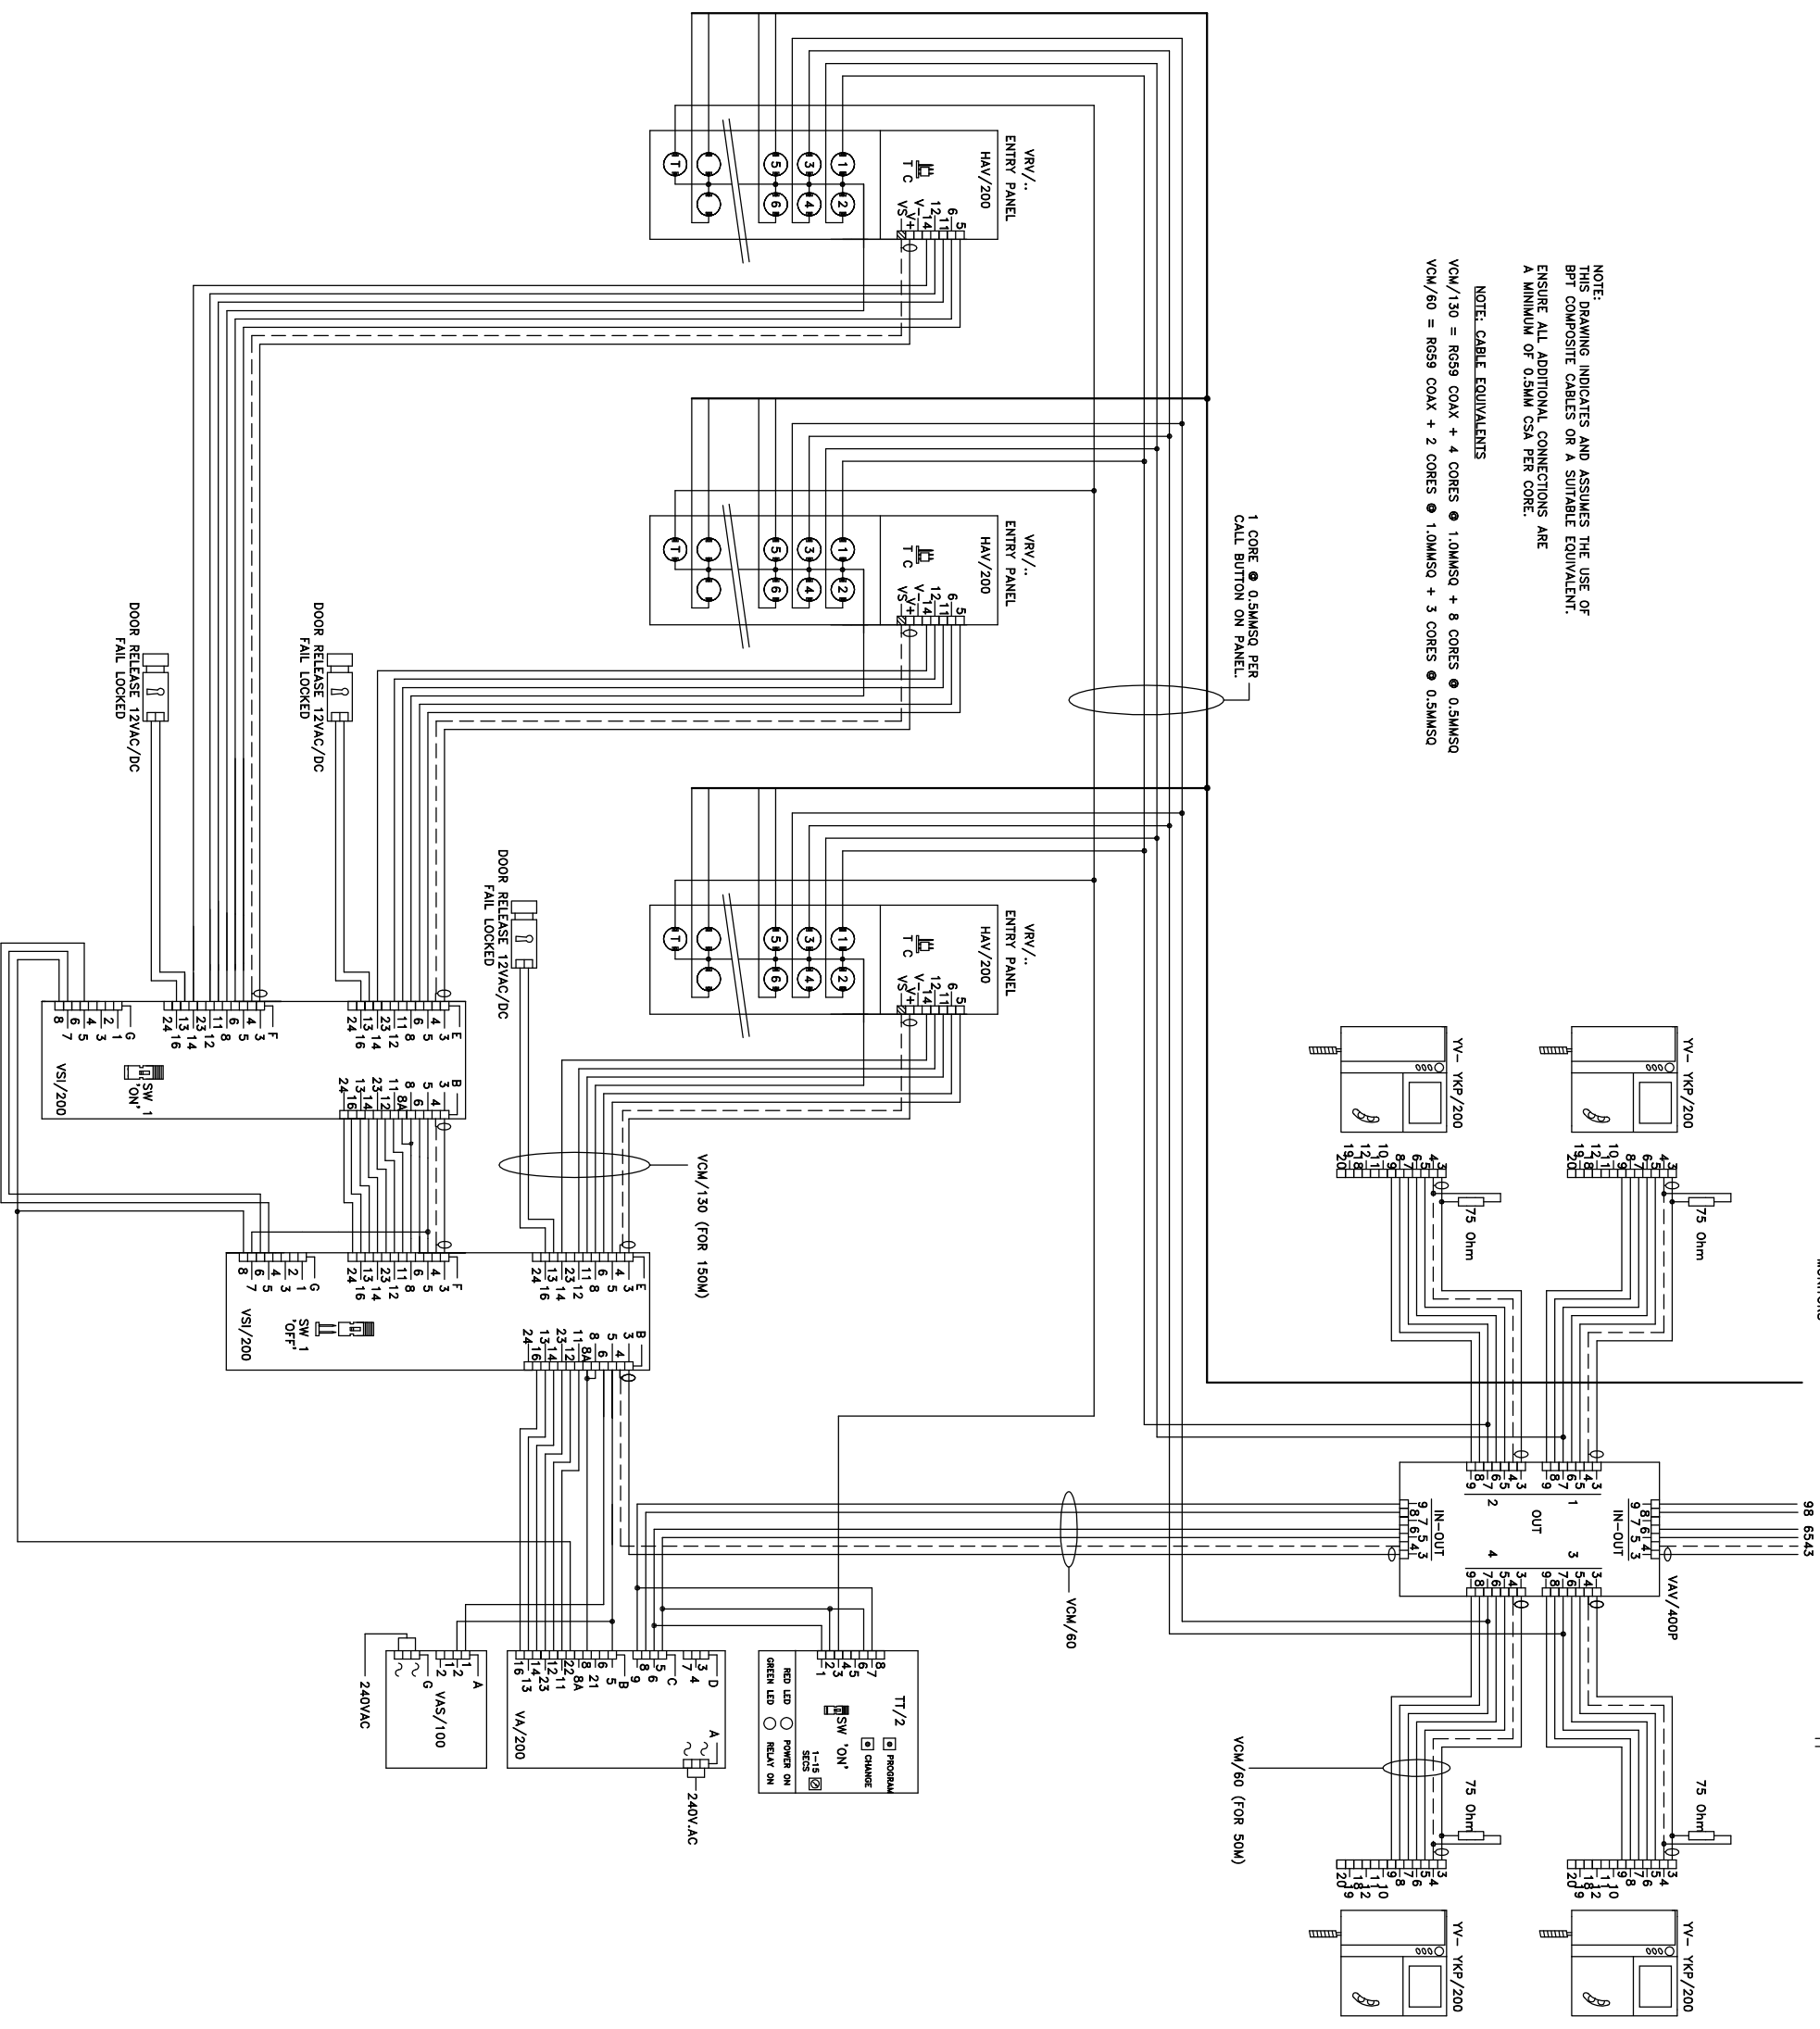

BPT (UK) LTD. HERTS. ENGLAND	PREPARED FOR INSTALLER INFORMATION	DATE: 02/08/04	DRAWN:RC
DRAWING TITLE: MULTI-FLAT INSTALLATION USING 3 VR VIDEO ENTRY PANELS WITH TRADES		REVISED:	
		DRAWING No: B-NV3YNLTT	