


NOTE:  
THIS DRAWING INDICATES AND ASSUMES THE USE OF  
A MINIMUM OF 0.5MM CSA PER CORE.  
ENSURE ALL CONTROL EQUIPMENT IS LOCATED CENTRALLY.

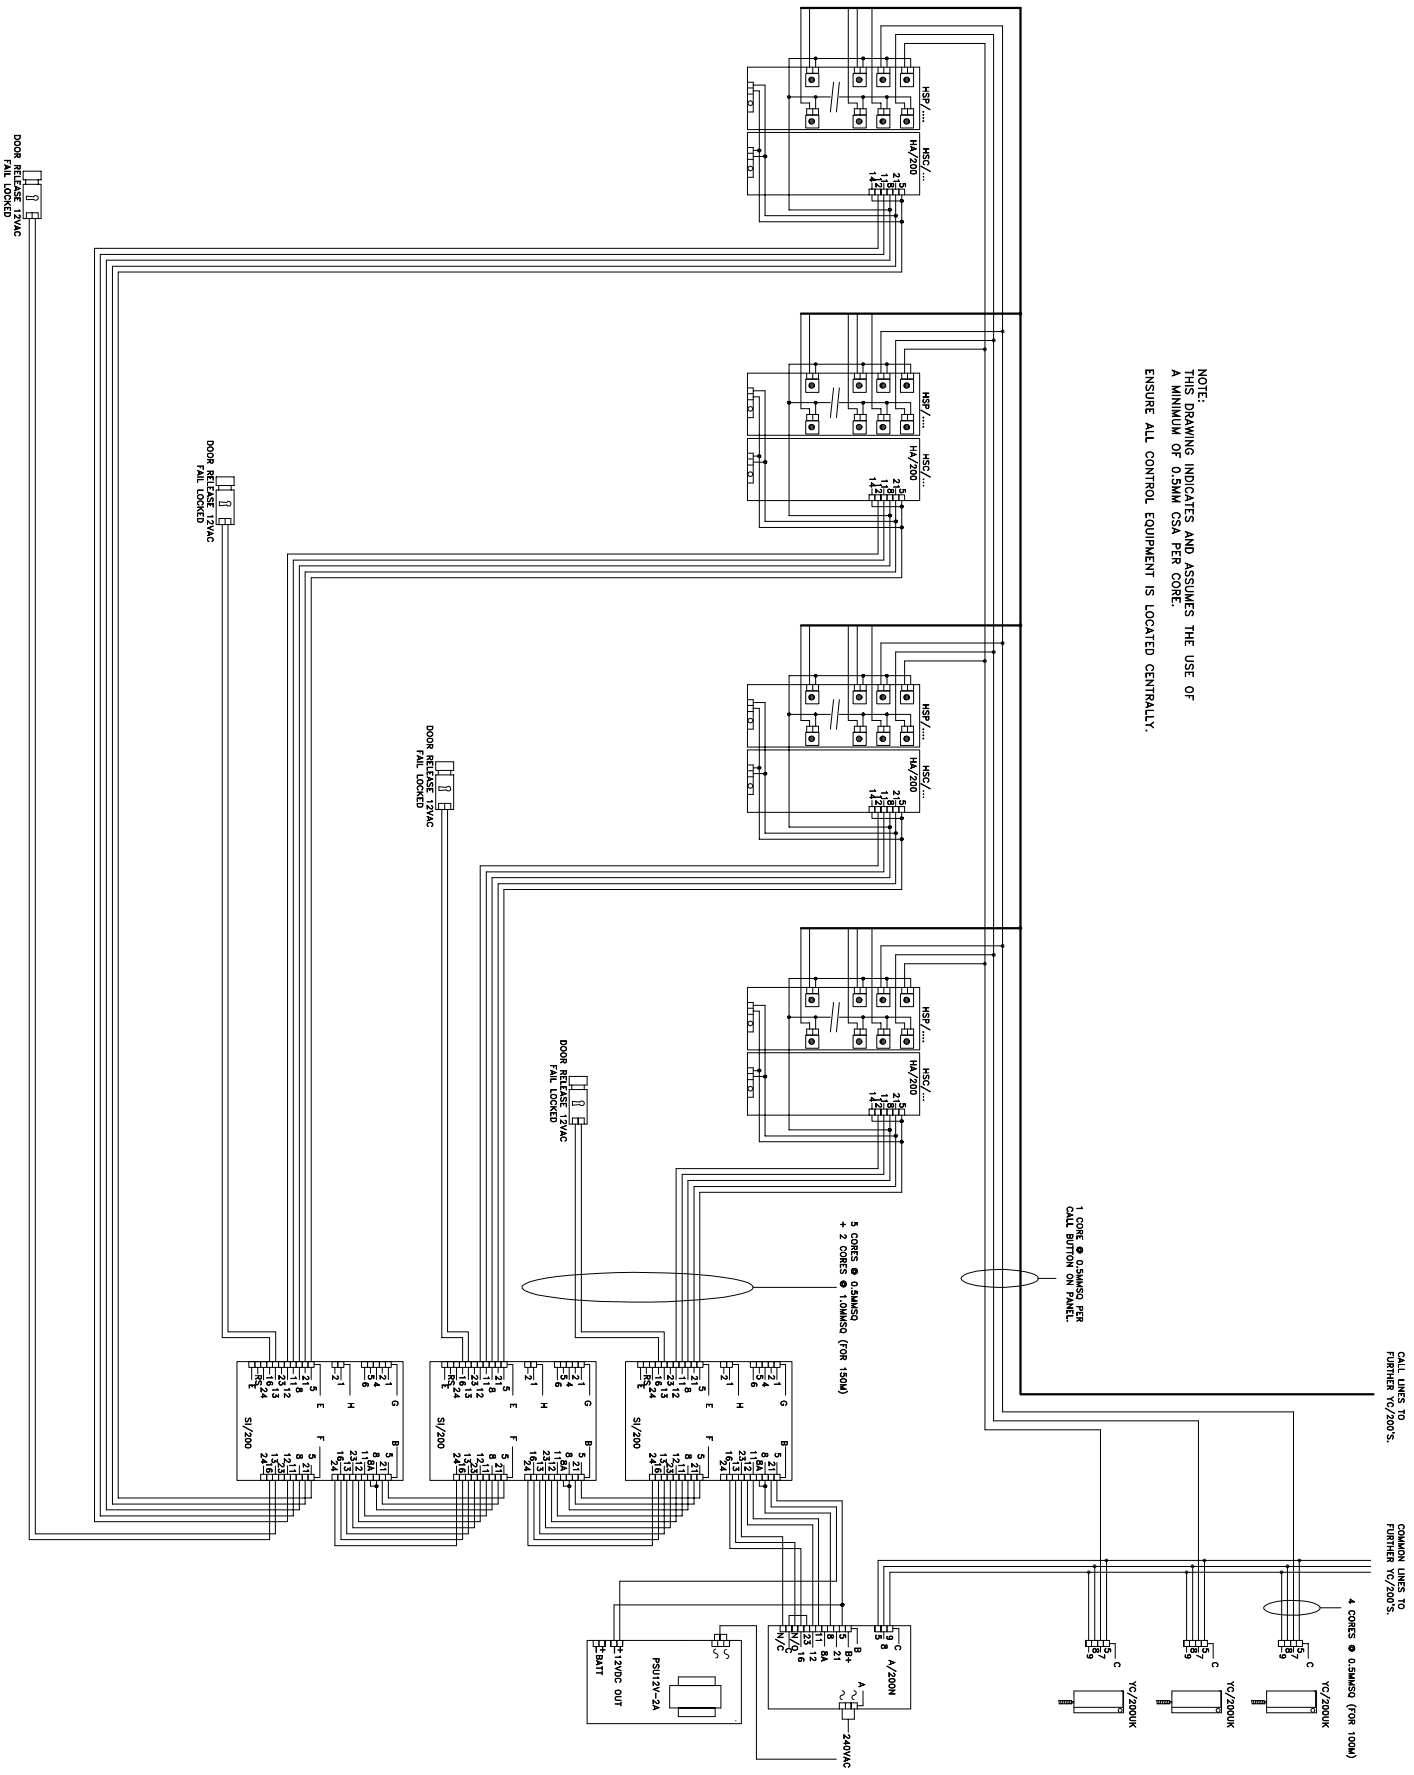

|  |                                       |                      |          |
|--|---------------------------------------|----------------------|----------|
| BPT (UK) LTD.<br>HERTS. ENGLAND  | PREPARED FOR<br>INSTALLER INFORMATION | DATE: 25/09/08       | DRAWN:RC |
| DRAWING TITLE:<br>4 X MULTI BUTTON TARGHA AUDIO ENTRY PANELS<br>& LYNEA HANDSETS | REVISED:                              |                      |          |
|  |                                       | DRAWING No: E-NI4YNL |          |

CALL LINES TO  
FURTHER VC/200S.

COMMON LINES TO  
FURTHER VC/200S.

4 CORES ● 0.5MM2 (FOR 1500)

VC/2000K

VC/2000K

VC/2000K

VC/2000K

VC/2000K

VC/2000K

VC/2000K

VC/2000K

VC/2000K

VC/2000K

VC/2000K

VC/2000K

VC/2000K

VC/2000K

VC/2000K

VC/2000K

VC/2000K

VC/2000K

VC/2000K

VC/2000K

VC/2000K

VC/2000K

VC/2000K

VC/2000K

VC/2000K

VC/2000K

VC/2000K

VC/2000K

VC/2000K

VC/2000K

VC/2000K

VC/2000K

VC/2000K

VC/2000K

VC/2000K

VC/2000K

VC/2000K

VC/2000K

VC/2000K

VC/2000K

VC/2000K

VC/2000K

VC/2000K

VC/2000K

VC/2000K

VC/2000K

VC/2000K