


# 2-wire Video Door Entry Kit

with: Wi-Fi and TUYA App call



**SRS**  
door entry systems

7052WKIT-01TUYA

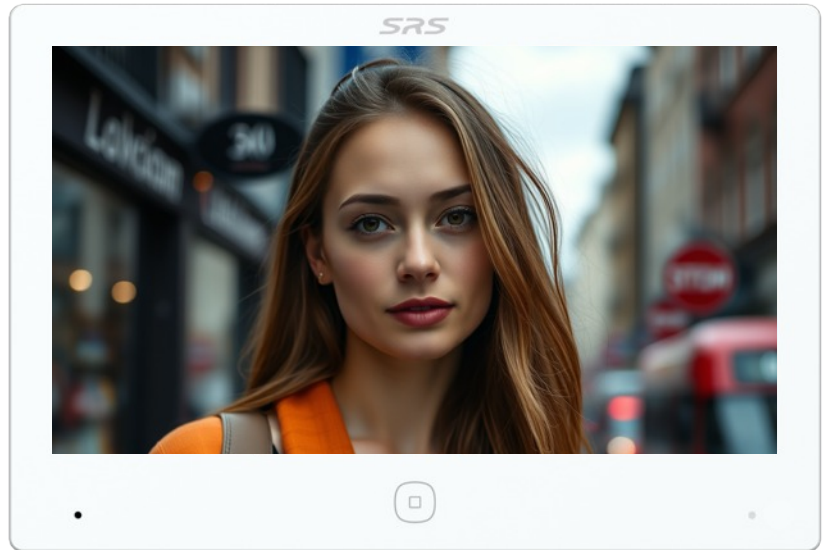

## SRS 2-Wire Digital Video Door Phone with Wi-Fi and TUYA App call

This smart door entry solution is designed for ease of use and flexibility.

Whether you're upgrading an existing system or starting from scratch, the 7052WKIT-01TUYA delivers excellent functionality, convenience, and reliability.

With easy installation via a two-wire setup and full compatibility with the TuyaSmart App, this system offers remote monitoring, door entry, and access control from anywhere - perfect for both residential and commercial applications.

Featuring HD video quality, remote access, and advanced security features like night vision, picture and video recording, and lock control, the 7052WKIT-01TUYA ensures your property is always protected. With a sleek and weatherproof design, it's ideal for any environment.

Ideal for homes and businesses alike.

## Remote Monitoring & Intercom:

Use local Wi-Fi to connect the TuyaSmart App and communicate with visitors and unlock doors from anywhere.

## High-Definition Video:

2 MP pixels for crisp, clear video calls.

## Flexible Storage:

Up to 128GB Micro SD card storage, keeping your images and videos safe.

## Security Features:

Electric lock release, gate lock release, and secondary bell function.

## Night Vision:


Infrared LEDs ensure clear visuals in low-light conditions.

## Durability:

IP55-rated for weather-resistant outdoor use.


## Indoor Unit Convenience:

Ambient lighting and weather forecast functionality.





2 wires

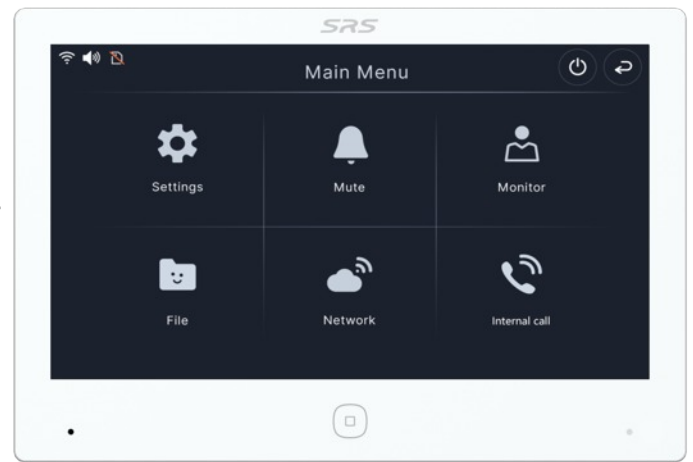

**Cable Distances** 2 core stranded flexible cable with cross sectional area (CSA). CW1308, CAT 5, CAT 6 cables can be used if CSA is respected

|               |            |
|---------------|------------|
| 0 - 15 metres | 0.2 mm CSA |
| 0 - 30 metres | 0.5 mm CSA |
| 0 - 50 metres | 1.0 mm CSA |
| 0 - 80 metres | 1.5 mm CSA |

### Notes:

Add an optional second monitor and local monitor call button. Master monitor requires 15V DC power supply (included).

#### Entrance Panel

|                              |                                  |
|------------------------------|----------------------------------|
| <b>Camera</b>                | 1080P Full HD                    |
| <b>Viewing Angle</b>         | Horizontal ≤110°, Vertical ≤65°  |
| <b>Night Vision LED</b>      | 940 nm Infrared                  |
| <b>Operating Temperature</b> | -20°C to 50°C                    |
| <b>IP Rating</b>             | IP55 (Weather-resistant)         |
| <b>Dimensions</b>            | 134 x 52 x 40 (mm hwd) inc. hood |

#### Video Monitor

|                          |                                                        |
|--------------------------|--------------------------------------------------------|
| <b>Display Dimension</b> | 7"                                                     |
| <b>Resolution</b>        | 1024 x 600 (RGB)                                       |
| <b>Ring/Talk Volume</b>  | 75 ~ 85dB (at 30cm)                                    |
| <b>Picture Storage</b>   | >10 pictures, with circulation on TF card              |
| <b>Video Recording</b>   | MP4 format, Max. recording time: 120s, File size: 52KB |
| <b>Dimensions</b>        | 118 x 174 x 22 (mm hwd)                                |

### Warranty

This system is covered by a 2-year warranty against defects in materials and workmanship.