


2-wire Video Door Entry Kit

with: Wi-Fi and TUYA App call



SRS
door entry systems

7052WKIT-01TUYA

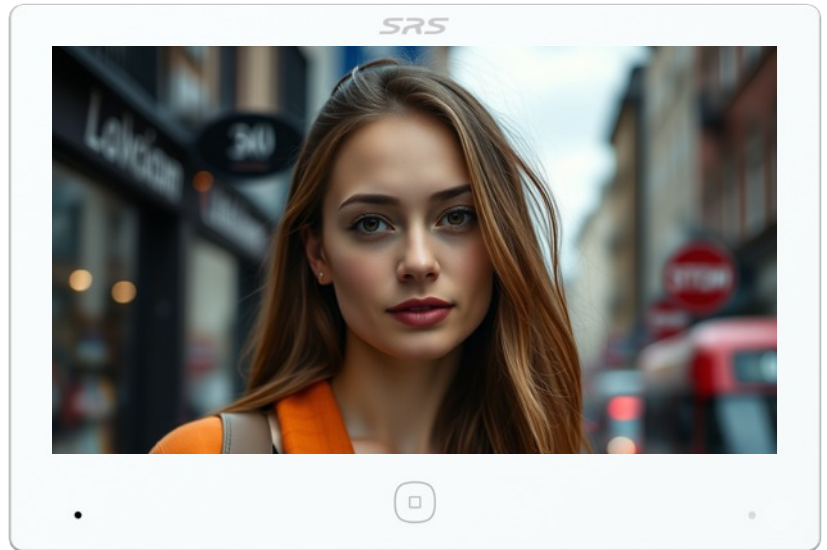

SRS 2-Wire Digital Video Door Phone with Wi-Fi and TUYA App call

This smart door entry solution is designed for ease of use and flexibility.

Whether you're upgrading an existing system or starting from scratch, the 7052WKIT-01TUYA delivers excellent functionality, convenience, and reliability.

With easy installation via a two-wire setup and full compatibility with the TuyaSmart App, this system offers remote monitoring, door entry, and access control from anywhere - perfect for both residential and commercial applications.

Featuring HD video quality, remote access, and advanced security features like night vision, picture and video recording, and lock control, the 7052WKIT-01TUYA ensures your property is always protected. With a sleek and weatherproof design, it's ideal for any environment.

Ideal for homes and businesses alike.

Remote Monitoring & Intercom:

Use local Wi-Fi to connect the TuyaSmart App and communicate with visitors and unlock doors from anywhere.

High-Definition Video:

2 MP pixels for crisp, clear video calls.

Flexible Storage:

Up to 128GB Micro SD card storage, keeping your images and videos safe.

Security Features:

Electric lock release, gate lock release, and secondary bell function.

Night Vision:


Infrared LEDs ensure clear visuals in low-light conditions.

Durability:

IP55-rated for weather-resistant outdoor use.


Indoor Unit Convenience:

Ambient lighting and weather forecast functionality.





2 wires

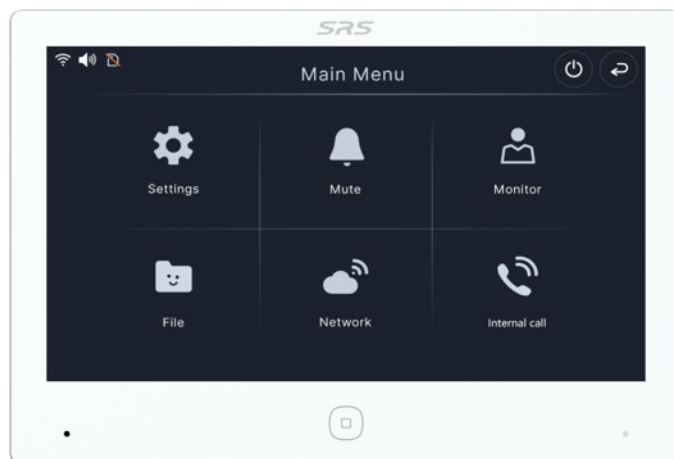

Cable Distances 2 core stranded flexible cable with cross sectional area (CSA). CW1308, CAT 5, CAT 6 cables can be used if CSA is respected

0 - 15 metres	0.2 mm CSA
0 - 30 metres	0.5 mm CSA
0 - 50 metres	1.0 mm CSA
0 - 80 metres	1.5 mm CSA

Notes:

Add an optional second monitor and local monitor call button. Master monitor requires 15V DC power supply (included).

Entrance Panel

Camera	1080P Full HD
Viewing Angle	Horizontal ≤110°, Vertical ≤65°
Night Vision LED	940 nm Infrared
Operating Temperature	-20°C to 50°C
IP Rating	IP55 (Weather-resistant)
Dimensions	134 x 52 x 40 (mm hwd) inc. hood

Video Monitor

Display Dimension	7"
Resolution	1024 x 600 (RGB)
Ring/Talk Volume	75 ~ 85dB (at 30cm)
Picture Storage	>10 pictures, with circulation on TF card
Video Recording	MP4 format, Max. recording time: 120s, File size: 52KB
Dimensions	118 x 174 x 22 (mm hwd)

Warranty

This system is covered by a 2-year warranty against defects in materials and workmanship.