



IP VIDEO DOOR ENTRY KIT

with: Face Recognition & TUYA App



SRS
door entry systems

705IPKIT-01FACE

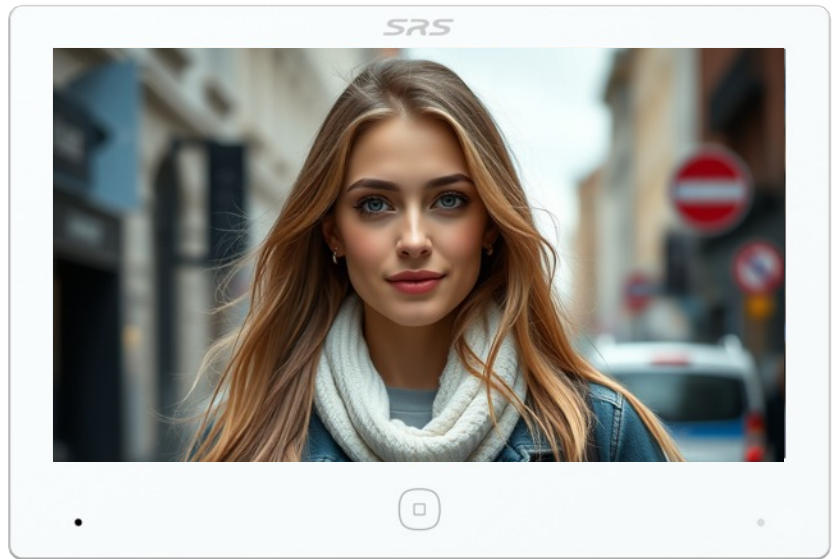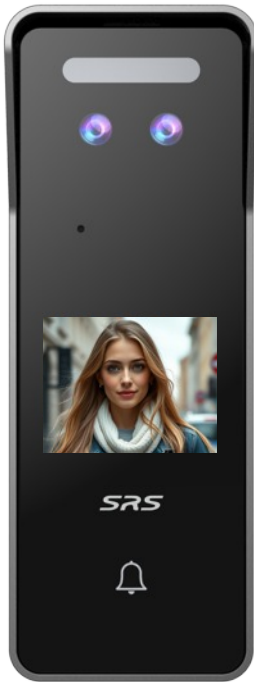

No cards, No Codes, No Hassle.

The SRS 705IPKIT-01FACE is a next-generation video door phone system, that prioritises both performance and ease of installation. This kit isn't just about aesthetics; it's about providing advanced features and convenience.

Day and night, the high-definition camera with night vision delivers sharp, clear images for precise identification which adds security and confidence.

Review your visitors

The system supports up to a 512 GB SD-card. The SD-card storage capacity ends the need for cloud subscriptions and ensures that critical footage is always available locally.

Advanced Face Recognition Technology.

The face recognition feature is a layer of security that allows for quick and secure access for vehicle or pedestrian access. Users have less keys to carry around, making the access control hassle free.

Supports 2 Entrances

The video kit supports configuration of two door stations and a single indoor monitor. This solution is suitable for a wider range of properties that require control of both front and rear entrances.

Easy Setup


The indoor monitor connects to the home router via Wi-Fi, reducing the need for wiring in most scenarios. For reliable communication and to ensure best performance, direct cable connection is also supported. If the Wi-Fi signal is not strong, you can use the network Ethernet cable.





Network Cable

80 metres

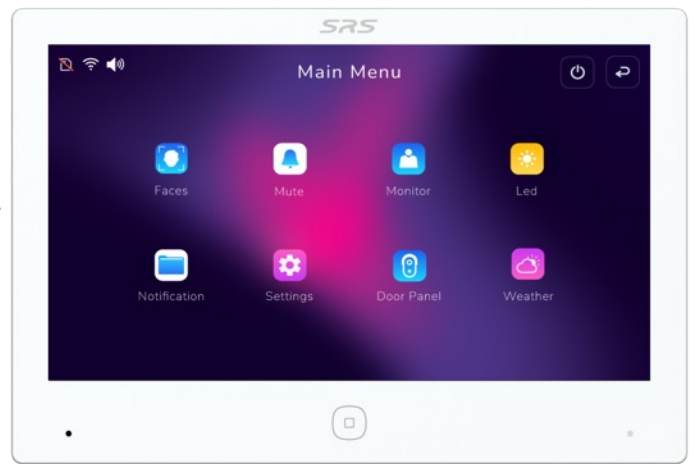

Notes:

Add an optional second entrance panel.

The monitor requires 15V DC power supply (included).

For best Wi-Fi performance, ensure the indoor unit is located within a strong signal range of the home router.

A high-power router is recommended for larger properties or areas with potential interference. Consider using the network cable if Wi-Fi signal is not strong enough.

Entrance Panel	
Camera	1920 x 1080P 2MP HD
Connectivity	Network Cable
Night Vision LED	940 nm Infrared
Operating Temperature	-20°C to 60°C
IP Rating	IP55 (Weather-resistant)
Dimensions	161 x 60 x 31 (mm hwd)

Video Monitor	
Display Dimension	7"
Resolution	1024 x 600 (TFT LCD (colour))
Ring/Talk Volume	≥ 70dB (at 30cm)
Operating Temperature	-20°C to 60°C
Picture Storage	Up to 128GB TF card for storage
Dimensions	135 x 180 x 18 (mm hwd)

Warranty

This system is covered by a 2-year warranty against defects in materials and workmanship.