



8495 Planux Kit Three Monitors in Cascade conection

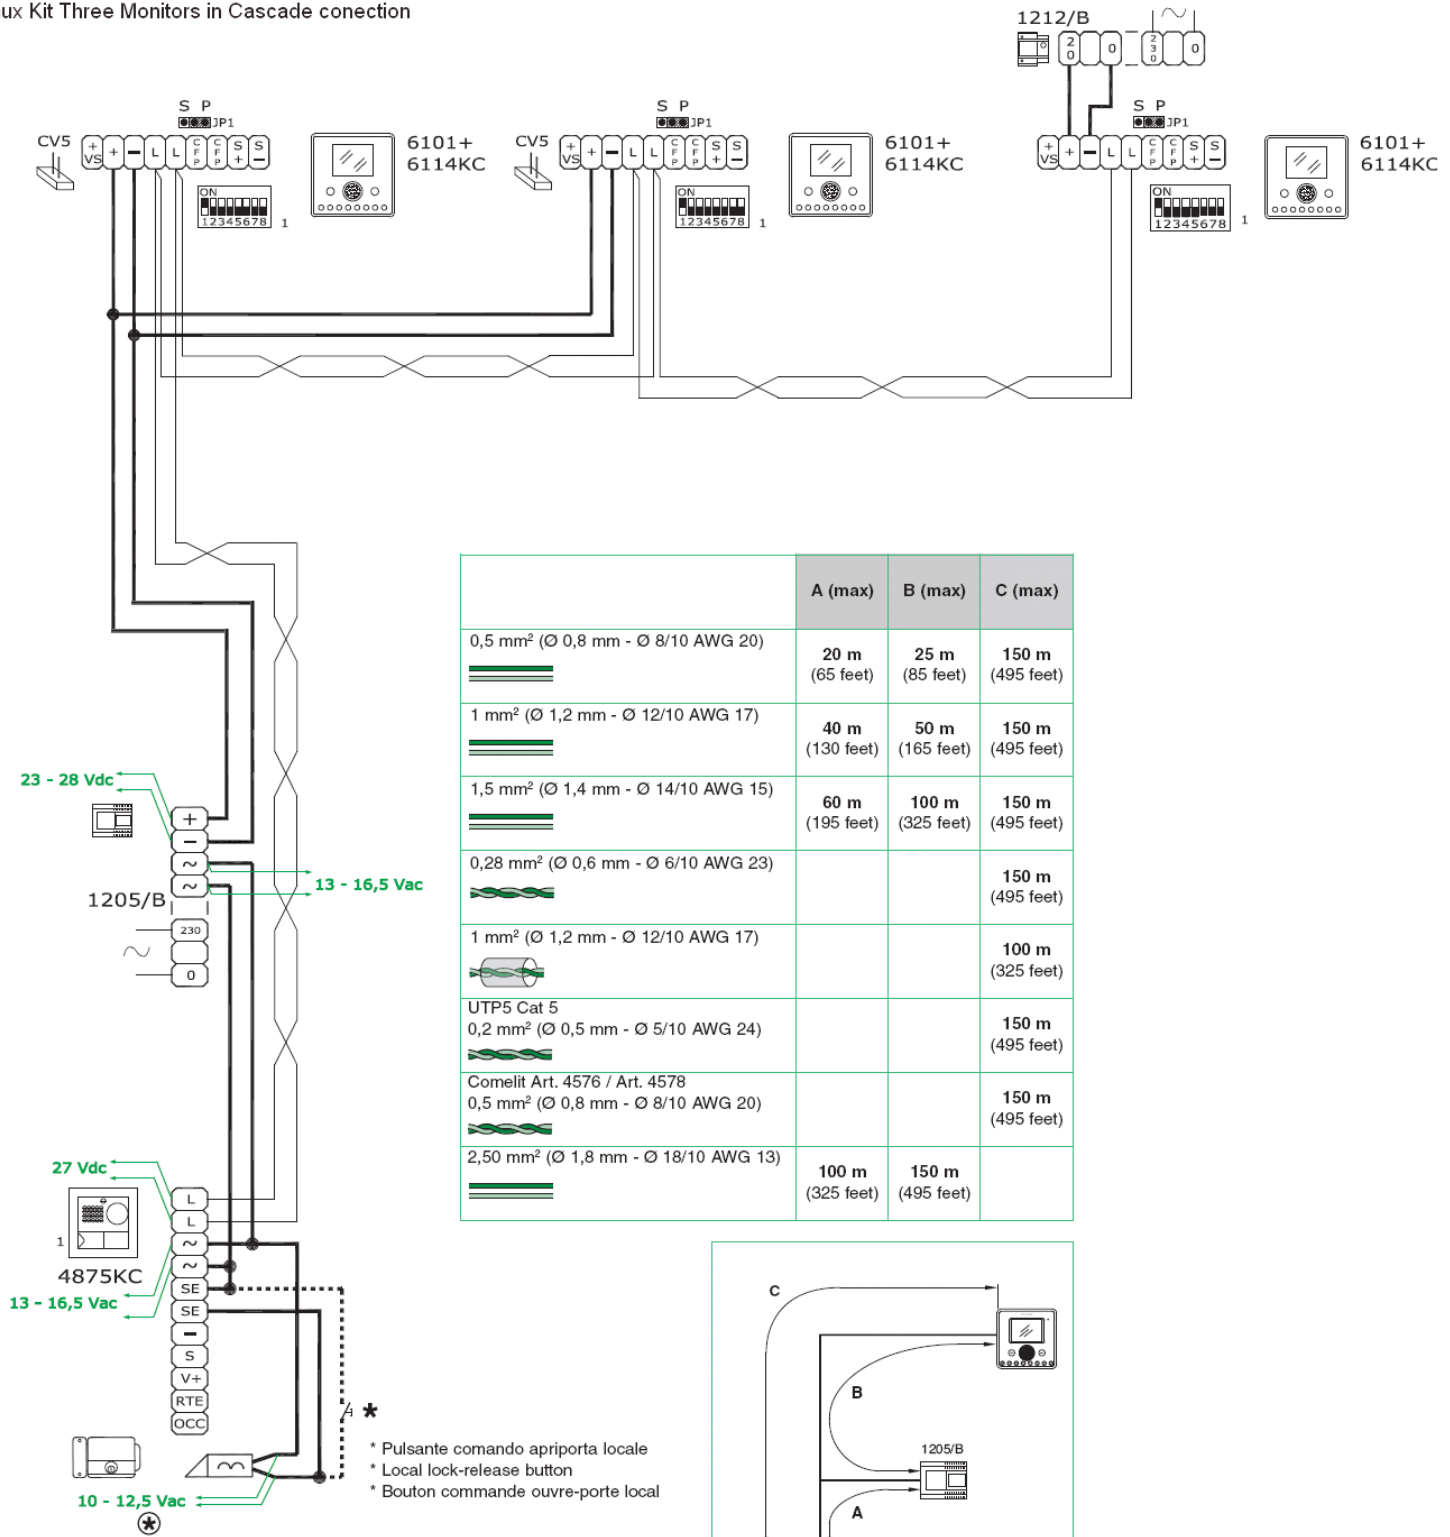

Durante l'attivazione  
 When switching on  
 Durant l'activation

	A (max)	B (max)	C (max)
0,5 mm <sup>2</sup> (Ø 0,8 mm - Ø 8/10 AWG 20)	20 m (65 feet)	25 m (85 feet)	150 m (495 feet)
1 mm <sup>2</sup> (Ø 1,2 mm - Ø 12/10 AWG 17)	40 m (130 feet)	50 m (165 feet)	150 m (495 feet)
1,5 mm <sup>2</sup> (Ø 1,4 mm - Ø 14/10 AWG 15)	60 m (195 feet)	100 m (325 feet)	150 m (495 feet)
0,28 mm <sup>2</sup> (Ø 0,6 mm - Ø 6/10 AWG 23)			150 m (495 feet)
1 mm <sup>2</sup> (Ø 1,2 mm - Ø 12/10 AWG 17)			100 m (325 feet)
UTP5 Cat 5 0,2 mm <sup>2</sup> (Ø 0,5 mm - Ø 5/10 AWG 24)			150 m (495 feet)
Comelit Art. 4576 / Art. 4578 0,5 mm <sup>2</sup> (Ø 0,8 mm - Ø 8/10 AWG 20)			150 m (495 feet)
2,50 mm <sup>2</sup> (Ø 1,8 mm - Ø 18/10 AWG 13)	100 m (325 feet)	150 m (495 feet)	

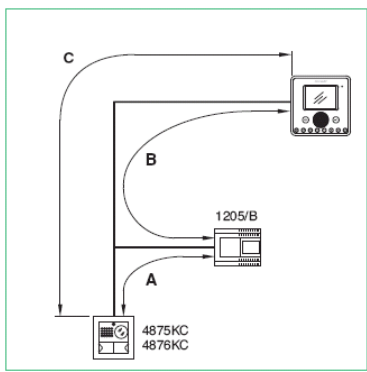

Per maggiori informazioni sulle distanze vedi Pag. 14 e 15  
 For further information on distances, see Page 32 and 33  
 Pour plus d'informations sur les distances, voir Pages 50 et 51