





## Features

- 4 outputs video amplifier;
- Two different modes: riser mode & distributor mode
- Built in short circuit indicator;
- Separate isolation protection in case of short circuit;
- Automatic self-check mechanism.

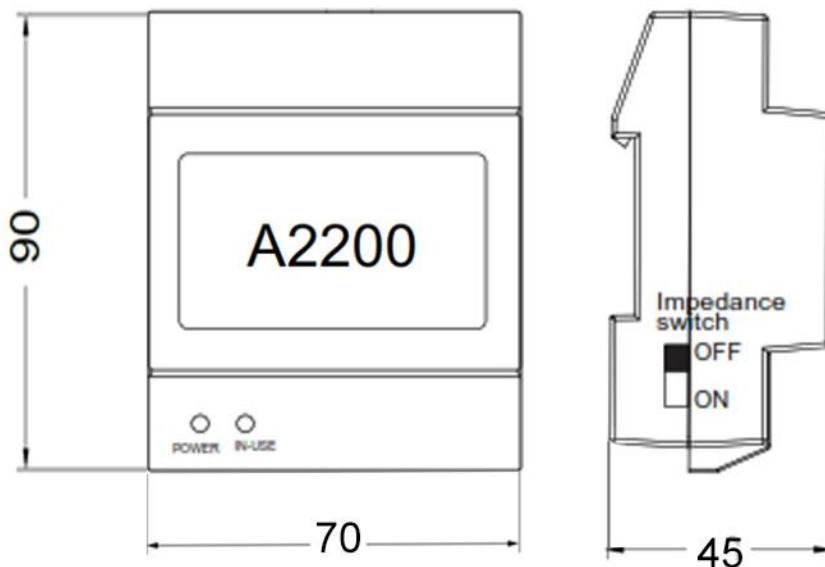

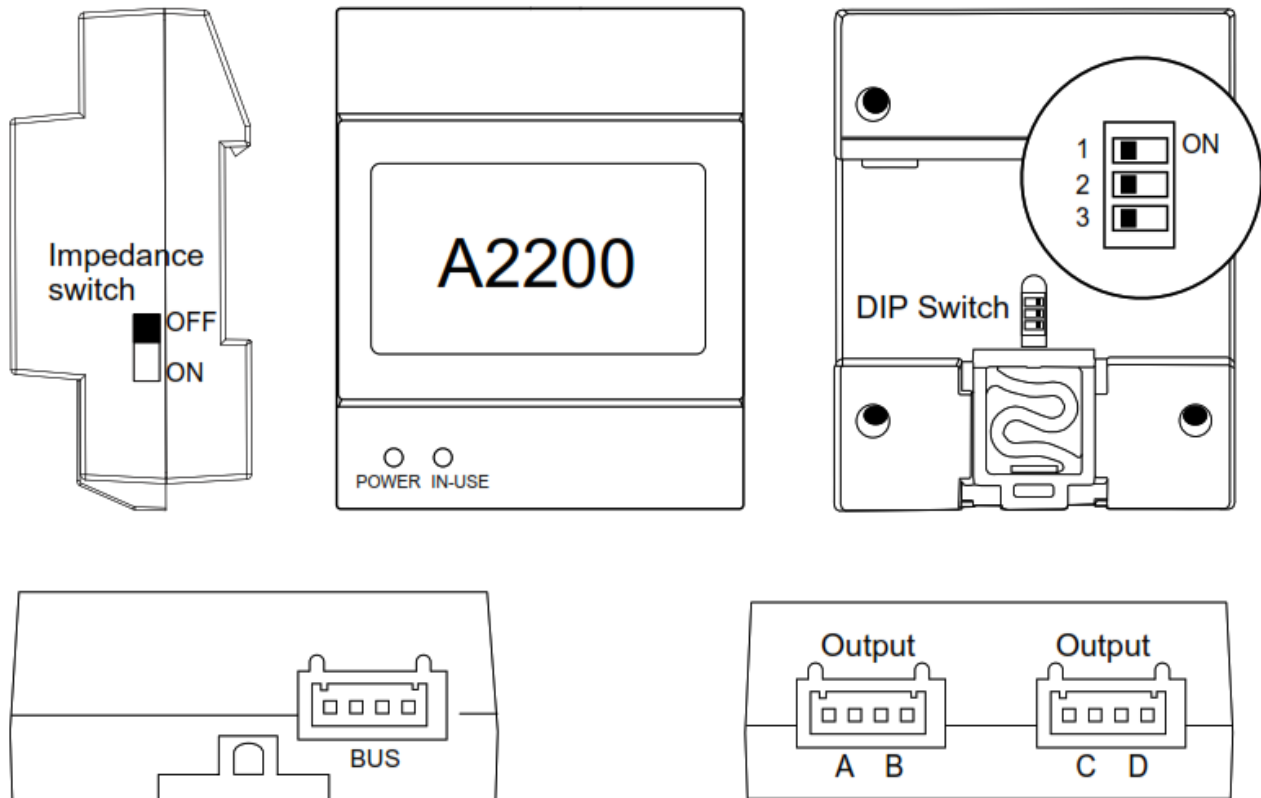

## Parts & Functions

- POWER: Video Sync indicator:
  - RED: Not Synced
  - ORANGE: Synced
- IN USE:
  - OFF: Standby
  - ON: Device is working
  - SLOW FLASH: Protection
  - FAST FLASH: Search mode
- DIP SWITCH 1
  - ON: Riser mode
  - OFF: Distributor mode
- DIP SWITCH 2
  - ON: Not in use (search address)
  - OFF: Default (end searching)
- DIP SWITCH 3
  - ON: Gain high
  - OFF: Gain auto
- IMPEDANCE SWITCH: Impedance setting
- BUS: Bus port connection
- ABCD: Outputs for monito connection

## Specification

- Voltage: DC 20V~30V±2V
- Working Temperature: -10C~+40C
- Standby current: 4mA~5mA
- Wiring: 2 wires non-polarized
- Dimension: 90\*70\*45mm (H\*W\*D)