




Features

- Acrylic front panel dot-matrix display
- Compatible with 125KHz RFID tags or cards
- Compatible with 13.56MHz RFID tags or cards
- Maximum 320 tags or cards

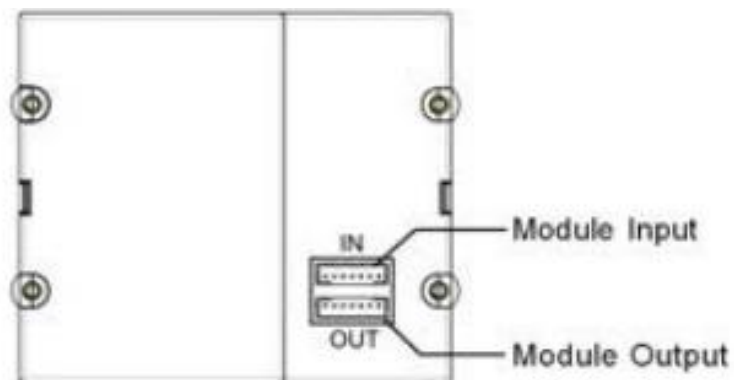

Parts & Functions

- IN: Module input connected to main OR last modules
- OUT: Connection to next module

Specification

- Voltage: DC 26V
- Working temperature: -20C~55C;
- Dimension: 83*82*38mm (H*W*D)