

Datasheet

DW-TLC-KIT - Toilet Door Locking Control Kit


Product Description

The DW-TLC is operated by two touch-sensitive sensors. It controls entry by locking and unlocking the door at the appropriate times, interfacing with both the automatic door operator and the locking device.

Entry: Touch the external sensor. The door opener activates to provide access.

Lock: Touch the internal sensor to lock the door. To confirm the door is locked, the LEDs on both sensors flash showing the toilet is engaged and inhibiting the entry sensor.

Exit: Touch the internal sensor again. The indicator stops flashing. The door unlocks and the door opener activates. The entry sensor stops flashing and can provide access again.

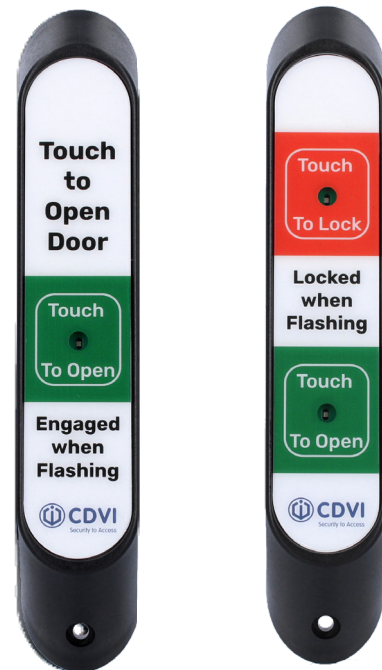

Key Features

- Accessible toilet locking control for door automation
- MicroGuard™ anti-microbial coating to help combat the spread of infections
- Locked or unlocked when vacant (set by DIP switch)
- False occupancy protection
- Impulse latch and release to aid in assisted usage (set by DIP switch)
- Standard door contact included

UK CA Certification

CE Certification

DEEE

RoHS Certification


IP IP65

Product Specifications

Material:	Glass filled nylon
Mounting:	Surface
Technology:	Touch-sensitive
DIP switches:	4
Relays:	1
Contacts:	NO/COM/NC
Outputs:	Key switch, lock, EDR
Weight:	0.23kg

Electrical Specifications

Power input:	7-30Vdc
Consumption:	27mA

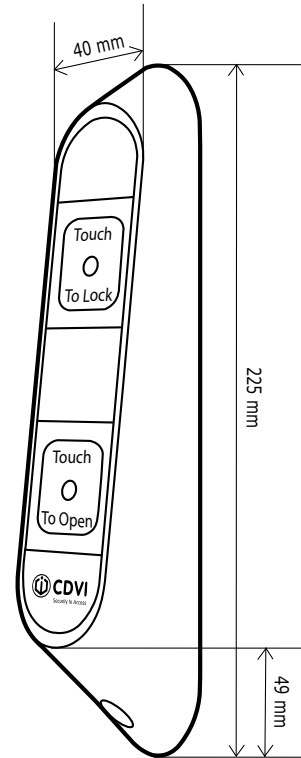

Kit References

Kit includes the parts below:

E0901D000554	DW-TLC	Includes touchless entry & exit sensors and controller (fitted in power supply)
F0301000015	PSMB123	Switch mode power supply, 12Vdc / 3A, small case
E0900000099	EM201	Double-pole resettable emergency door release
E0605000002	C3S11	Entry level surface 300kg magnetic lock, monitored
F0516000035	300-ZL	Z&L bracket for 300kg and 400kg magnetic locks
E0900D000033	KEY-ASMAKA	Surface architrave key switch, 2-position, maintained, keyed alike

Note: The kit doesn't include the DIGIWAY door operator.