




**UT8090S**

**WALL-MNT COMPLETE VIDEO+TOUCH ULTRA ENT.PAN., VIP**

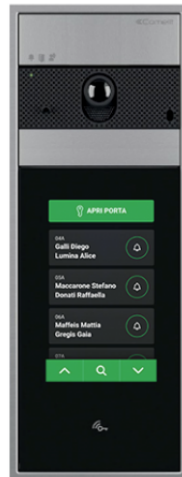

Ultra series surface-mounted audio/video entrance panel with 5" Touchscreen module for IP (ViP) system. Twilight sensor for touchscreen backlighting management. Omnidirectional digital microphone and double loudspeaker for high-fidelity audio. Wide-angle colour video camera with 160° horizontal, 100° vertical field of vision. Audio-visual indications for disabled individuals assistance request. 5" high-visibility capacitive display with impact-proof glass and theme selection (black or white). User-friendly graphic interface, can be customised with virtual call buttons or a number keypad to call the user directly when the code is known. Access control function with audio or audio/video module output and system actuator activation. Option of customising the buttons for direct calls to the switchboard, commercial activities with corresponding logos and viewing welcome messages. It has a Wiegand output for interfacing with access control systems, an RFID reader for activating an opening using keys or Comelit cards, and a Bluetooth connection. Consists of audio/video module art. UT8020, Touch module art. UT9270 and surface-mounted housing art. UT9173. Just 35 mm protrusion from the wall. Dimensions (L x H x D): 110x289x35 mm.

**AWARDS**



**UT8090S**

**WALL-MNT COMPLETE VIDEO+TOUCH ULTRA ENT.PAN., VIP**

DESIGN  
MILANO



**UT8090S**

**WALL-MNT COMPLETE VIDEO+TOUCH ULTRA ENT.PAN., VIP**

**GENERAL DATA**

Type	Modular
Height (mm)	317.5
Width (mm)	125.5
Depth (mm)	35
Product weight (g)	2000
Product color	Aluminium, Black RAL9005
Wall-mounted	Yes

**COMPATIBLE SYSTEMS**

ViP	Yes
-----	-----

**DISPLAY**

Display type	TFT
Display size (")	5
Touch screen	Yes, capacitive
Resolution (pixel)	800x480

**AUDIO FEATURES**

Microphone	MEMS audio digital sensor, omnidirectional
Loudspeaker	28mm (Ø), 8 Ohm, 1W (2)
Technologies implemented	Echo canceling
Audio compression	G.711 A-Law

**CAMERA FEATURES**

Camera	Colours
Sensor type	1/3" CMOS
Lens optical dimensions (mm)	2.5
Angle of view (H x V - °)	160 x 100
Video resolution (H x V - pixel)	320x240, 480x272, 800x480, 1024x608
Video compression	H.264 baseline



**UT8090S**

**WALL-MNT COMPLETE VIDEO+TOUCH ULTRA ENT.PAN., VIP**

**CAMERA FEATURES**

RTSP server	Yes
RTSP resolutions	1024x608, 800x480, 480x272, 320x240

**ELECTRICAL CHARACTERISTICS**

Type of power supply	PoE, External power supply
Supply voltage	33VDC
PoE power supply	Standard IEEE 802.3af, Comelit PoE (56VDC)
PoE class	Class 0
Absorption in stand-by (W)	7
Maximum absorption (W)	14

**HARDWARE FEATURES**

Call type	Push-buttons, Digital
Type of buttons	Capacitive
Backlight colour	White, Black
Clamps	RTE GND/SE- SE+ NO NC COM V- V+ - + TX- TX+ RX- RX+ D1+ D1- D2+ D2- GND D0 D1 GND IN
Number of inputs (n°)	1
Number of outputs (n°)	2
Type of outputs	Relay (C-NO-NC, 4A@12÷24 VAC/VDC, 10A peak), SE: unlock pulse of 4A, holding current of 200mA for 12VAC / DC locks (maximum impedance 18 Ohm)
Integrated proximity reader	RFID Mifare Classic
Communication ports	Micro-USB, 1 x Wiegand, 2 x RS485, Ethernet
Twilight sensor	Yes

**SETTINGS**

Loudspeaker volume	Yes
Microphone volume	Yes
Backlight brightness	Yes



**UT8090S**

**WALL-MNT COMPLETE VIDEO+TOUCH ULTRA ENT.PAN., VIP**

**NETWORK AND COMMUNICATION PROTOCOLS**

Type of LAN network	Ethernet 10 Mbit/s
IP address assignment	Auto IP, DHCP, Static
Bluetooth	Yes
Wiegand	Keypad: 4 bits for each digit, without parity, adding the "B" digit at the end. Comelit Cards/Keys: 26 bit
Protocols supported	DHCP, IPv4, NTP, RTSP, DNS, MQTTS

**PROGRAMMING MODE**

ViP Manager software	Yes
----------------------	-----

**ENVIRONMENTAL AND COMPLIANCE FEATURES**

IP protection rating	IP65
Vandal Resistant rating (IK code)	IK08
Operating temperature (°C)	-25 ÷ 55
Operating humidity (RH max) (%)	25 ÷ 95
Environmental class	IV
CE certifications	RoHS II - 2011/65/UE (EN IEC 63000:2018), RED 2014/53/UE (EN 60950-1:2006+A11:2009+A1:2010+A12:2011, +A2:2013, EN 62311:2008, EN 61000-6-1:2007, EN 61000-6-3:2007 + A1:2011, ETSI EN 301 489-1 V2.2.0, ETSI EN 301 489-17 V3.2.0, ETSI EN 300 328 V2.1.1)

**MAIN FUNCTIONS**

Door opener	Yes
Number of auxiliary relays (n°)	1
Input for local door release button	Yes
Door open signaling input	Yes
Access control via proximity reader	Yes
Access control via door opener code	Yes
No. of storable users (n°)	4000
Number of door opener codes (n°)	4000



**UT8090S**

**WALL-MNT COMPLETE VIDEO+TOUCH ULTRA ENT.PAN., VIP**

**MAIN FUNCTIONS**

Number of storable proximity keys	4000
Visual indications of system status	Yes
Acoustic signals of system status	Yes
Speech synthesis of system status	Yes
Customizable welcome message	Yes
	Yes
Customisable image of the button	Yes

**GENERAL FEATURES**

Switchboard call function	Yes
Actuator control function	Yes