




# ARCHITECTURAL DOOR HANDLE RANGE


MAGNETIC LOCK




**DHM600**



**DHM600**



**DHM600-60**

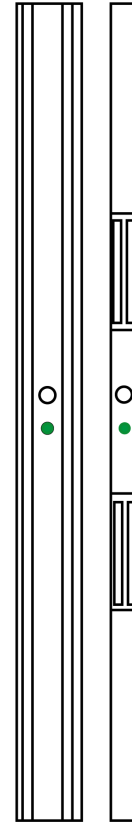

**DHM600-200**

## SPECIFICATION

- DHM600, DHM600-60 + DHM600-200
- Aluminium housing
  - 12/24VDC @ 450/265mA
  - 1 x 280kg (600lb) holding force
  - Built in surge protection
  - Monitored (door open or door closed detection)
  - Suitable for 90 degree wooden or aluminium doors
  - Delay timer 0/2.5/5/9 seconds
  - Built in exit button
  - Visible LED indication

- DHM600-60 + DHM600-200
- 12/24VDC @ 920/460mA
  - 2 x 280kg (600lb) holding force

## DIMENSIONS

**DHM600**  
300 x 92 x 58mm / 274 x 46.2 x 30mm  
3kg

**DHM600-60**  
600 x 92 x 58mm / 575 x 46.2 x 30mm  
6kg

**DHM600-200**  
1980 x 92 x 58mm / 1955 x 46.2 x 30mm  
13.5kg

## FEATURES

- DHM600, DHM600-60 + DHM600-200
- Slimline monitored magnet
  - Built in exit button
  - Built in timer delay
  - No residual magnetism
  - Install at centre of door leaf to prevent distortion

## CONTENTS

- DHM600, DHM600-60 + DHM600-200
- Magnetic Lock
  - Door Handle with built in armatures
  - Fixing Kit
  - Fixing template

## OTHER PRODUCTS

**EDR-N**



**120ISM-1**



**ML600-MDS**



**EXT-AP-KS3**

