




**2735**

## Ch. repeat. card+Mini HS door-entry phone button

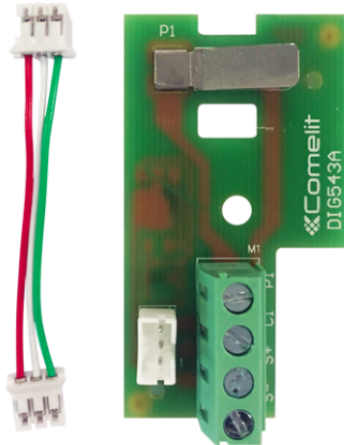

Additional board for door-entry phones art. 2708W/A and 2738W/A for call repetition and for an additional button with voltage free contacts. Cable for connection to the main board and fixing screws provided.



**2735**

## Ch. repeat. card+Mini HS door-entry phone button

### MAIN FEATURES

Operating temperature (°C)	5 ÷ 40
Max/min absorption (mA)	0 ÷ 25
Contact range	100mA@24VDC
Operating humidity (RH max) (%)	0 ÷ 90