




IPSWP06N02A

4 PORT SWITCH POE + 2 SFP DIN MOUNTING Gbit

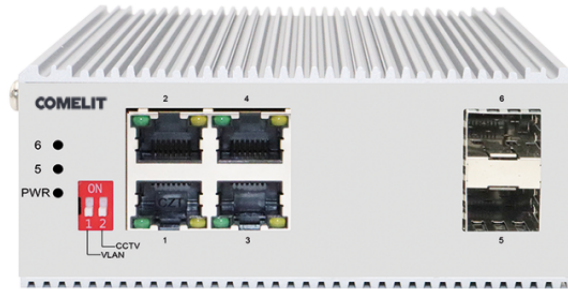

Network switch with 4 PoE ports + 2 gigabit SFP. DIN rail mounting Recommended power supply ART. PS4825A NOTE: compatible with the ViP system

AWARDS





IPSWP06N02A

4 PORT SWITCH POE + 2 SFP DIN MOUNTING Gbit

MAIN FEATURES

LAN ports	4 (10/100/1000 Mbit/s, auto MDI/MDI-X)
Standard IEEE802.3	IEEE802.3u/ab/z, IEEE802.3x (full-duplex)/back pressure (half-duplex)
LAN PoE ports	4 (10/100/1000 Mbit/s), 48 VDC (32W max), standard IEEE802.3af/at
SFP ports	2 (10/100/1000 Mbit/s)
Transfer method	Store and forward
Exchange capacity (Gb/s) (Gb/s)	12
MAC address	4K, auto-learning, auto-update
Frame Filtering and Forward Rate	8.9 Mpps max
Jumbo frame 9K management	Yes
Long range	Yes
Maximum distance in long range mode (CAT5e/CAT6) (m)	250

GENERAL DATA

Max absorption (W)	65
Supply voltage	48VDC
Height (mm)	54
Width (mm)	165
Depth (mm)	147
Type of finishing materials	Metallic
Product color	Black
Operating temperature (°C)	-40 ÷ 75
Operating humidity (RH max) (%)	25 ÷ 90

CONNECTIVITY

RJ45 ports (n°)	4
-----------------	---



IPSWP06N02A

4 PORT SWITCH POE + 2 SFP DIN MOUNTING Gbit

ACCESSORIES



PS4825A POWER SUPPLY UNIT 48V 2.5A DIN RAIL

Power supply unit with DIN rail mounting. Input 90-264 VAC, output 48 VDC/2.5A (120 W).