




IX0226

SWITCH FRONT PLATE WITH 26 BUTTONS - 2 COLUMNS

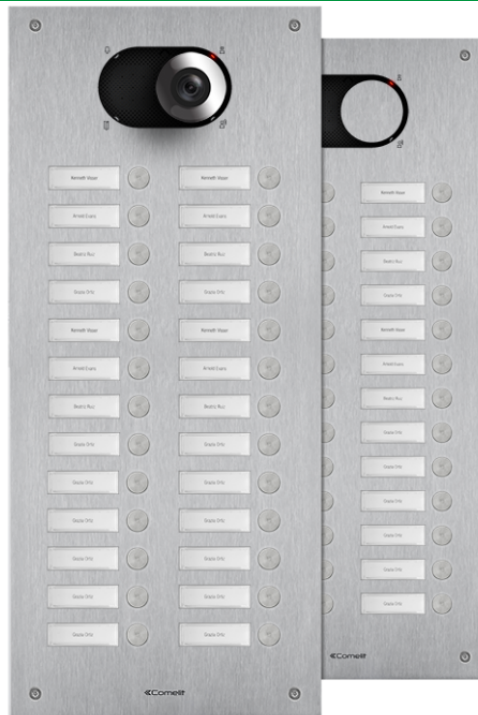

Front plate for Switch entrance panel in 2.5 mm thick brushed AISI 316 stainless steel. Adapter art. 1250U (supplied) offers the option of using the audio or audio/video module - not supplied - depending on the type of wiring applied (Simplebus digital 2-wire or ViP). Complete with 26 pre-fitted, pre-wired buttons, arranged in 2 columns. White LED nameplate backlighting. Nameplate replacement from the front. Protection rating IK08. To be finished with flush-mounted box or surface-mounted casing (not supplied). Dimensions (L x H x P): 216.4 x 502.1 x 2.5 mm.

AWARDS

DESIGN
MILANO



IX0226

SWITCH FRONT PLATE WITH 26 BUTTONS - 2 COLUMNS

GENERAL DATA

| | |
|---------------|---------------------------------|
| Type | Modular |
| Height (mm) | 502.1 |
| Width (mm) | 216.4 |
| Depth (mm) | 2.5 |
| Product color | Steel |
| Flush-mounted | Yes, with a dedicated accessory |
| Wall-mounted | Yes, with a dedicated accessory |

COMPATIBLE SYSTEMS

| | |
|---|--|
| Compatible audio and audio/video units | Art.1682, Art.1682HVC, Art.4682HD, Art.1621, Art.1622, Art.1622VC, Art.4680C, Art.4681 |
| Audio/video Simplebus 2 with power supply art. 4888C | Yes |
| Audio/video Simplebus 2 with power supply art. 1210/1210A | Yes |
| Simplebus 2 audio/video kit with power supply art. 1209 | Yes |
| Audio Simplebus 2 with power supply art. 1210/1210A | Yes |
| Audio Simplebus 1 | Yes |
| ViP | Yes |

AUDIO FEATURES

| | |
|--------------------------|----------------|
| Technologies implemented | Echo canceling |
|--------------------------|----------------|

HARDWARE FEATURES

| | |
|-----------------------------|--------------|
| Call type | Push-buttons |
| Type of buttons | Mechanical |
| Number of push-buttons (n°) | 26 |
| Backlight colour | White |



IX0226

SWITCH FRONT PLATE WITH 26 BUTTONS - 2 COLUMNS

ENVIRONMENTAL AND COMPLIANCE FEATURES

| | |
|-----------------------------------|----------|
| IP protection rating | IP54 |
| Vandal Resistant rating (IK code) | IK08 |
| Operating temperature (°C) | -25 ÷ 55 |
| Operating humidity (RH max) (%) | 25 ÷ 95 |
| Environmental class | III |



IX0226

SWITCH FRONT PLATE WITH 26 BUTTONS - 2 COLUMNS

ACCESSORIES



IX9164 HOUSING FOR FRONT PANELS 20-26 BUTTONS W/SHIELD

Surface-mounted casing for entrance panels art. IX0220, IX0222, IX0224 and IX0226 with 20-22-24-26 buttons.



IX9154 FLUSH-MOUNTED BOX FRONT PANEL WITH 20-26 BUTTONS

Flush-mounted box for entrance panels art. IX0220, IX0222, IX0224 and IX0226 with 20-22-24-26 buttons. Dimensions: 190.4x476.1x56 mm.