




IX0560

SWITCH FRONT PANEL WITH 60 BUTTONS - 5 COLUMNS

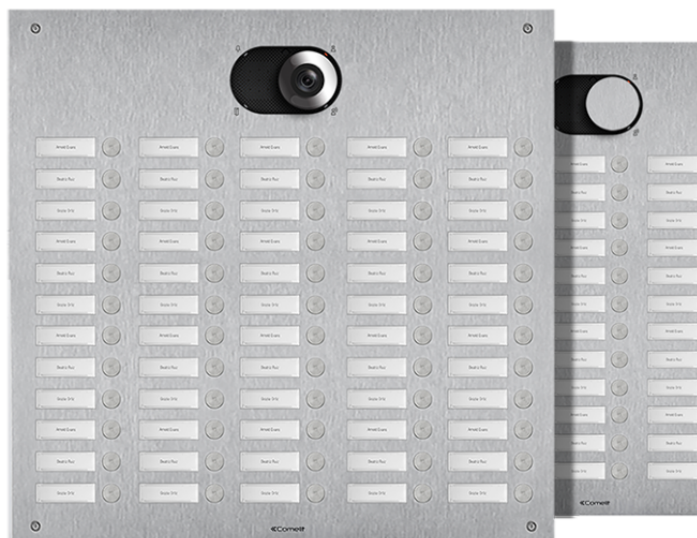

Front plate for Switch entrance panel in 2.5 mm thick brushed AISI 316 stainless steel. Adapter art. 1250U (supplied) offers the option of using the audio or audio/video module (not supplied), depending on the type of wiring applied (Simplebus digital 2-wire or ViP). Complete with 60 pre-fitted, pre-wired buttons arranged in 5 columns. White LED nameplate backlighting. Nameplate replacement from the front. IK08 protection rating. To be finished with flush-mounted box or surface-mounted casing (not supplied). Dimensions (L x H x D): 495 x 502.1 x 2.5 mm.

AWARDS

DESIGN
MILANO



IX0560

SWITCH FRONT PANEL WITH 60 BUTTONS - 5 COLUMNS

GENERAL DATA

Type	Monoblock
Height (mm)	502.1
Width (mm)	495
Depth (mm)	2.5
Product color	Steel
Flush-mounted	Yes, with a dedicated accessory
Wall-mounted	Yes, with a dedicated accessory

COMPATIBLE SYSTEMS

Compatible audio and audio/video units	Art.1682, Art.4682HD, Art.1621, Art.1622, Art.4680C, Art.4681
Audio/video Simplebus 2 with power supply art. 4888C	Yes
Audio/video Simplebus 2 with power supply art. 1210/1210A	Yes
Simplebus 2 audio/video kit with power supply art. 1209	Yes
Audio Simplebus 2 with power supply art. 1210/1210A	Yes
Audio Simplebus 1	Yes
ViP	Yes

HARDWARE FEATURES

Call type	Push-buttons
Type of buttons	Mechanical
Number of push-buttons (n°)	60
Backlight colour	White

ENVIRONMENTAL AND COMPLIANCE FEATURES

IP protection rating	IP54
Vandal Resistant rating (IK code)	IK08



IX0560

SWITCH FRONT PANEL WITH 60 BUTTONS - 5 COLUMNS

ENVIRONMENTAL AND COMPLIANCE FEATURES


Operating temperature (°C)	-25 ÷ 55
Operating humidity (RH max) (%)	25 ÷ 95
Environmental class	III



IX0560

SWITCH FRONT PANEL WITH 60 BUTTONS - 5 COLUMNS

ACCESSORIES



IX9182 FLUSH-MOUNTED BOX FOR FRONT PANEL W/ 55-60-65

Flush-mounted box for Switch front panels art. IX0555, IX0560, IX0565 with 55-60-65 buttons, galvanised steel finish. Dimensions (L x H x D): 469 x 476 x 56 mm.