


**UT2090S****WALL-MNT COMPLETE VIDEO+TOUCH ULTRA ENT.PAN., SB2**

Ultra series surface-mounted audio/video entrance panel with 5" Touchscreen module for Simplebus 2 system. For use in systems with power supply unit art. 1210 / 1210A. Twilight sensor for touchscreen backlighting management. Omnidirectional digital microphone and double loudspeaker for high-fidelity audio. Wide-angle colour video camera with 120° horizontal, 90° vertical field of vision. Audio-visual indications for disabled individuals assistance request. 5" high-visibility capacitive display with impact-proof glass and theme selection (black or white). User-friendly graphic interface, can be customised with virtual call buttons or a number keypad to call the user directly when the code is known. Access control function with audio or audio/video module output and system actuator activation. Option of customising the buttons for direct calls to the switchboard, commercial activities with corresponding logos and viewing welcome messages. It has a Wiegand output for interfacing with access control systems, an RFID reader for activating an opening using keys or Comelit cards, and a Bluetooth connection. Consists of audio/video module art. UT2020, Touch module art. UT9270 and surface-mounted housing art. UT9173. Just 35 mm protrusion from the wall. Dimensions (L x H x D): 110x289x35 mm.

AWARDS

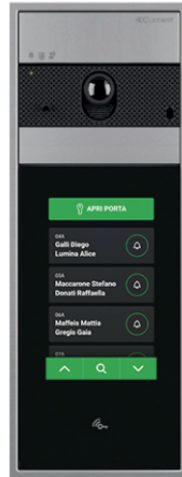

UT2090S

WALL-MNT COMPLETE VIDEO+TOUCH ULTRA ENT.PAN., SB2

DESIGN
MILANO





UT2090S

WALL-MNT COMPLETE VIDEO+TOUCH ULTRA ENT.PAN., SB2

GENERAL DATA

Type	Modular
Height (mm)	317.5
Width (mm)	125.5
Depth (mm)	35
Product weight (g)	2000
Product color	Aluminium, Black RAL9005
Wall-mounted	Yes

COMPATIBLE SYSTEMS

Audio/video Simplebus 2 with power supply art. 1210/1210A	Yes
---	-----

DISPLAY

Display type	TFT
Display size (")	5
Touch screen	Yes, capacitive
Resolution (pixel)	800x480

AUDIO FEATURES

Microphone	MEMS audio digital sensor, omnidirectional
Loudspeaker	28mm (Ø), 8 Ohm, 1W (2)
Technologies implemented	Echo canceling

CAMERA FEATURES

Camera	Colours
Sensor type	1/3" CMOS
Lens optical dimensions (mm)	1.79
Angle of view (H x V - °)	120 x 90
Sensitivity	0.45



UT2090S

WALL-MNT COMPLETE VIDEO+TOUCH ULTRA ENT.PAN., SB2

ELECTRICAL CHARACTERISTICS

Type of power supply	Power supply from video door entry bus
Supply voltage	33VDC
Absorption in stand-by (W)	4.5
Maximum absorption (W)	9.5

HARDWARE FEATURES

Call type	Push-buttons, Digital
Type of buttons	Capacitive
Backlight colour	White, Black
Clamps	L L V+ V- COM NC NO SE+ SE-/GND RTE TX- TX+ RX- RX+ D1+ D1- D2+ D2- GND D0 D1 GND IN
Number of inputs (n°)	1
Number of outputs (n°)	2
Type of outputs	Relay (C-NO-NC, 4A@12+24 VAC/VDC, 10A peak), SE: unlock pulse of 4A, holding current of 200mA for 12VAC / DC locks (maximum impedance 18 Ohm)
Integrated proximity reader	RFID Mifare Classic
Communication ports	Micro-USB, 1 x Wiegand, 2 x RS485, Ethernet
Twilight sensor	Yes

SETTINGS

Loudspeaker volume	Yes
Microphone volume	Yes
Backlight brightness	Yes

NETWORK AND COMMUNICATION PROTOCOLS

Type of LAN network	Ethernet 10 Mbit/s
Web page	HTTP
Bluetooth	Yes



UT2090S

WALL-MNT COMPLETE VIDEO+TOUCH ULTRA ENT.PAN., SB2

NETWORK AND COMMUNICATION PROTOCOLS

Wiegand	Access codes: 26 bits max (4 bits for each digit, 2 parity bits, big endian). Comelit Cards/Keys: 34 bits max (32 payload bits, 2 parity bits, big endian)
---------	--

PROGRAMMING MODE

ViP Manager software	Yes
----------------------	-----

ENVIRONMENTAL AND COMPLIANCE FEATURES

IP protection rating	IP65
Vandal Resistant rating (IK code)	IK08
Operating temperature (°C)	-25 ÷ 55
Operating humidity (RH max) (%)	25 ÷ 95
Environmental class	IV
Certifications	RoHS II - 2011/65/UE (EN IEC 63000:2018), RED 2014/53/UE (EN 62311:2008, EN 62368-1:2014, EN 61000-6-1:2007, EN 61000-6-3:2007 + A1:2011, ETSI EN 301 489-1 V2.2.0, ETSI EN 301 489-17 V3.2.0, ETSI EN 300 328 V2.1.1)

MAIN FUNCTIONS

Door opener	Yes
Number of auxiliary relays (n°)	1
Input for local door release button	Yes
Door open signaling input	Yes
Access control via proximity reader	Yes
Access control via door opener code	Yes
No. of storable users (n°)	4000
Number of door opener codes (n°)	4000
Number of storable proximity keys	4000
Visual indications of system status	Yes
Acoustic signals of system status	Yes
Speech synthesis of system status	Yes



UT2090S

WALL-MNT COMPLETE VIDEO+TOUCH ULTRA ENT.PAN., SB2

MAIN FUNCTIONS

Customizable welcome message	Yes
	Yes
Customisable image of the button	Yes

GENERAL FEATURES

Switchboard call function	Yes
Actuator control function	Yes