


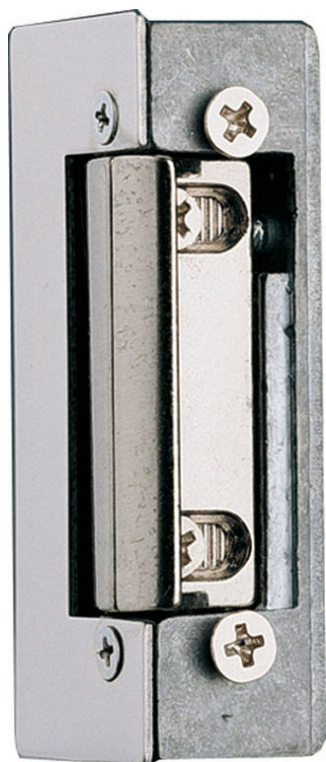

Product Code

F01778

## ELECTRIC STRIKE 540A MAX

Reference

1778

EAN

8424299017785

### Description.

---

Description

#### Operating type.

There are several types of door lock release mechanisms depending on the type of operation needed.

**Type A Automatic 12Vac** (Automatic operation and 12 Vac activation).

The lock release is unblocked when it receives a 12Vac voltage pulse. The lock release is blocked again once the voltage is cut off and the door opens and closes again mechanically. For proper installation, the automatic lock pin must be pressed in 3mm by the latch once the door is closed again.

**Reversible (Right DIN or Left DIN).**

Lets you open the door from right and left.

**Symmetrical.**

Allows to change hands, maintaining the body symmetry.

**DIN STANDARD**

establishes the direction the door opens and designates the type of lock release installed.

Looking at the door from the side with the hinges visible:

- If the hinges are to the left of the observer, it is a left DIN lock release.
- If the hinges are on the observer's right, it is a right DIN.

#### Max Adjustable Latch:

The lock release includes an adjustable latch, allowing a perfect fit between latch and deadbolt in the lock, with a 4mm margin. It avoids door leaf pressure on the lock release latch bolt.

#### Technical Details

##### Consumption:

N, At 12Vac: 560mA

N-412 12Vdc: 260mA.

N-424 24Vdc: 180mA.

N-512 12Vdc: 200mA.

N-524 12Vdc: 120mA.

##### Dimensions:

540 series, 67(V)mmx20.5(H)mmx28(P)mm

**MAX Adjustable Latch:** 3mm

#### Details.

| Weight (kg) | Packaging measurements<br>(height x width x depth) cm | Video Door Entry system<br>Technologie |
|-------------|-------------------------------------------------------|----------------------------------------|
| 0.166       | 2,7x10,2x3,2                                          | GENERICA                               |