
REF. 5280 CENTRAL CONTROLLER IP_AXES 1/2+

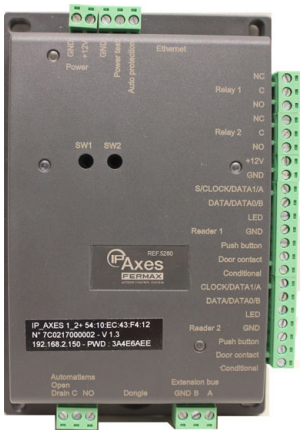

Dimensions(width,height, depth) :120x160x30mm

New ON-LINE access control unit. Expandable with connecting expansion modules and managed by the IP Axes software via TCP/IP.

· ONLINE Access control central.
· Requires 12Vdc.
· PC connection via TCP/IP.
. DIN Modules
· RS485 connection expansion modules.
· Until 64 stations AXIS IP networked.
· 2 Readers.
· 3 outputs: 2 for readers, 1 for automation. 12V/ 1A
· 50.000 users.
· 15.000 events.
· 128 time zones.
· 64 automation.
· Removable memory, not compatible with the Soft-UserPlus.
· IP address integrated in the computer.
· Protocols readers: S-BUS, Wiegand y Clock&amp,Data.

Software

· Management software compatible with Windows XP, VISTA, 7, 8, 10 a 32/64 bits.
· TCP/IP communication with central access control.
· Languages: Spanish, English, French, Dutch, German, Russian.
· Installation and user creation Wizard.
· Databases: Access and SQL Server.
· 2 working modes: ONLINE, OFFLINE (autonomous) with the following functions:
- Antipassback local/global.
- Downcounting.
- Mail alerts.
- Accompanying Management.
- Automations.
- Elevator management.
· Map display in real-time and remote control status:

FERMAX ® is a registered trademark. All intellectual property and license rights reserved.

ACCESORIES



4813 P.S.U. DIN6 100-240VAC/12VDC-2A
Used to power the different equipment in a Fermax installation.



5281 EXPANSION IP_AXES 4
4-door expansion module that allows connection to a central unit via RS-485, to expand the number of doors. A license must be available to manage all the doors. Maximum 10 expanders per central 5280.



5282 EXPANSION IP AXES I/O
Includes 8 sensor inputs and 8 relay outputs. Necessary for elevator management.



5283 IP_AXES 10 READERS LICENSE
Required when adding an additional module to an IP_AXES central unit. It plugs into the central unit and manages up to 10 readers. It is possible to add more licenses if there are more central units.

TECHNICAL DETAILS

Dimensions(width,height, depth) :120x160x30mm
Standby consumption: 300 mA
Maximum consumption: 300 mA
Operating System: [-20ºC,50ºC]
Power Supply: 12-24VCC

SPECIFICATIONS

Access Control System: IP AXES
Nº máximo de lectores conectados a central/controlador: 2
Mounting: Carril DIN 9
Nº máximo usuarios del sistema ONLINE: 50.000
Nº máximo de eventos de la unidad central (memoria): 15000
Nº máximo usuarios OFFLINE (por unidad central/controlador): 50
Programación: Con SW de PC
Licencias por puerta lector o usuarios: Yes
Nº de controladores esclavos por central: 10
Conectividad lectores: Wiegand 26
Setup wizards: Yes
Mapa visual: Yes
Integración CCTV: Yes
Códigos temporales: Yes

FERMAX ® is a registered trademark. All intellectual property and license rights reserved.