



## ■ PRODUCT DRAWING

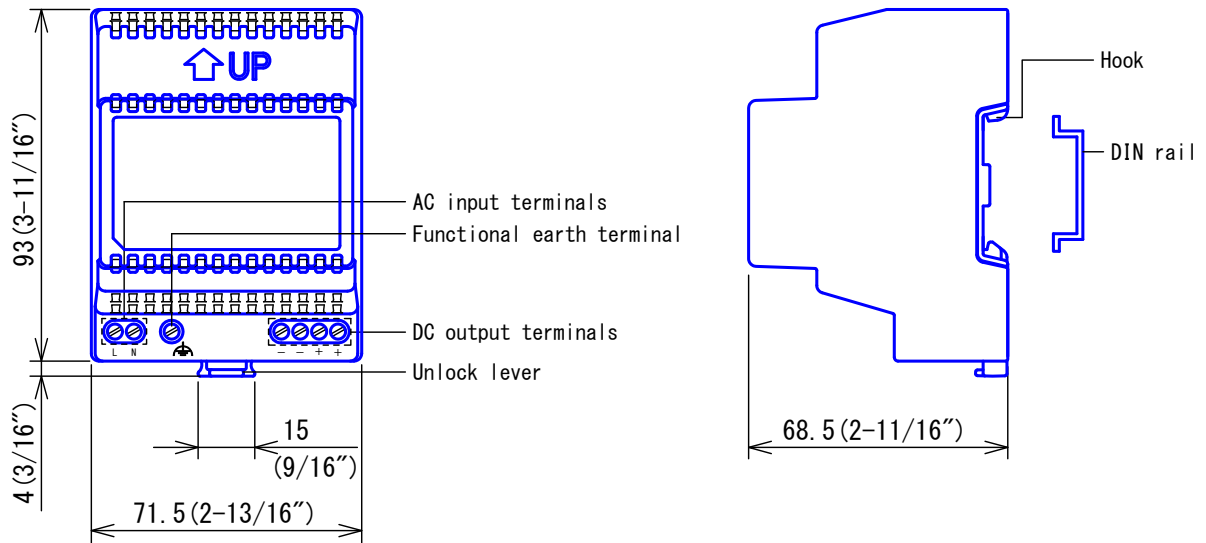

## ● MOUNTING

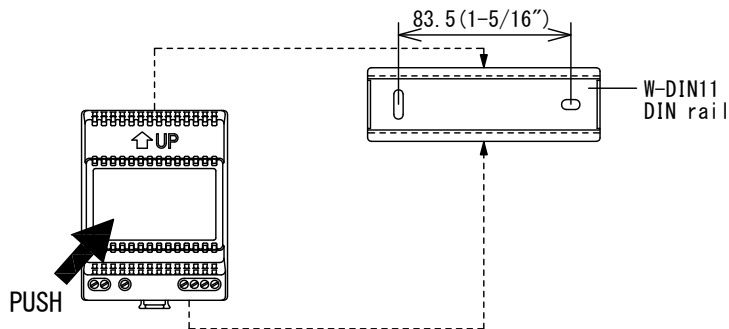

Mount DIN rail to wall board inside an electrical enclosure.  
Attach PS-2410DM to DIN rail aligning at the hook and pushing bottom until it clicks to lock.

## ■ RESTRICTIONS

- Do not connect any power source other than specified to +, -, nor install two power supplies in parallel to single input. Doing so may cause fire or damage the unit.
- Power supply shall be located not more than specified wiring distance for each system.

## ■ SPECIFICATIONS

Power source	AC 230V, 50/60Hz.
Power consumption	53.56W
Secondary output voltage	DC 24V
Secondary output current	2.0A
Housing	Self-extinguishing ABS plastic
Weight	Approx. 220g (0.485 lbs)
Ambient temperature	0~40°C (32~104° F)
Mounting	DIN rail

DESCRIPTION POWER SUPPLY (24V DC, 2.0A)	FIG. NAME PRODUCT/RESTR./SPEC.	UNIT mm	DATE 4 December, 2017
MODEL NO. PS-2420DM	FIG. NO. P60501-1-1	PAGE 1/1	REVISION 1

**AIPHONE**