


**SK9030I****PANEL MOUNT READER**

Mifare® reader to insert into Comelit housing. Watertight PVC housing. 2 operation LEDs. Connected to management unit by 2 wires + power supply. Maximum range 1000 m. Wiegand output for use with non-Comelit management modules. 12VDC power supply. Dimensions: 63x108x23mm. To be completed with SK9020 control unit.

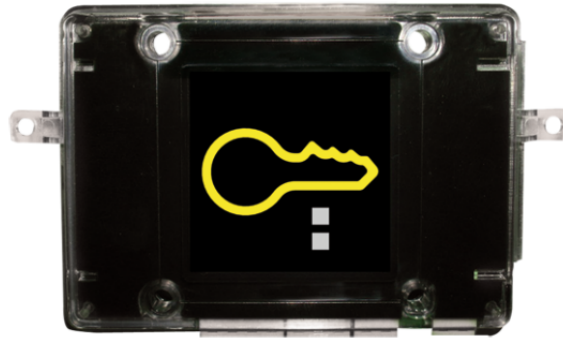

SK9030I

PANEL MOUNT READER

COMPATIBILITY

Access Control system

Yes