

Audio entry system





KIT audio entry control systems AKW200/201

2 wire audio entry control kit, for detached and semi-detached homes. The kit allows you to create an audio entry control system with up to two calls with secrecy of speech, intercom function and the option to expand the system by up to 4 internal handsets.



The audio entry control kit includes a handset with two buttons, one to open the door and the other for an additional command. Possibility to reduce call volume.

The entry panel is a surface mount unit with a single call button able to serve one or two residences, depending on the system configuration (fig. The call button is back-lit with a green LED light.





The power supply unit is equipped with a rectifier that provides continuous voltage of 18 V - 9 VA and is thermally and electronically protected against overloads and short circuits.



Power supply

2 kits available, either with or without power supplier

The power supply can be connected directly to the entry panel or to the handset.




AKW200 audio kit with power supplier Code 61721900









AKW201 audio kit without power supplier Code 61722000





Intercommunication






The kit is set up for intercommunication between internal extensions, either all together or in two groups as in a semi-detached house or apartments, with secrecy of speech without requiring additional wiring or accessories.






Expandability





AUDIO KIT






A) Example of an expansion in a single dwelling

B) Example of an expansion in a semi-detached home

Technical information

Table of distances with power supplier included

Wire cross-section	A	В	С
>0,22 mm ²	100 m		
0,5mm ²	150 m		
1 mm ²		25 m	50 m

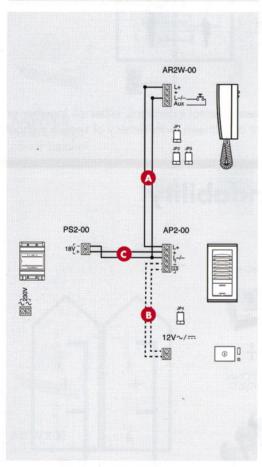

Product dimension





