





INSTALLATION INSTRUCTIONS FOR MANUAL CALL POINT MODEL D115 (RESETTABLE)

CONNECTION DETAILS

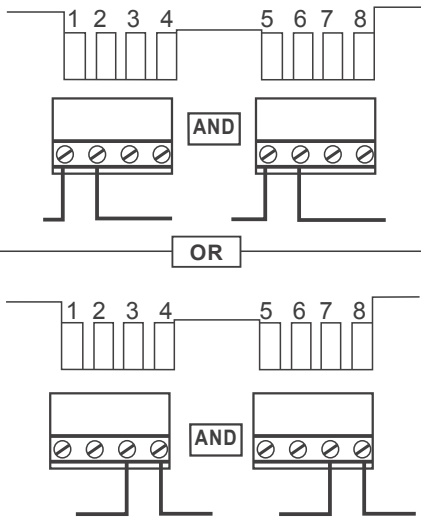


PUSH FIT CONNECTOR

After wiring the terminal connector, plug into the appropriate position, see connection details (left).

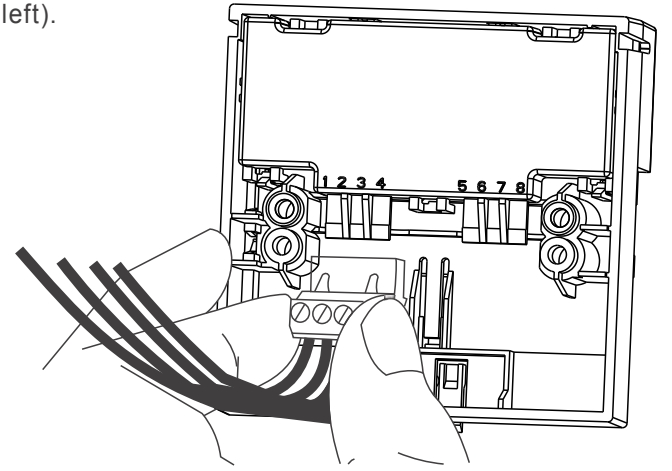

DIMENSIONS

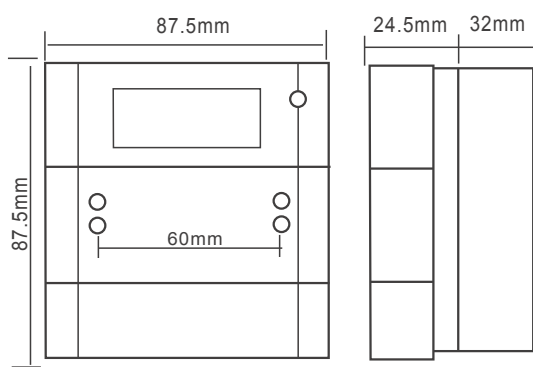

TECHNICAL DATA

- 30VDC Max
- 2A Max
- IP24D
- 110/160g

- 30 °C to 70 °C
- Green, RAL 6016




Unit 1, AMC Business Park, 12 Cumberland Avenue, Park Royal, London, NW10 7QL.


www.doentrydirect.com

INSTALLATION INSTRUCTIONS FOR MANUAL CALL POINT MODEL D115 (RESETTABLE)

DIMENSIONS

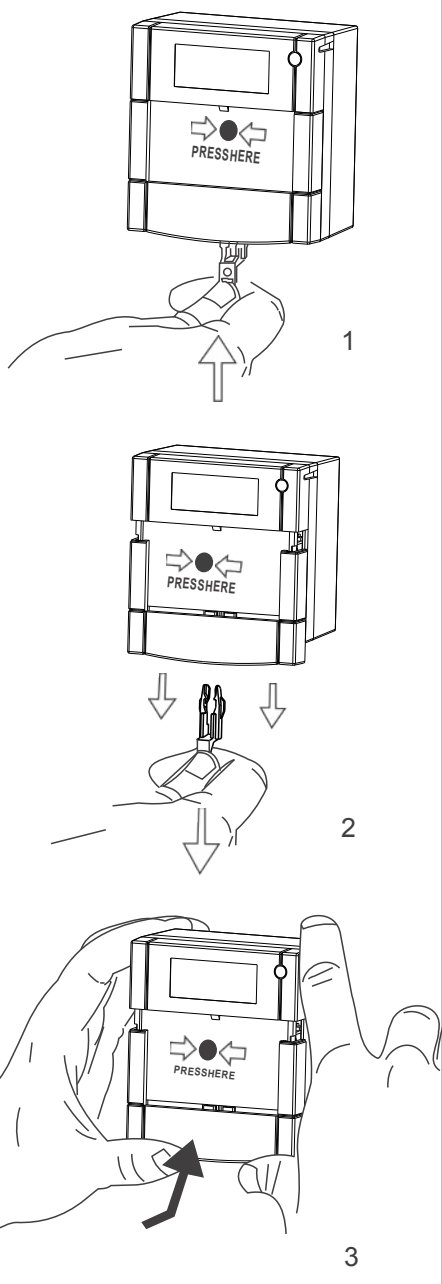

TO REPLACE GLASS / RESETTABLE ELEMENT

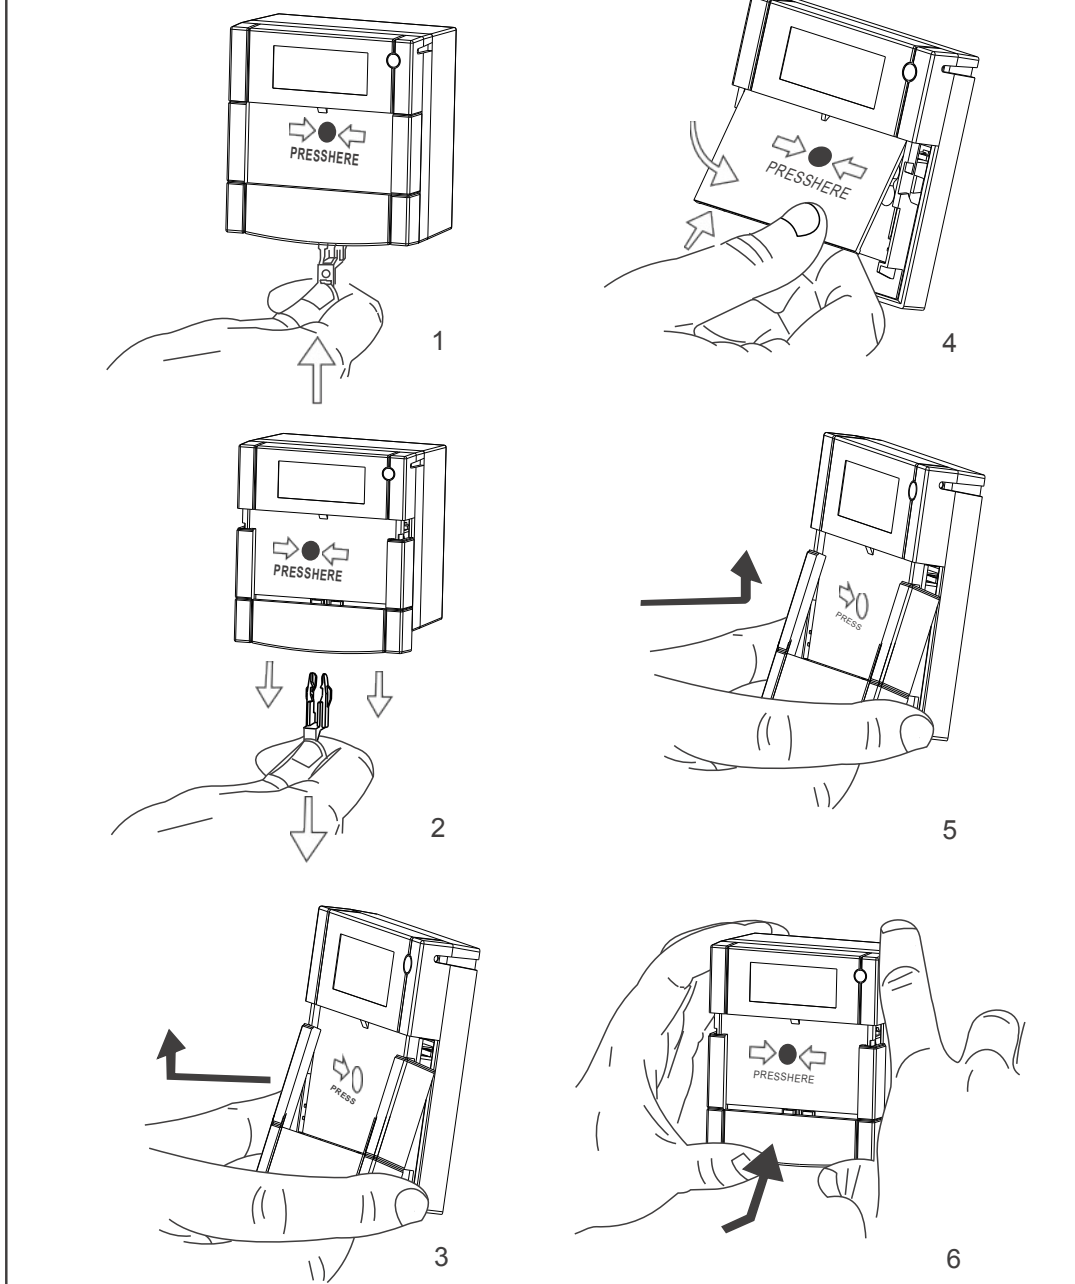

TO RESET

