


Electric Locking Strike Range



Ansi Electric Strike

Technical specifications

- Use with Access and Door entry systems.
- Suitable for wooden doors.
- 12VDC
- Current: 120mA
- DS-003 - Power to Open
- DS-004 - Power to Lock

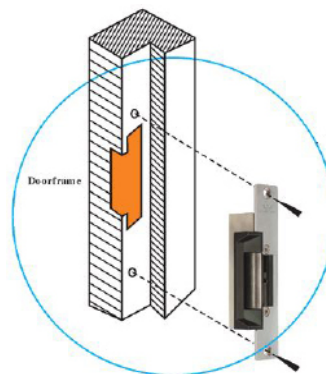

DS-003	150x27/39x34 (mm)	Fail-secure electric ansi strike	402g (Boxed) / 348g (Unboxed)
DS-004	150x27/39x34 (mm)	Fail-safe electric ansi strike	404g (Boxed) / 354g (Unboxed)

FEATURES

- DS-003
 - 400Kg jaw strength.
 - Fail-secure.
 - Mortise face plate only.
- DS-004
 - 400Kg jaw strength.
 - Fail-safe.
 - Mortise face plate only.

Other items in the RGL range.

