

## 4" LCD TFT COLOUR SERVICE MONITOR

### ART.41604




Colour service monitor, 4" TFT active matrix display, shockproof plastic cover, leather case, "AA" rechargeable battery power supply.

#### Specifications:

- Display: 4" LCD TFT active matrix
- Video mode: PAL/NTSC, automatic switch
- Pixel format: RGB 480 (H) x 234 (V)
- Pixel pitch: 0.171 x 0.264 mm
- Contrast: 150:1
- Brightness: 250cd/mq
- Viewing angles: up 10°, down 30°, right 45°, left 45°
- Backlight source: LED (min lifetime 10.000 hr at 25°C)
- Response time (tr/td): 15/20ms
- Composite video input: 1Vpp on 75 ohm, auto termination, BNC connector
- Audio input: 150÷250mVpp, RCA connector
- Power supply: 6 x size "AA" 2200mAH rechargeable batteries (batteries and charger in equipment)
- Power consumption: 3 W
- Operating temperature: from 0° C to + 60° C
- Storage temperature: from -20°C to +80°C
- Humidity: 85% max non condensing
- Dimensions (W x H x D): 152 x 105.6 x 38.6 mm
- Weight: 320g (without batteries).
- Accessories in equipment: rechargeable batteries, charger, leather case, instructions manual, belts

The specifications are subject to variations without warning

**NOTE: The charger is for purpose of charging, it CANNOT be used as a power supply, the monitor will NOT work without batteries!**

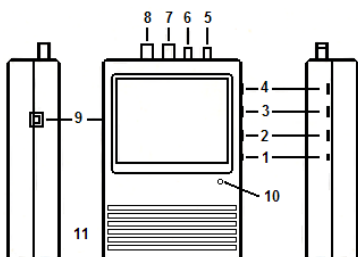

- 1- Turn on / off the monitor
- 2- Adjust speaker volume
- 3- Adjust brightness
- 4- Adjust colour
- 5- Audio out
- 6- Audio in
- 7- Video out
- 8- Video in
- 9- Charger input
- 10- LED indicator (green = monitor ON / red = monitor OFF and batteries under charging / orange = monitor ON and batteries under charging)
- 11- Speaker