


LEM Series

Communication, Paging,
and Entry Security System

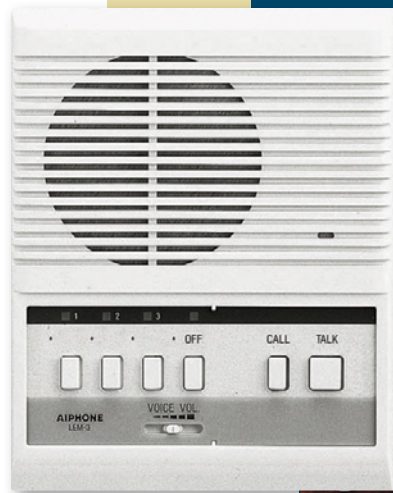

Homes | Offices | Schools | Industrial Facilities

Components - Mix and match up to 3 door/sub stations and 1 master station

Door/Sub Stations - Select up to 3 (includes door stations, sub stations, speakers, and paging adaptors)



LE-D
Audio Only Door Station

- Plastic cover
- Surface mount
- Fits 1-gang box

4-3/4" H
3-7/16" W
1-1/8" D



LE-SS-1G
Audio Only Door Station

- Stainless steel
- Flush mount
- Fits 1-gang box

4-1/2" H
2-3/4" W
2-1/2" D
(back box depth)



LE-DA
Audio Only Door Station

- Stainless steel faceplate
- Flush mount
- Fits 2-gang box

4-1/2" H
4-9/16" W
2-1/2" D
(back box depth)



LE-SS/A
Audio Only Door Station

- Stainless steel
- Flush mount
- Fits 2-gang box

4-3/4" H
4-3/4" W
2-1/2" D
(back box depth)



LE-SSR
Audio Only Door Station

- Red mushroom call button
- Stainless steel
- Flush mount
- Fits 2-gang box

4-3/4" H
4-3/4" W
2-1/2" D
(back box depth)



LE-SSV
Audio Only Door Station

- Built-in CCTV camera
- Stainless steel
- Flush mount
- Fits 2-gang box

4-3/4" H
4-3/4" W
2-1/2" D
(back box depth)



LS-NVP/C
Audio Only Door Station

- Powder-coated steel
- Flush mount
- Fits 3-gang box

7-1/2" H
5-1/2" W
2-1/2" D
(back box depth)

NOTE: Aiphone recommends a 2-1/2" minimum back box depth for all flush mount door stations



LE-A
Audio Only Sub Station

- Surface mount

6-1/4" H
5-1/8" W
2" D



LE-AN
Audio Only Privacy Sub Station

- Surface mount
- Privacy button

6-1/4" H
5-1/8" W
2" D



LE-B
Audio Only Sub Station

- Semi-flush mount

8-3/16" H
6" W
2" D (9/16" goes inside wall)



LE-BN
Audio Only Privacy Sub Station

- Semi-flush mount
- Privacy button

8-3/16" H
6" W
2" D (9/16" goes inside wall)



AH-108
Horn Speaker

- 8Ω, 10W
- Indoor or outdoor use
- Surface mount

Bell Diameter: 6-1/8"
Depth: 6-1/2"



SP-20N
Ceiling Speaker
(Requires NP-25V)

- 20Ω, 4W
- Indoor use
- Flush mount

Diameter: 12-7/8"
Baffle Diameter: 8"



BA-1
Paging Adaptor

4-1/8" H
2-1/2" W
1-1/2" D

Master Stations - Select 1



LEM-1
Audio Only 1-Call Master Station
(For applications using only 1 door/sub station)

- Surface mount

6-1/4" H
5-1/8" W
2" D



LEM-3
Audio Only 3-Call Master Station
(For applications using 2 or 3 door/sub stations)

- Call indicator LED lights
- Surface mount

7-1/8" H
5-5/8" W
2-3/16" D

Power Supply



SKK-620B
6V DC Power Supply
(1 required per master)



Accessories



HID-SS
Card Access Station with HID® ProxPoint® Plus Proximity Card Reader




ICP-BR
Brass Faceplate for LE-DA



ICP-AB
Antique Brass Faceplate for LE-DA



SBX-1G
Surface Mount Box for LE-SS-1G




SBX-2G
Surface Mount Box for LE-DA, LE-SS/A, LE-SSR, or LE-SSV




SBX-2BV
Vertical Surface Mount Box for HID-SS and one LE-DA, LE-SS/A, LE-SSR, or LE-SSV



SBX-NVP
Surface Mount Box for LS-NVP/C



BBX-1E
Back Box for Flush Mounting LE-B or LE-BN



SSB-2
Ceiling Support Bracket for SP-20N



NP-B
Flush Mount Indoor Call Button



NP-W
Surface Mount Box for NP-B




NP-25V
33µF, 25V Non-Polarized Capacitor

Specifications

Spec	Model	LEM-1, LEM-3	LE-A, LE-AN, LE-B, LE-BN, LEF-1C
Power Source		6V DC, 200mA - use SKK-620B	Drawn from master station
Output		350mW	
Wire		2 cond., overall shield (Aiphone wire #822202 or #821802)	
Wire Distance		Door/Sub station to farthest master station: 650' (22AWG), 1,600' (18AWG)	

LEM Series Brochure
07/2013



GS-35F-0065L



ISO-14001 Certified



ISO 9001:2008 Certified



Deming Prize



Aiphone Co. Ltd.

Aiphone Co. Ltd.

Aiphone Corp.

Aiphone Co. Ltd.