



# SFERA NEW - SFERA ROBUR

## 4-pushbutton module on single column

352000

### Description

Additional 4-pushbutton modules arranged on single column. To be used with speaker modules 351000 – 351100 and audio/video modules 351200 - 351300. Connection using the appropriate multicable supplied. Backlighting of nameplates controlled by the speaker module or the audio/video module connected. To be completed with surround plate.

The device must not be configured.


### Related items

- 352031 Sfera New cover plate for 3 pushbuttons on single column - Allmetal (IK 08)
- 352032 Sfera New cover plate for 3 pushbuttons on single column - Allwhite (IK 08)
- 352033 Sfera New cover plate for 3 pushbuttons on single column - Allstreet (IK 08)
- 352041 Sfera New cover plate for 4 pushbuttons on single column - Allmetal (IK 08)
- 352042 Sfera New cover plate for 4 pushbuttons on single column - Allwhite (IK 08)
- 352043 Sfera New cover plate for 4 pushbuttons on single column - Allstreet (IK 08)
- 352035 Sfera Robur cover plate for 3 pushbuttons on single column (IK 10)
- 352045 Sfera Robur cover plate for 4 pushbuttons on single column (IK 10)


### Technical data

Power supply from SCS BUS:	18 - 27 Vdc
Stand by absorption with backlighting LEDs off:	1 mA
Stand by absorption with backlighting LEDs on:	7 mA
Max. operating absorption:	7 mA
Operating temperature:	(-25) – (+70)°C
Protection index (pushbutton panel assembled):	IP 54


Front view

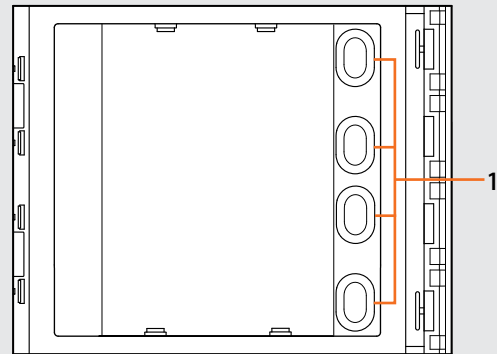

Rear view

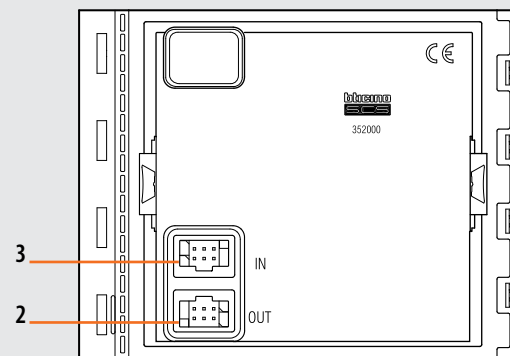

### Dimensional data

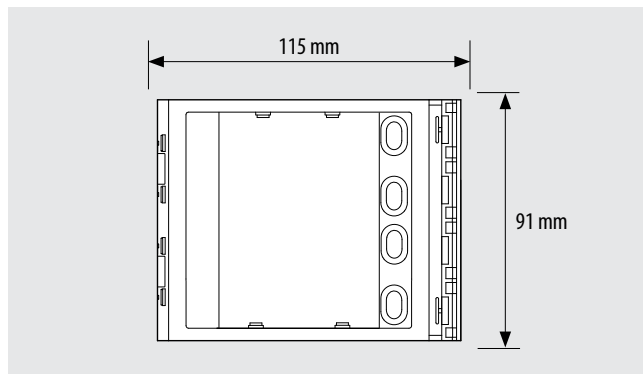

### Legend

1. Call pushbuttons
2. Connector for the connection to subsequent pushbutton modules
3. Connector for the connection to previous modules

BT00599-a-EN