



■ PRODUCT DRAWING

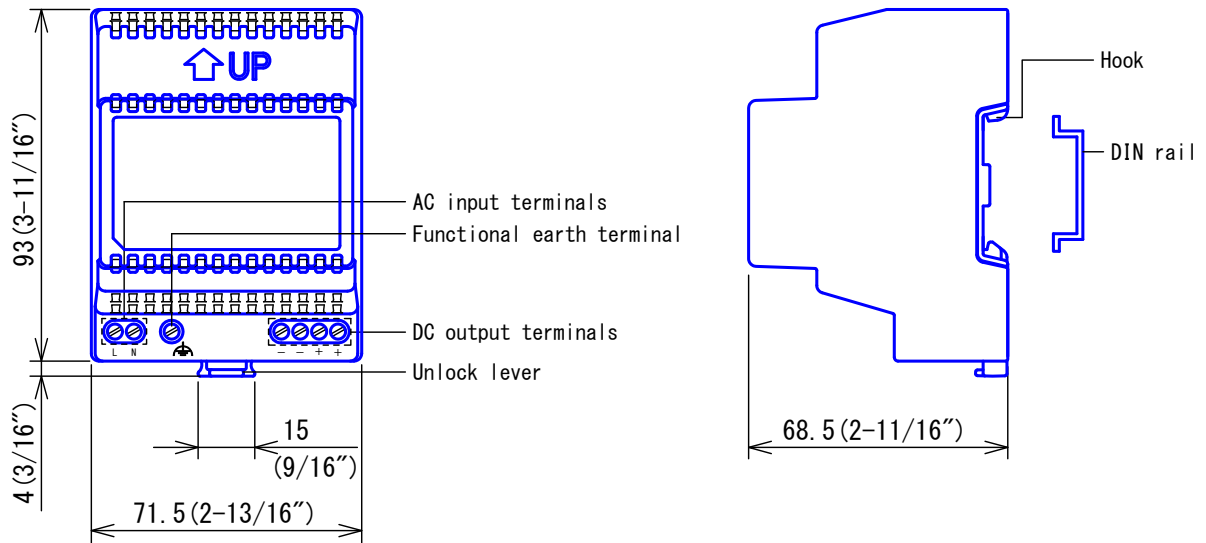

● MOUNTING

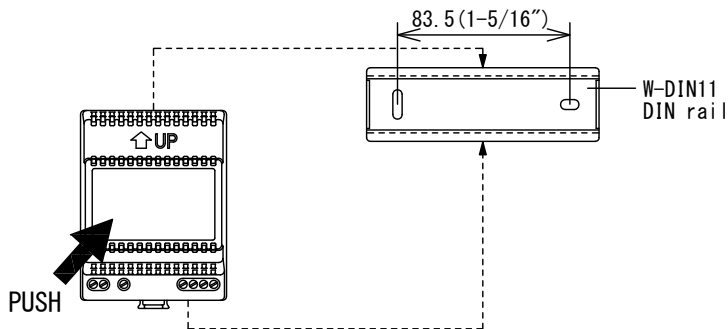

Mount DIN rail to wall board inside an electrical enclosure.
Attach PS-1820DM to DIN rail aligning at the hook and pushing bottom until it clicks to lock.

■ RESTRICTIONS

- Do not connect any power source other than specified to +, -, nor install two power supplies in parallel to single input. Doing so may cause fire or damage the unit.
- Power supply shall be located not more than specified wiring distance for each system.

■ SPECIFICATIONS

Power source	AC 230V, 50/60Hz.
Power consumption	40.3W
Secondary output voltage	DC 18V
Secondary output current	2.0A
Housing	Self-extinguishing ABS plastic
Weight	Approx. 220g (0.485 lbs)
Ambient temperature	0~40°C (32~104° F)
Mounting	DIN rail

DESCRIPTION POWER SUPPLY (18V DC, 2.0A)	FIG. NAME PRODUCT/RESTR./SPEC.	UNIT mm	DATE 4 December, 2017
MODEL NO. PS-1820DM	FIG. NO. P60493-1-1	PAGE 1/1	REVISION 1

AIPHONE