

Datasheet

CDV-91S - 2-Wire 1-Button Video Door Station

Product Description

The CDV-91S is a modern slimline door station available as a single button unit only and features a 170° fisheye camera with audible operation annunciation such as “call is in progress”.

Part of the 2EASY range, the CDV-91S is compatible with all 2EASY 2-Wire system models and is included in the CDV-4791SA-DX kits.

With a built-in microphone and speaker, the CDV-91S also benefits from compact and low-profile styling for your building entrance.

2EASY



Key Features

- Slimline single-button door station
- 170° fisheye camera
- Built-in speaker and microphone
- Adjustable unlocking time (1-9 sec)
- Live viewing via monitor
- Compatible with all 2EASY 2-Wire products
- Answer the door via the VDP Connect app! (only with [CDV-470DX](#) monitor)

 Certification

 DEEE


RoHS Certification

 IP44

 -15°C to 55°C

Product Specifications

Material:	Stainless steel panel
Mounting:	Surface
Technology:	2-wire, no polarity
User limit:	Up to 4 monitors (1x CDV-470DX, 3 x CDV-47)
Camera:	Color CMOS, 2.0 mega pixel, 1/2.7" 170° fisheye camera
Unlocking time:	1 to 9 sec
Relays:	1 (2 with CDV-RLC via monitor)
Cable type:	Belden 8471, 16AWG (recommended)
Wiring distance:	Max 80m to power supply
Weight:	0.31 kg

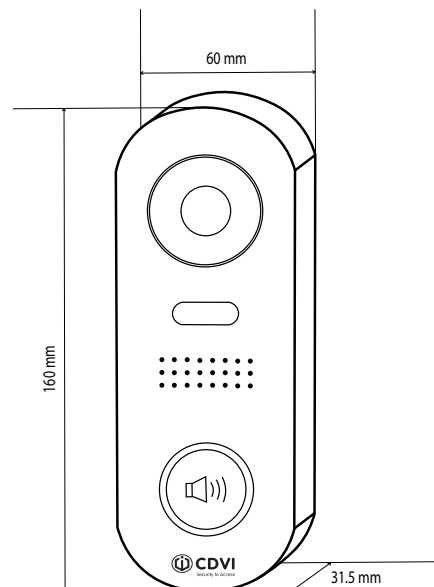

Electrical Specifications

Power input:	24 Vdc
Consumption:	14mA (standby) 122mA (in operation)
Lock power supply:	12V



Accessories




CDV-PC9

Power/bus combiner module



CDV-DBC4A

4-way bus distribution unit



CDV-RLC

Additional relay module